BNC Jack Bulkhead





Specifications:

Connector Type : BNC Coaxial Body Style : Bulkhead Jack

 $\begin{array}{lll} \mbox{Coaxial Termination} & : \mbox{Crimp} \\ \mbox{Impedance} & : \mbox{50} \mbox{\Omega} \\ \mbox{Coaxial Cable Types} & : \mbox{RG-174} \\ \end{array}$

Contact Material : Beryllium Copper

Contact Plating : Silver Frequency Max : 11GHz Connector Mounting : Panel Cable Diameter Max : 2.54mm **Contact Material** : Brass Contact Resistance : 1.5mΩ DC Current Max : 1A Insulator Material : PTFE

Material : Brass with Silicone Gaskets


Operating Temperature : -65°C to +165°C Proof Voltage : 2kV

VSWR : 1.35
Working Voltage : 500V



BNC Jack Bulkhead



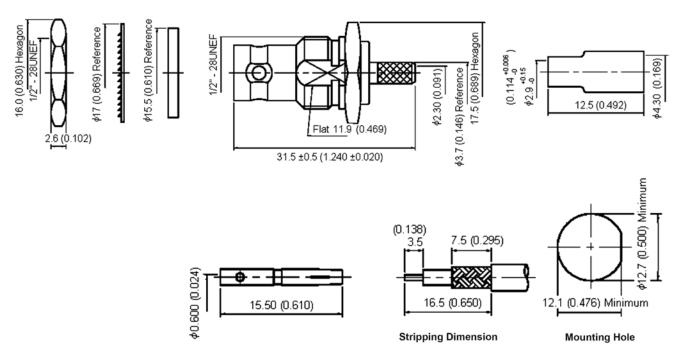

Dimensions: Millimetres (Inches)

Number	Description	Material	Finish
1	Nut	Brass	
2	Washer	Iron	Silver 70μ" Min.
3	Body	Brass	
4	Insulation	PTFE	None
5	Gasket	Silicone	
6	Chassis	Droop	
7	Crimp Ferrule	Brass Silver 70µ" Min.	
8	Centre Contact	Beryllium Copper	

Part Number Table

Description	Part Number	
Jack BNC, Bulkhead, Crimp, 50R	13-11 TSS RG174U	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

