# Surface Mount Schottky Barrier Diode



ANODE



#### Features:

- Low Forward Voltage Drop
- Fast Switching
- Ultra-Small Surface Mount Package
- PN Junction Guard Ring for Transient and ESD Protection

Applications: Schottky barrier diode



CATHODE

-0 2 ANODE

SOT-523

## Max. Rating @ T<sub>A</sub> = 25°C unless otherwise specified

Parameter	Symbol	Limits	Unit
Peak repetitive peak reverse voltage Working peak reverse voltage DC reverse voltage	Vrrm Vrms Vr	30	V
Forward continuous voltage	lF	200	mA
Repetitive peak forward voltage	IFRM	300	mA
Non-repetitive peak forward surge current @t<1.0s	IFSM	600	mA
Power dissipation	Po	150	mW
Thermal resistance, junction to ambient	Reja	833	°C/W
Junction and storage temperature	Т <sub>ј</sub> , Тsтg	-65 to +150	°C

## Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified


Parameter	Symbol	Conditions	Min.	Max.	Unit
Reverse breakdown voltage	V(br)	IR = 100μA	30	-	V
Leakage current	lr	VR = 25V	-	2	μA
Forward voltage	VF	IF = 0.1mA IF = 1mA IF = 10mA IF = 30mA IF = 100mA	-	240 320 400 500 1,000	mV
Typical total capacitance	Ст	VR = 1V, f = 1MHz	-	10	pF
Reverse recovery time	trr	IF = IR = 10mA IR = 1mA RL = 100Ω	-	5	ns

www.element14.com www.farnell.com www.newark.com





## Typical Characteristics @ TA = 25°C unless otherwise specified

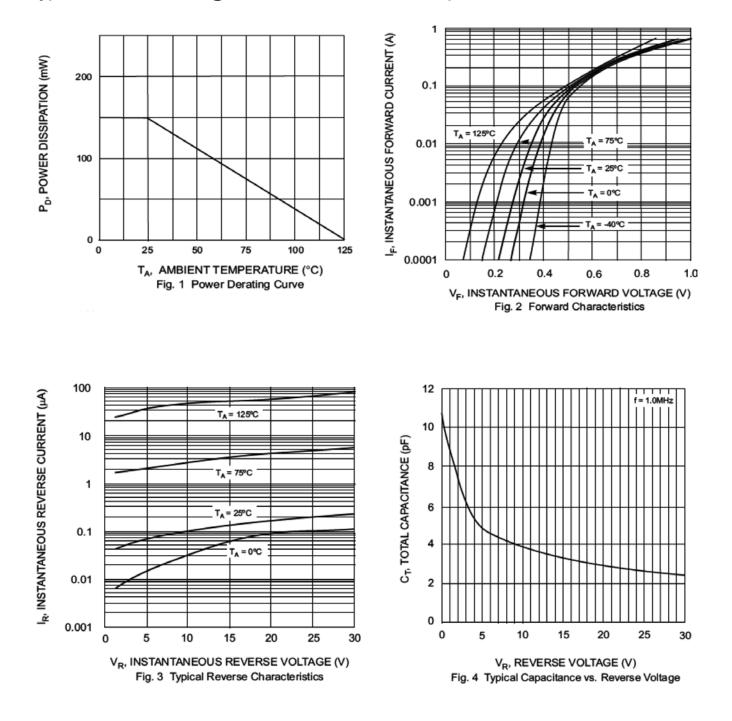


www.element14.com www.farnell.com www.newark.com






## Plastic surface mounted package



SOT-523			
Dim	Min	Max	
А	1.5	1.7	
В	0.75	0.85	
С	0.6	0.8	
D	0.15	0.3	
G	0.9	1.1	
н	0.02	0.1	
J	0.1Typical		
К	1.45	1.75	
All Dimensions in mm			

#### **Soldering Footprint**



## **Package Information**

Device	Package	Shipping
BAT54CT-7-F	SOT-523	3,000 / Tape & Reel

## **Part Number Table**

Unit : mm

Description	Part Number
Surface Mount Schottky Barrier Diode	BAT54CT-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

