

E3Z-B

Reliable Detection of Transparent Objects, Including Thin-walled Clear, Plastic Bottles

- Uses OMRON's unique optical system ("Inner View") that can detect various shapes of clear, plastic bottles.
- Detects a wide range of bottles from 500-ml bottles to 2-l bottles, and from single bottles to sets of stocked bottles.
- Provides a high degree of protection (IP67), mutual interference prevention, and EN standard compliance.



Be sure to read *Safety Precautions* on page 4.

Ordering Information

Sensors

Red light

Sensing method	Appearance	Connection method	Sensing distance	Model		
				NPN output	PNP output	
Retro-reflective (without MSR function) *1		Pre-wired (2 m)		500 mm (80 mm) *2	E3Z-B61 2M *4	E3Z-B81 2M *4 *5
		Connector (M8, 4 pins)			E3Z-B66	E3Z-B86
		Pre-wired (2 m)		2 m (500 mm) *2	E3Z-B62 2M *4 *5	E3Z-B82 2M *4 *5
		Connector (M8, 4 pins)			E3Z-B67	E3Z-B87

*1. The Reflector is sold separately.

*2. The specified sensing distance is possible when the E39-R1S is used. Values in parentheses indicate the minimum required distance between the Sensor and the Reflector.

*3. Install the Sensor so that plastic bottles are at least 500 mm from the Sensor when they pass.

*4. Models with a 0.5-m cable are available. When ordering, specify the cable length by adding the code "0.5M" to the model number (e.g., E3Z-B61 0.5M).

*5. M12 Standard Pre-wired Connector Models are also available.

When ordering, add "-M1J 0.3M" to the end of the model number (e.g., E3Z-B62-M1J 0.3M).
The cable is 0.3 m long.

Accessories (Order Separately)

Reflectors

Type	Model	Sensing distance (typical)		Quantity	Remarks
		E3Z-B□1/-B□6	E3Z-B□2/-B□7		
Standard	E39-R1S			1	The E3Z-B is not provided with a Reflector.
Fog Preventive Coating	E39-R1K			1	

* Values in parentheses indicate the minimum required distance between the Sensor and Reflector.

Mounting Brackets

Refer to E3Z for details.

Sensor I/O Connectors

Refer to E3Z for details.

Ratings and Specifications

Sensing method		Retro-reflective (without MSR function)			
Item	Model	E3Z-B61	E3Z-B66	E3Z-B62	E3Z-B67
	NPN output	E3Z-B81	E3Z-B86	E3Z-B82	E3Z-B87
Sensing distance		500 mm (80 mm) *1 (using E39-R1S)		2 m (500 mm) *1 *2 (using E39-R1S)	
Standard sensing object		500-ml (65-mm dia.) transparent round plastic bottles			
Light source (wavelength)		Red LED (680 nm)			
Power supply voltage		12 to 24 VDC±10%, ripple (p-p): 10% max.			
Current consumption		30 mA max.			
Control output		Load power supply voltage: 26.4 VDC max., Load current: 100 mA max. Residual voltage: Load current of less than 10 mA: 1 V max. Load current of 10 to 100 mA: 2 V max. Open collector output (NPN/PNP depending on model) Light-ON/Dark-ON selectable			
Protection circuits		Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection			
Response time		Operate or reset: 1 ms max.			
Sensitivity adjustment		One-turn adjuster			
Ambient illumination (Receiver side)		Incandescent lamp: 3,000 lx max. Sunlight: 10,000 lx max.			
Ambient temperature range		Operating: -25 to 55°C, Storage: -40 to 70°C (with no icing or condensation)			
Ambient humidity range		Operating: 35% to 85%, Storage: 35% to 95% (with no condensation)			
Insulation resistance		20 MΩ min. at 500 VDC			
Dielectric strength		1,000 VAC, 50/60 Hz for 1 min			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 500 m/s ² 3 times each in X, Y, and Z directions			
Degree of protection		IP67 (IEC60529)			
Connection method		Pre-wired cable (standard length: 2 m and 0.5 m)	Connector (M8, 4 pins)	Pre-wired cable (standard length: 2 m and 0.5 m)	Connector (M8, 4 pins)
Indicator		Operation indicator (orange) Stability indicator (green)			
Weight (packed state)	Pre-wired cable (2 m)	Approx. 65 g			
	Standard Connector	Approx. 20 g			
Material	Case	PBT (polybutylene terephthalate)			
	Lens	Modified polyarylate			
Accessories		Instruction manual (The Reflector or Mounting Bracket are ordered separately.)			

*1. Values in parentheses indicate the minimum required distances between the Sensors and Reflectors.


*2. Plastic bottles must pass with the minimum clearance of 500 mm.

Engineering Data (Typical)

Parallel Operating Range


E3Z-B□1/B□6 + E39-R1S

Reflector (Order Separately)

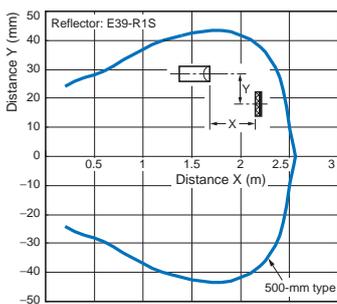

E3Z-B□2/B□7 + E39-R1S


Reflector (Order Separately)

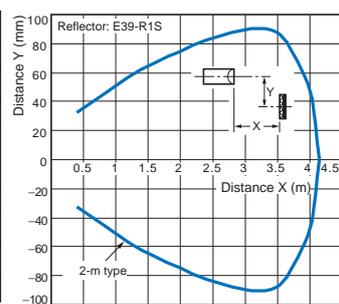

Excess Gain vs. Set Distance


E3Z-B□1/B□6 + E39-R1S

Reflector (Order Separately)

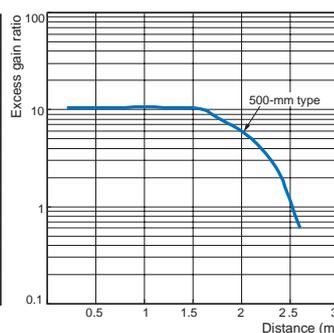

E3Z-B□2/B□7 + E39-R1S

Reflector (Order Separately)

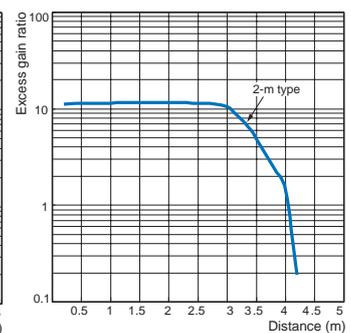

I/O Circuit Diagrams

NPN Output


Model	Operation mode	Timing charts	Operation selector	Output circuit
E3Z-B61 E3Z-B62 E3Z-B66 E3Z-B67	Light-ON	Incident light: ON (green bar) No incident light: OFF (white bar) Operation indicator (orange): ON (green bar) OFF (white bar) Output transistor: ON (green bar) OFF (white bar) Load Operate (e.g., relay) Reset: ON (green bar) OFF (white bar) (Between brown and black leads)	L side (LIGHT ON)	Retro-reflective Model
	Dark-ON	Incident light: OFF (white bar) No incident light: ON (green bar) Operation indicator (orange): OFF (white bar) ON (green bar) Output transistor: OFF (white bar) ON (green bar) Load Operate (e.g., relay) Reset: OFF (white bar) ON (green bar) (Between brown and black leads)	D side (DARK ON)	Connector Pin Arrangement

PNP Output

Model	Operation mode	Timing charts	Operation selector	Output circuit
E3Z-B81 E3Z-B82 E3Z-B86 E3Z-B87	Light-ON	Incident light: ON (green bar) No incident light: OFF (white bar) Operation indicator (orange): OFF (white bar) ON (green bar) Output transistor: OFF (white bar) ON (green bar) Load Operate (e.g., relay) Reset: ON (green bar) OFF (white bar) (Between blue and black leads)	L side (LIGHT ON)	Retro-reflective Model
	Dark-ON	Incident light: OFF (white bar) No incident light: ON (green bar) Operation indicator (orange): OFF (white bar) ON (green bar) Output transistor: OFF (white bar) ON (green bar) Load Operate (e.g., relay) Reset: OFF (white bar) ON (green bar) (Between blue and black leads)	D side (DARK ON)	Connector Pin Arrangement

Plugs (Sensor I/O Connectors)

M8 connector

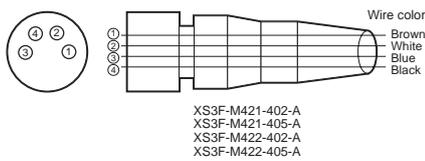

Pin arrangement

Classification	Wire color	Connector pin No.	Application
DC	Brown	1	Power supply (+V)
	White	2	---
	Blue	3	Power supply (0 V)
	Black	4	Output

Note: Pin 2 is not used.

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

● Designing

Bottles

The Sensor may be unable to achieve stable detection depending on the shape of the bottles or the position in which the bottles pass. Be sure to verify stable detection before using the Sensor.

● Mounting

Sensor Mounting

If the Sensor fails to provide stable detection due to the shape of the bottles or the position in which the bottles pass, adjust the location and inclination of the Sensor.

Dimensions

(Unit: mm)


Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

Sensors

Retro-reflective Models


Pre-wired Models

E3Z-B61
E3Z-B81
E3Z-B62
E3Z-B82

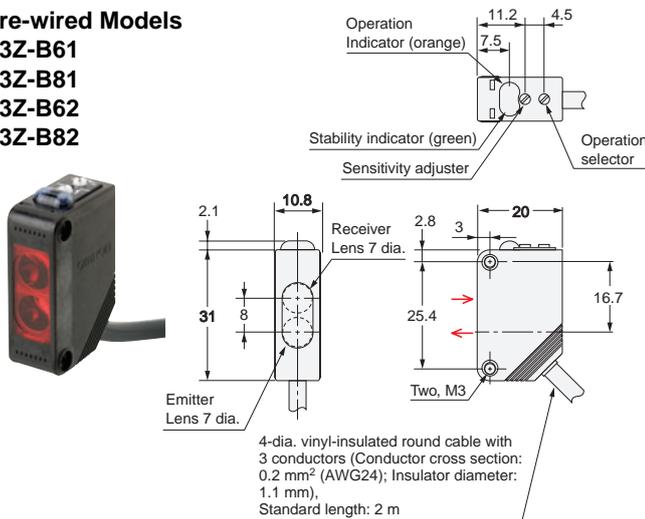


Connector Models


E3Z-B66
E3Z-B86
E3Z-B67
E3Z-B87

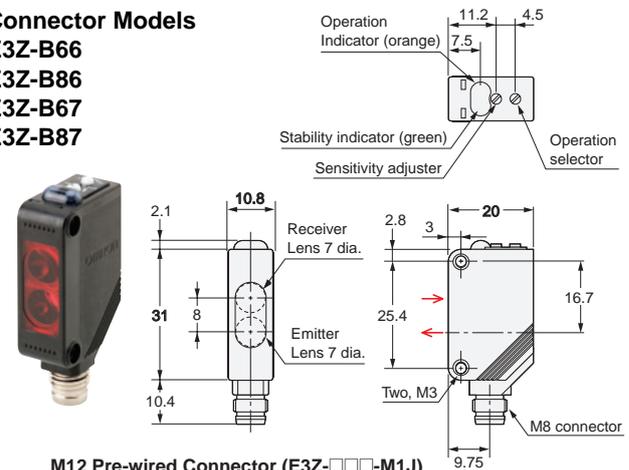

M12 Pre-wired Connector (E3Z-□□□-M1J)

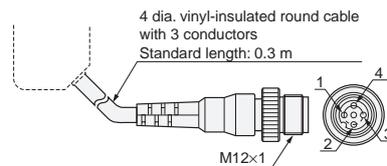

M8 Pre-wired Connector (E3Z-T□□-K-M3J)

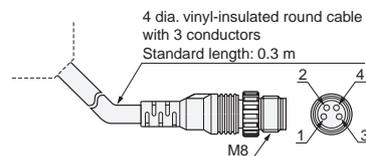

Terminal No.	Specifications
1	+V
2	---
3	0 V
4	Output

Accessories (Order Separately)

Reflectors

Refer to *E39-R* for details.

Mounting Brackets

Refer to *E39-L* for details.

Sensor I/O Connectors

Refer to *XS2F*, *XS3F* and *E3Z (E39-ECON□)* for details.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2013.1

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2013 All Right Reserved.