



Features

- Screw-down connection
- Improved connection for better efficiency
- 2 x 16 mm² wire connection
- Adapted to Bourns® Model 1210 and 1250 Series Surge Protective Devices (SPDs)

Applications

- Electrical service entrance
- Branch panels

Model 1200TA Terminal Adapter


Characteristics

The Bourns® Model 1200TA Terminal Adapter is designed to improve the wiring efficiency of Model 1210 and 1250 Series SPDs. This add-on adapter allows for efficient and safe parallel connections. This method of connection is highly recommended and minimizes voltage drops in parallel connections.


Characteristics

Torque.....	2-2.5 Nm (18-22 lb-in)
Min.-Max. Cross Section	2.5-16 mm ² (13-5 AWG)
Insulation Material	Polycarbonate UL-94V0
Metal Material.....	Brass
Mounting.....	Model 1210 & 1250 SPDs

Product Dimensions

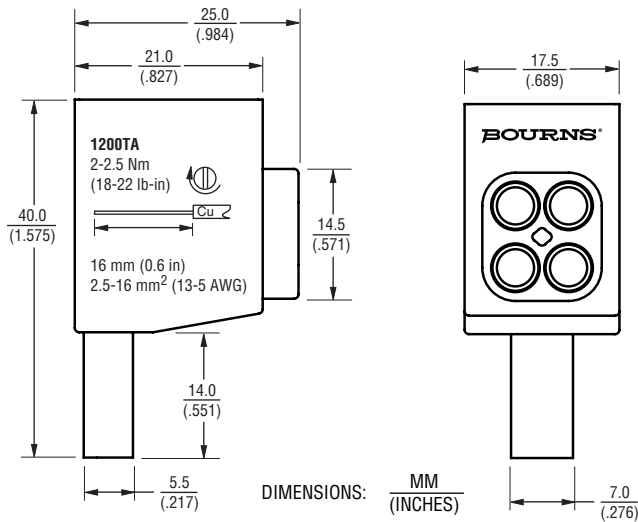

Electrical Diagram (1-pole)

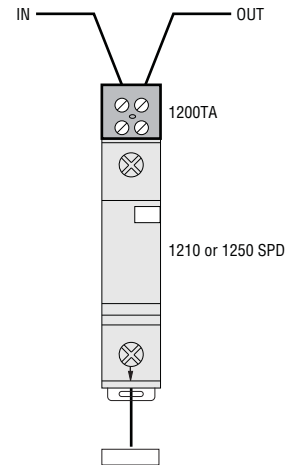

Installation



How to Order

Bourns Part Number..... 1200TA

Packaging Specifications

Standard Packaging 8 pieces per package

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116
Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510
The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700
www.bourns.com

REV. 05/13

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.