

March 2013

FCH35N60

N-Channel SuperFET[®] MOSFET 600 V, 35 A, 98 m Ω

Features

- 650 V @ T_J = 150°C
- Typ.R_{DS(on)} = 79 m Ω
- Ultra Low Gate Charge (Typ. Q_g = 139 nC)
- Low Effective Output Capacitance (Typ. C_{oss}.eff = 340 pF)
- · 100% Avalanche Tested


Application

- · Solar Inverter
- AC-DC Power Supply

Description

SuperFET® MOSFET is Fairchild Semiconductor® s first generation of high voltage super-junction (SJ) MOSFET family that is utilizing charge balance technology for outstanding low on-resistance and lower gate charge performance. This technology is tailored to minimize conduction loss, provide superior switching performance, dv/dt rate and higher avalanche energy. Consequently, SuperFET MOSFET is very suitable for the switching power applications such as PFC, server/telecom power, FPD TV power, ATX power and industrial power applications.





MOSFET Maximum Ratings T_C = 25°C unless otherwise noted*

Symbol		Parameter		FCH35N60	Unit
V _{DSS}	Drain to Source Voltage			600	V
V _{GSS}	Gate-Soure voltage			±30	V
	Drain Current	-Continuous (T _C = 25°C)		35	А
ID	Diamounem	-Continuous (T _C = 100°C)		22.2	A
I _{DM}	Drain Current	- Pulsed	(Note 1)	105	Α
E _{AS}	Single Pulsed Avalanche Energy		(Note 2)	1455	mJ
I _{AR}	Avalanche Current		(Note 1)	35	Α
E _{AR}	Repetitive Avalanche Ener	gy	(Note 1)	31.25	mJ
dv/dt	Peak Diode Recovery dv/d	t	(Note 3)	20	V/ns
D	Dower Dissination	(T _C = 25°C)		312.5	W
P_{D}	Power Dissipation	- Derate above 25°C		2.5	W/°C
T _J , T _{STG}	Operating and Storage Temperature Range			-55 to +150	°C
T _L	Maximum Lead Temperature for Soldering Purpose, 1/8" from Case for 5 Seconds			300	°C

*Drain current limited by maximum junction temperature

Thermal Characteristics

Symbol	Parameter	Тур.	Max.	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	-	0.4	
$R_{\theta CS}$	Thermal Resistance, Case-to-Heat Sink	0.24	-	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	-	42	

Package Marking and Ordering Information T_C = 25°C unless otherwise noted

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FCH35N60	FCH35N60	TO-247	-	-	30

Electrical Characteristics

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Off Charac	cteristics					
D\/	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V, T_J = 25^{\circ} C$	600	-	-	V
BV_{DSS}	Dialii to Source Breakdowii voltage	$I_D = 250 \mu A, V_{GS} = 0 V, T_J = 150^{\circ} C$	-	650	-	V
ΔBV _{DSS} / ΔT _J	Breakdown Voltage Temperature Coefficient	I _D = 250 μA, Referenced to 25°C	-	0.6	-	V/°C
BV _{DS}	Drain-Source Avalanche Breakdown Voltage	V _{GS} = 0 V, I _D = 16 A	-	700	-	V
ı	Zoro Cata Valtaga Prain Current	V _{DS} = 600 V, V _{GS} = 0 V	-	-	1	
IDSS	Zero Gate Voltage Drain Current	$V_{DS} = 480 \text{ V}, T_{C} = 125^{\circ}\text{C}$	-	-	10	μΑ
I _{GSS}	Gate to Body Leakage Current	$V_{GS} = \pm 30 \text{ V}, V_{DS} = 0 \text{ V}$	-	-	±100	nA

On Characteristics

V _{GS(th)}	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = 250 \mu\text{A}$	3.0	-	5.0	V
R _{DS(on)}	Static Drain to Source On Resistance	$V_{GS} = 10 \text{ V}, I_D = 17.5 \text{ A}$	-	0.079	0.098	Ω
9 _{FS}	Forward Transconductance	V _{DS} = 40 V, I _D = 17.5 A	-	28.8	-	S

Dynamic Characteristics

C _{iss}	Input Capacitance	V 05 V V 0 V	-	4990	6640	pF
C _{oss}	Output Capacitance	V _{DS} = 25 V, V _{GS} = 0 V — f = 1 MHz	-	2380	3170	pF
C _{rss}	Reverse Transfer Capacitance	1 - 1 1/11/12	-	140	-	pF
C _{oss}	Output Capacitance	V _{DS} = 480 V, V _{GS} = 0 V, f = 1.0 MHz	-	113	-	pF
Coss eff.	Effective Output Capacitance	V _{DS} = 0 V to 480 V, V _{GS} = 0 V		340	-	pF
Qg	Total Gate Charge at 10V		-	139	181	nC
Q_{gs}	Gate to Source Gate Charge	$V_{DS} = 480 \text{ V}, I_{D} = 35 \text{ A}$	-	31	-	nC
Q_{gd}	Gate to Drain "Miller" Charge	V _{GS} = 10 V (Note 4)	-	69	-	nC
ESR	Equivalent Series Resistance (G-S)	Drain Open, F= 1 MHZ	-	1.4	-	Ω

Switching Characteristics

$t_{d(on)}$	Turn-On Delay Time			-	34	78	ns
t _r	Turn-On Rise Time	V _{DD} = 300 V, I _D = 35 A		-	120	250	ns
t _{d(off)}	Turn-Off Delay Time	$R_G = 4.7 \Omega$		-	105	220	ns
t _f	Turn-Off Fall Time	(Note	e 4)	-	73	155	ns

Drain-Source Diode Characteristics

I _S	Maximum Continuous Drain to Source Diode Forward Current		-	-	35	Α
I _{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	105	Α
V _{SD}	Drain to Source Diode Forward Voltage	V _{GS} = 0 V, I _{SD} = 35 A	-	-	1.4	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0 V, I _{SD} = 35 A	-	614	-	ns
Q _{rr}	Reverse Recovery Charge	$dI_F/dt = 100 A/\mu s$	-	16.3	-	μС

- $\label{eq:Notes:Notes:} \begin{tabular}{ll} \textbf{Notes:} \\ 1: & \textbf{Repetitive Rating: Pulse width limited by maximum junction temperature} \\ 2: & \textbf{I}_{AS} = 17.5 \ \text{A, } V_{DD} = 50 \ \text{V, } R_G = 25 \ \Omega, \ \text{Starting } T_J = 25^{\circ} \text{C} \\ 3: & \textbf{I}_{SD} \le 35 \ \text{A, di/dt} \le 200 \ \text{A/µs, } V_{DD} \le BV_{DSS}. \ \text{Starting } T_J = 25^{\circ} \text{C} \\ 4: & \textbf{Essentially Independent of Operating Temperature Typical Characteristics} \\ \end{tabular}$

Typical Performance Characteristics

Figure 1. On-Region Characteristics




Figure 3. On-Resistance Variation vs.

Drain Current and Gate Voltage




Figure 5. Capacitance Characteristics




Figure 2. Transfer Characteristics




Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature





Figure 6. Gate Charge Characteristics



Typical Performance Characteristics (Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature




Figure 8. On-Resistance Variation vs. Temperature




Figure 9. Maximum Safe Operating Area




Figure 10. Maximum Drain Current vs. Case Temperature







Figure 11. Transient Thermal Response Curve

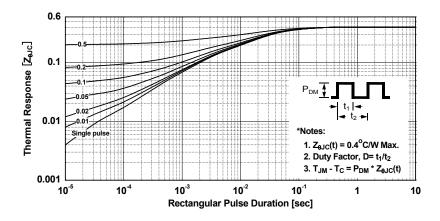


Gate Charge Test Circuit & Waveform

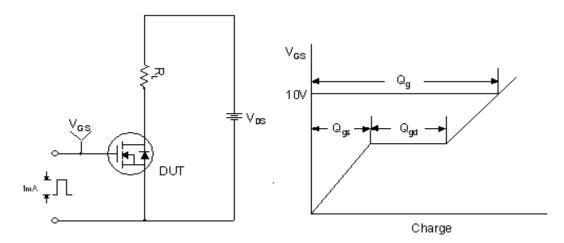



Resistive Switching Test Circuit & Waveforms

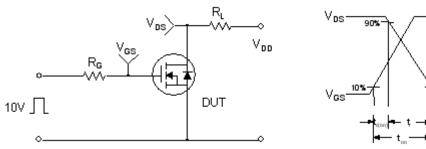





Unclamped Inductive Switching Test Circuit & Waveforms

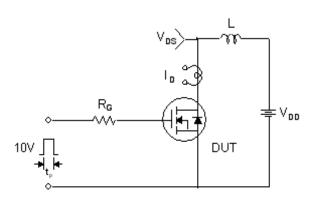

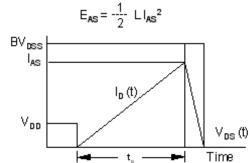

Peak Diode Recovery dv/dt Test Circuit & Waveforms

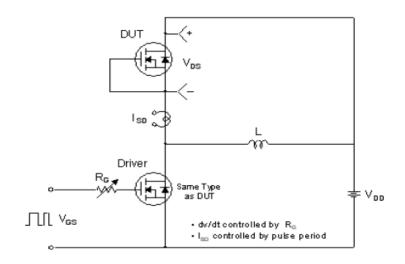


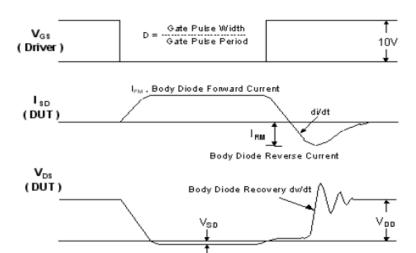

Body Diode Forward Voltage Drop

Mechanical Dimensions

TO-247

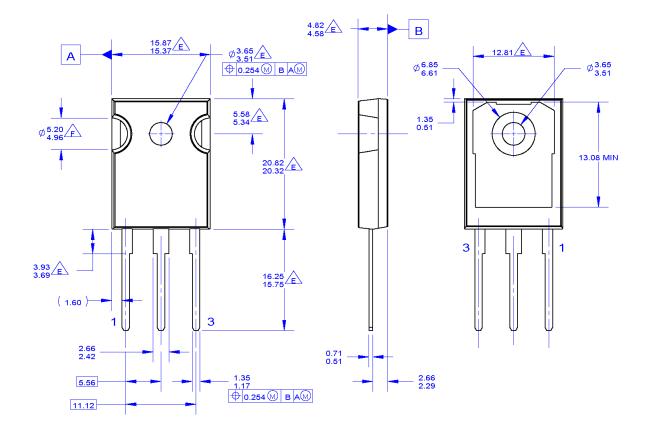

NOTES: UNLESS OTHERWISE SPECIFIED.

- PACKAGE REFERENCE: JEDEC TO-247, ISSUE E, VARIATION AB, DATED JUNE, 2004.
 DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
 ALL DIMENSIONS ARE IN MILLIMETERS.
- D. DRAWING CONFORMS TO ASME Y14.5 1994
- DOES NOT COMPLY JEDEC STANDARD VALUE

NOTCH MAY BE SQUARE
G. DRAWING FILENAME: MKT-TO247A03_REV03

Dimensions in Millimeters





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

(1)_®

2Cool™ FPS™ AccuPower™ F-PFS™ AX-CAP® FRFET® Global Power ResourceSM BitSiC™

Build it Now™ Green Bridge™ CorePLUS™ Green FPS™ Green FPS™ e-Series™

CorePOWER™ $CROSSVOLT^{\text{TM}}$ CTL™

GTO™ Current Transfer Logic™ IntelliMAX™ DEUXPEED® ISOPLANAR™

Dual Cool™ Marking Small Speakers Sound Louder EcoSPARK® and Better™ MegaBuck™ EfficentMax™

Gmax™

ESBC™ MICROCOUPLER™ MicroFET™

MicroPak™ MicroPak2™ Fairchild® MillerDrive™ Fairchild Semiconductor® MotionMax™ FACT Quiet Series™ mWSaver™ FACT[®] FAST® OptoHiT™ OPTOLOGIC® FastvCore™ OPTOPLANAR® FETBench™

PowerTrench® PowerXS™

Programmable Active Droop™

QFET® QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™ SMART START™

Solutions for Your Success™

STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6

SuperSOT™-8 SupreMOS® SyncFET™

Sync-Lock™

SYSTEM®' TinvBoost¹ TinyBuck™ TinyCalc™ TinyLogic® TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC® TriFault Detect™ TRUECURRENT®*

UHC® Ultra FRFET™ UniFET™ VCX™

uSerDes™

VisualMax™ VoltagePlus™ XS™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed Full Production		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete Not In Production		Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 164