

LED Candle Light



**RoHS
Compliant**

Features

- Consumes only 4W to replace 25W halogen or incandescent lighting
- Dimmable and compatible with most of the electronic transformers
- Long life span and energy saving
- E12 base available
- Torpedo Shaped, clear cover, virtual flame effect
- No UV, IR, without Mercury or any other hazardous substances


Benefits & Applications

- Decorative lighting of various commercial places, hotel, shopping malls, etc.
- Residential lighting such as aisle, corridor, storehouse, etc.
- Suitable for shop window, painting displaying, artwork performance etc.
- Entertainment lighting cafe, bar etc.

Specification Table

Voltage	Lamp Shape	Base Type	Power (Watts)	CCT (Kelvin)	Beam Angle (Degree)	Initial Lumens (lm)	Efficacy (lmw)	Rated Life (hrs)	CRI	Power Factor	Dimmable	Part Number
120V	Candle light	E12	4	3,000	200	270	67.5	30,000	80	0.8	Yes	CA04E1230KCR
				4,000		300	75.0					CA04E1240KCR

Product Dimension

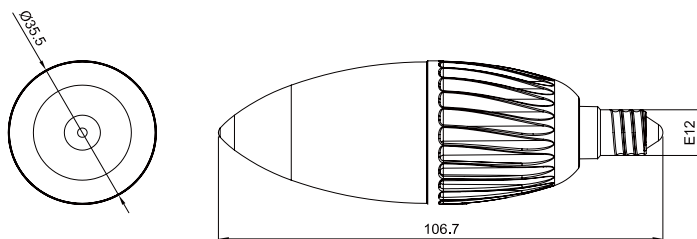

Dimensions : Millimetres

Part Number Table

Description	Part Number
LED Candle Light	CA04E1230KCR
	CA04E1240KCR

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

