

## CP M SNT 180W 24V 7,5A

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



### PRO-M = Power-Reliable-Optimized

The perfectly reliable power supply for automation technology.

The ten different versions for the 24V-DC power supply all feature a solid but thin metal housing which enables them to be installed without any side gaps. This results in less space required on the mounting rail. Wide range of AC/DC inputs and a wide temperature range enable them to be used anywhere. Because of its high efficiency, resistance to overloads and high power reserves, the PRO-M is a trusted power supply for use in any application. The three-phase PRO-M power supply modules continue to function reliably when one phase fails (i.e., in two-phase mode).

### General ordering data

Type	CP M SNT 180W 24V 7,5A
Order No.	<a href="#">895135000</a>
Version	Power supply, switch-mode power supply unit
GTIN (EAN)	4032248742561
Qty.	1 pc(s).

## CP M SNT 180W 24V 7,5A

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Width	50 mm	Height	130 mm
Depth	150 mm	Weight	1.05 kg
Net weight	1,080 g		

### Temperatures

Operating temperature	-25 °C...+70 °C	Storage temperature	-40 °C...+85 °C
-----------------------	-----------------	---------------------	-----------------

### Input

AC current consumption	0.9 A @ 230 V AC / 1.8 A @ 115 V AC	AC input voltage range	85...264 V AC (Derating @ 100 V AC)
DC current consumption	0.6 A @ 370 V DC / 1.7 A @ 120 V DC	DC input voltage range	80...370 V DC (Derating @ 120 V DC)
Frequency range AC	47...63 Hz	Input fuse	Yes
Input fuse (internal)	Yes	Inrush current	max. 40 A
Recommended back-up fuse	6 A / DI, safety fuse 10 A, Char. B, circuit breaker 6 A, Char. C, circuit breaker	Wire connection method	Screw connection
rated input voltage	100...240 V AC (wide-range input)		

### output

Output current	7.5 A	Output power	180 W
Output voltage type	DC	Output voltage, max.	29.5 V
Output voltage, min.	22.5 V	Output voltage, note	(adjustable via potentiometer on front)
Overload protection	Yes	Parallel connection option	yes, max. 5
Powerboost @ 24 V DC, 60 °C	9 A for 1 min, ED = 5 %	Rated (nominal) output current @ U <sub>Nom</sub>	7.5 A @ 60 °C
Wire connection method	Screw connection	continuous output current @ 24 V DC	9.0 A @ 45 °C, 8.0 A @ 55 °C, 5.6 A @ 70 °C
rated output voltage	24 V DC ± 1 %	residual ripple, breaking spikes	< 50 mV <sub>SS</sub> @ 24 V DC, I <sub>N</sub>

### General data

AC failure bridging time @ I <sub>Nom</sub>	> 20 ms @ 230 V AC / > 20 ms @ 115 V AC	Current limiting	> 120 % I <sub>N</sub>
Degree of efficiency	91 % @ 230 V AC / 88 % @ 115 V AC	Housing version	Metal, corrosion resistant
Indication	Operation, green LED	MTBF	> 500,000 h acc. to IEC 1709 (SN29500)
Mounting position, installation notice	Horizontal on TS35 mounting rail, with 50 mm of clearance at top and bottom for air circulation. Can be mounted side by side with no space in between.	Operating temperature	-25 °C...+70 °C
Power factor (approx.)	> 0.94 @ 230 V AC / > 0.99 @ 115 V AC	Protection against over-heating	Yes
Protection against reverse voltages from the load	30...35 V DC	Short-circuit protection	Yes
Weight	1.05 kg		

## CP M SNT 180W 24V 7,5A

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### EMC / shock / vibration

Limiting of mains voltage harmonic currents	in accordance with EN 61000-3-2	Noise emission acc. to EN55022	Class B
Interference immunity test acc. to	EN 61000-4-2 (ESD)  EN 61000-4-3 and EN 61000-4-8 (fields)  EN 61000-4-4 (burst)  EN 61000-4-5 (surge)  EN 61000-4-6 (conducted)  EN 61000-4-11 (dips)	Shock resistance IEC 60068-2-27	30 g in all directions

### Insulation coordination

Class of protection	I, with PE connection	Insulation voltage	3 kV input/output; 2 kV input/earth; 0.5 kV output/earth
Pollution severity	2	electrical isolation, input-earth	2 kV
electrical isolation, input-output	3 kV	electrical isolation, output-earth	0.5 kV

### Electrical safety (applied standards)

Electrical machine equipment	Acc. to EN60204	For use with electronic equipment	Acc. to EN50178 / VDE0160
Protection against dangerous shock currents	Acc. to VDE0106-101	Protective separation protection against electrical shock	VDE0100-410 / acc. to DIN57100-410
Safety extra-low voltage	SELV acc. to EN60950, PELV acc. to EN60204	Safety transformers for switch-mode power supplies	Acc. to EN 61558-2-17

### Connection data (input)

Conductor cross-section, AWGcmil , max.	12	Conductor cross-section, AWGcmil , min.	26
Conductor cross-section, flexible , min.	0.5 mm <sup>2</sup>	Conductor cross-section, rigid , max.	6 mm <sup>2</sup>
Conductor cross-section, rigid , min.	0.5 mm <sup>2</sup>	Number of terminals [Input]	3 for L/N/PE
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Wire connection cross section, flexible (input), max.	2.5 mm <sup>2</sup>		

### Connection data (output)

Conductor cross-section, AWGcmil , max.	12	Conductor cross-section, AWGcmil , min.	26
Conductor cross-section, flexible , max.	2.5 mm <sup>2</sup>	Conductor cross-section, flexible , min.	0.5 mm <sup>2</sup>
Conductor cross-section, rigid , max.	6 mm <sup>2</sup>	Conductor cross-section, rigid , min.	0.5 mm <sup>2</sup>
Number of terminals [Output]	5 (++) / (-)	Tightening torque, max.	0.6 Nm
Tightening torque, min.	0.5 Nm		

**Data sheet**

**CP M SNT 180W 24V 7,5A**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Approvals**

Institute (GERMLLOYD)		Certificate No. (GERMLLOYD)	94767-10
Institute (cULus)		Certificate no. (cULus)	E258476VOL1SEC24
Institute (cURus)		Certificate No. (cURus)	E25565 1VOLX3A21

**Classifications**

ETIM 3.0	EC001039	eClass 5.1	27-04-90-02
eClass 6.2	27-04-90-04	eClass 7.1	27-04-90-04

**Product information**

Descriptive text ordering data	The internal varistor found in a switch-mode power supply does not replace the necessary surge protection in a system.
Descriptive text technical data	*) Recommendation applies only to AC operation; the max. permissible operating voltage is to be observed in all cases!

**Approvals**

Approvals






ROHS	Conform
------	---------

**Downloads**

Package insert	<a href="#">Operating instructions</a>
Declaration of Conformity	<a href="#">K469_12_11.pdf</a>
PDF	<a href="#">Warranty information</a>
EPLAN	<a href="#">8951350000.ema</a>
<a href="#">3-D model</a>	


**Data sheet**

**CP M SNT 180W 24V 7,5A**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

**Electric symbol**

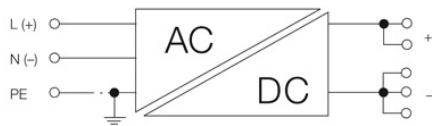

With DC connection, note polarity