


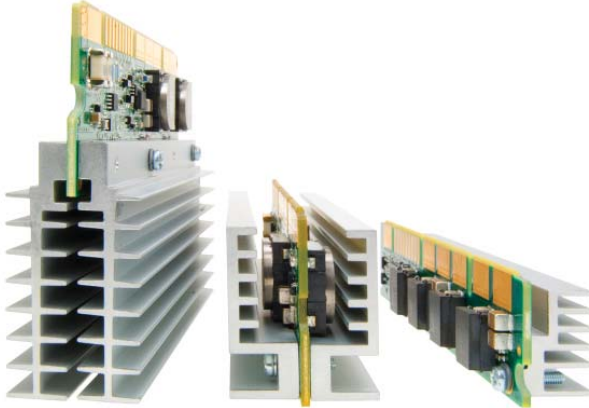

DESCRIPTION

The VR110 Series is designed to meet the fast load transients required by Intel® Xeon® processors and is fully compliant with the latest Intel® VRM 11.0 specifications. High efficiency of 84% at full load for reduced power dissipation simplifies system thermal management. Available in 2U, 1.5U, 1U and new 0.66U form factors, the VR110 Series is ideal for use in a wide variety of server applications.

FEATURES

- Intel® VRM 11.0 compliant
- 4 height options 2.5", 1.86", 1.18" and 0.78" (63.5mm, 47.2mm, 29.9mm and 19.9mm)
- DAC programmable output voltage
- Power good output signal
- Differential remote sense
- Remote enable
- Supervisory functions
 - Output overcurrent
 - Short circuit protection
 - Overtemperature indicator
 - Output current level indicator
- Tri-state output when disabled
- Dynamic VID capability
- EN/IEC60950-1 Safety Approval (CB Report)



SELECTION GUIDE - STANDARD LOAD LINE

Model	Input Voltage Range (V)	Output Voltage Range (V)	Peak Current (A)	Device Height	Application Height
VR110B150CS-1C	11.04 – 12.60	0.81875 – 1.60	150	2.5" (63.5mm)	2U
VR110B150CL-1C				1.86" (47.2mm)	1.5U
VR110B150CU-1C				1.18" (29.9mm)	1U
VR110B150CU-3C ①		0.8375 – 1.60	1.18" (29.9mm)	1U	
VR110B080CU-1C		0.81875 – 1.60	80	1.18" (29.9mm)	1U
VR110B080CA-1C	0.78" (19.9mm)			<1U	

INPUT CHARACTERISTICS - ALL MODELS

Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Input voltage operating range		11.04	12.0	12.60	V
Under voltage lockout VR110B080CA-1C only	Turn-on threshold		9.5		V
	Turn-off threshold		8.2		
	Hysteresis voltage		1.4		
Under voltage lockout All other models	Turn-on threshold		5.8		V
	Turn-off threshold		5.0		
	Hysteresis voltage		0.85		
Maximum input current	Typical: 130A, 1.325VID		15.3		A
	Max: 150A, 1.6VID			22.4	
No-load input current	Enable state, no load		300		mA
Recommended input capacitance	Nichicon RHT1C331MDN1		2		each
Disabled input current	Disabled state		40		mA
Enable - positive logic	On state range	0.9		5.0	V
	Off state range	-0.3		0.4	

OUTPUT CHARACTERISTICS - 150A Models

Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Output voltage range	7-Bit DAC controlled	0.81875		1.6	V
Line regulation		-2	0	2	mV
Load Line ③		1.22	1.25	1.28	mΩ
Ripple & noise ④	20MHz bandwidth		6.4		mVp-p
Output current range	Continuous (TDC)	0		130	A
	Peak, <10 mS	0		150	
Efficiency for 11.0 TDC	IO = 130A, VID = 1.325	83	84		%
Turn-on time	VIN present: enable to 90% VOUT		4	10	mS
Transient response ⑤	100A step, 100A/μS, ΔVo, Adj	120	125	130	mV
Remote sense ⑥	Compensation range			300	mV
Recommended ceramic ⑦	Murata GRM Series or equivalent	46	50		each
Recommended bulk output	UCC 4PS560MH11 or equivalent	10	17		

OUTPUT CHARACTERISTICS - 80A Models

Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Output voltage range	7-Bit DAC controlled	0.81875		1.6	V
Line regulation	VR110B080CU-1C VR110B080CA-1C	-2	0	2	mV
		-4	0	3	
Load Line ③		1.22	1.25	1.28	mΩ
Ripple & noise ④	20MHz bandwidth		6.4		mVp-p
Output current range	Continuous (TDC)	0		70	A
	Peak, <10 mS	0		80	
Efficiency for 11.0 TDC	IO = 70A, VID = 1.325	85	87		%
	IO = 70A, VID = 1.325	86	88		
Turn-on time	VIN present: enable to 90% VOUT		4	10	mS
Transient response ⑤	40A step, 100A/μS, ΔVo, Adj	45	50	55	mV
Remote sense ⑥	Compensation range			300	mV
Recommended ceramic ⑦	Murata GRM Series or equivalent	46	50		Each
Recommended bulk output	UCC 4PS560MH11 or equivalent	10	17		

GENERAL CHARACTERISTICS					
Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Operating temperature range		0		65	°C
Storage temperature range	Non-condensing	-40		85	
MTBF 150A models 80A models	Calculated (RAC PRISM) 45°C			1.097 1.118	x10 ⁶ Hrs
Switching frequency	Per phase		300		KHz
Material flammability		UL 94V-0			
Safety Agency Approval	IEC/EN60950-1	VDE REG.-Nr. C663/CB Certificate #DE1-39070			

MECHANICAL CHARACTERISTICS				
Parameter	Form Factor	Part Number	US (L x W x H)	Metric (L x W x H)
Dimensions	2U	VR110B150CS-1C	3.8" x 0.870" x 2.5"	96.52mm x 22.10mm x 63.50mm
	1.5U	VR110B150CL-1C	3.8" x 1.0" x 1.86"	96.52mm x 24.50mm x 47.24mm
	1U	VR110B150CU-1C	3.8" x 0.870" x 1.18"	96.52mm x 22.10mm x 29.97mm
	1U	VR110B150CU-3C	3.8" x 0.870" x 1.18"	96.52mm x 22.10mm x 29.97mm
	1U	VR110B080CU-1C	3.8" x 0.475" x 1.18"	96.52mm x 12.07mm x 29.97mm
	0.66U	VR110B080CA-1C	3.675" x 0.75" x 0.782"	93.35mm x 19.05mm x 19.86mm
Parameter	Form Factor	Part Number	US (oz)	Metric (g)
Weight	2U	VR110B150CS-1C	3.53	100
	1.5U	VR110B150CL-1C	3.0	85
	1U	VR110B150CU-1C	3.0	85
	1U	VR110B150CU-3C	3.0	85
	1U	VR110B080CU-1C	1.06	30
	0.66U	VR110B080CA-1C	1.6	45.36

PROTECTION CHARACTERISTICS – 150A Models					
Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Output overcurrent shutdown	Latching	160		190	A
Overvoltage shutdown	Latching, above VID	100	150	200	mV
Overtemperature indicator	Non-latching, at hot spots		125		°C
	Worst case junction temperature				
Load indicator 150A	VID = 1.325	0A load	0.0	0.22	V
		75A load	0.9	1.2	
		150A load	1.7	2.4	






PROTECTION CHARACTERISTICS – VR110B080CU-1C (80A, 1U, No heatsink)					
Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Output overcurrent shutdown	Latching	83		115	A
Overvoltage shutdown	Latching, above VID	100	150	200	mV
Overtemperature indicator	Non-latching, at hot spots		125		°C
	Worst case junction temperature				
Load indicator 80A	VID = 1.325	0A load	0.0	0.22	V
		40A load	0.9	1.2	
		80A load	1.7	2.4	

PROTECTION CHARACTERISTICS – VR110B080CA-1C (80A, 0.66U)					
Parameter	Conditions ②	MIN.	TYP.	MAX.	Units
Output overcurrent shutdown	Non-latching	90		115	A
Overvoltage shutdown	Non-latching, above VID	150	175	200	mV
Overtemperature indicator	Non-latching, at hot spots		125		°C
	Worst case junction temperature				
Load indicator 80A	VID = 1.325	0A load	0.02	0.17	V
		40A load	0.55	0.75	
		80A load	1.1	1.5	

NOTES




- ① Backward compatible to VR102B150CU-3C.
- ② $V_{IN} = 12V_{dc}$, $T_A = 25^\circ C$, Airflow = 400LFM unless otherwise noted.
- ③ The output impedance is 1.25mΩ.
- ④ Output ripple voltage is specified when measured with Intel® specified capacitance at the output of the converter.
- ⑤ Transient response is specified with Intel® specified capacitors at the output of the converter.
- ⑥ If remote sense is not required or used, the Sense(+) and Sense(-) pins must be connected to Vo(+) and Vo(-) respectively.
- ⑦ 10μF ceramic X5R or X6S.

Typical Performance Curves - Derating
($V_{IN} = 12V$; $V_{ID} = 1.325V$)

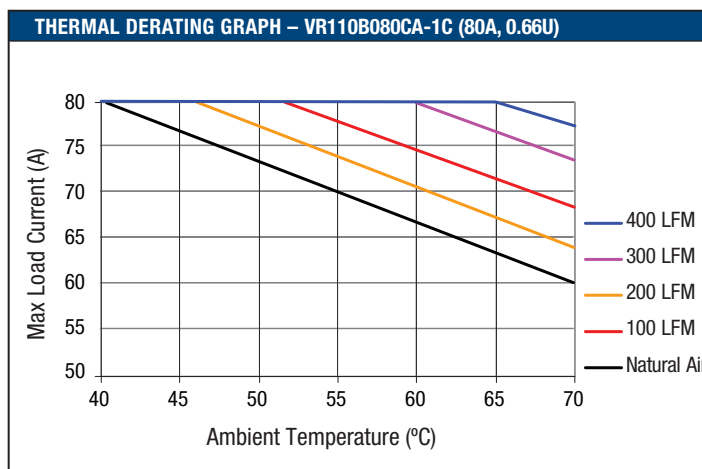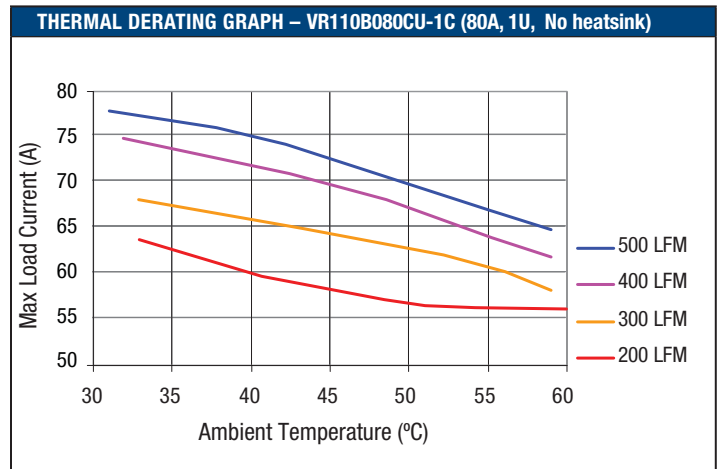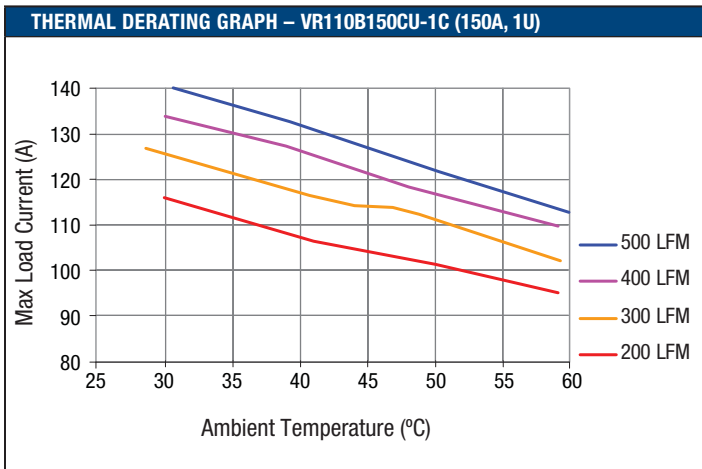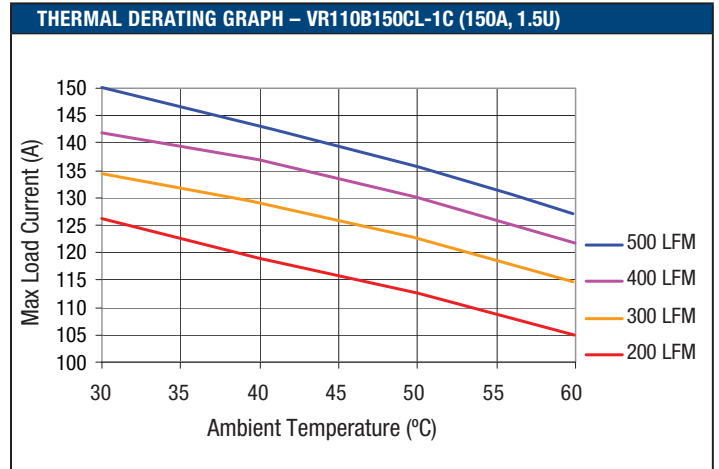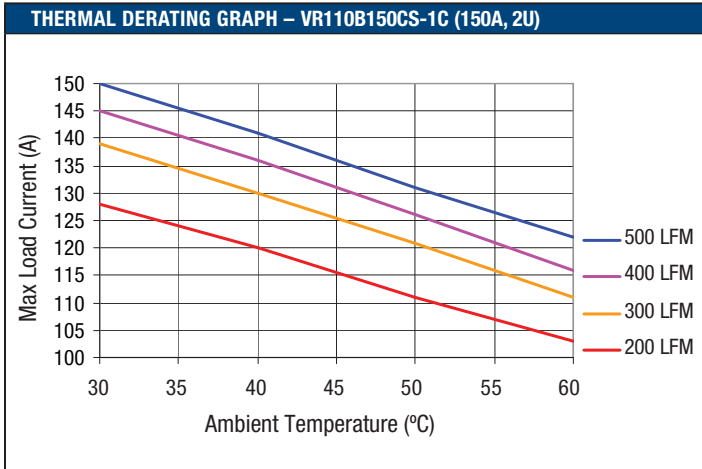


Typical Performance Curves - Efficiency

($V_{IN} = 12V$; $V_{ID} = 1.325V$; $T_{AMB} = 25^{\circ}C$ with 400 LFM airflow)

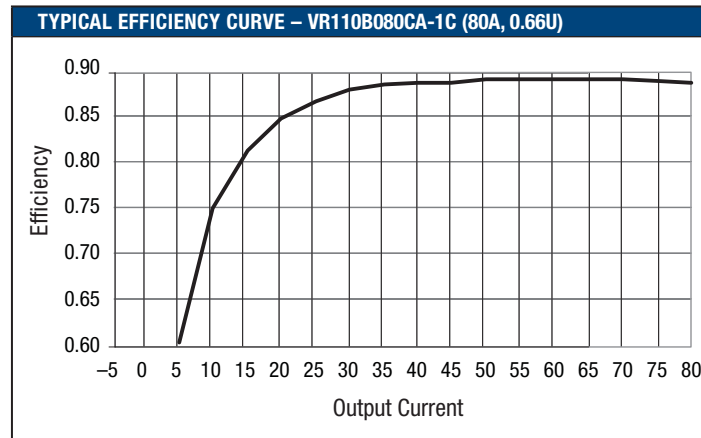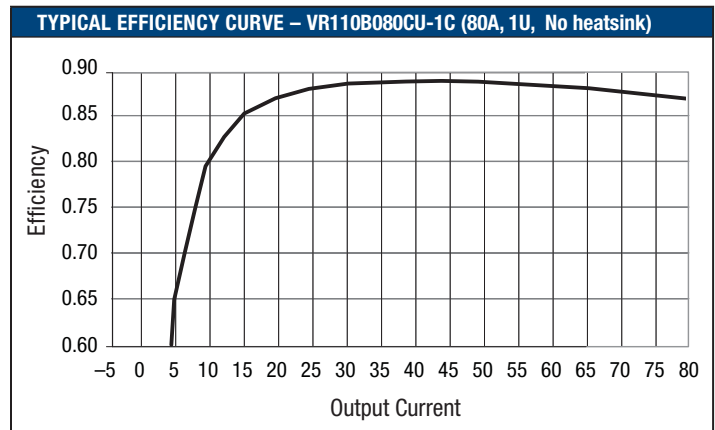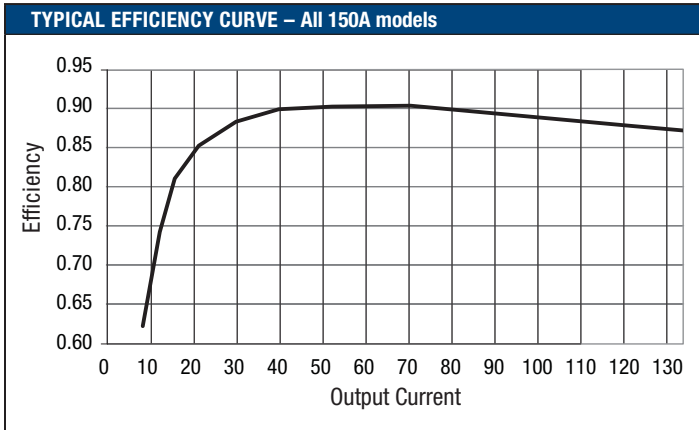

PART NUMBER CODING

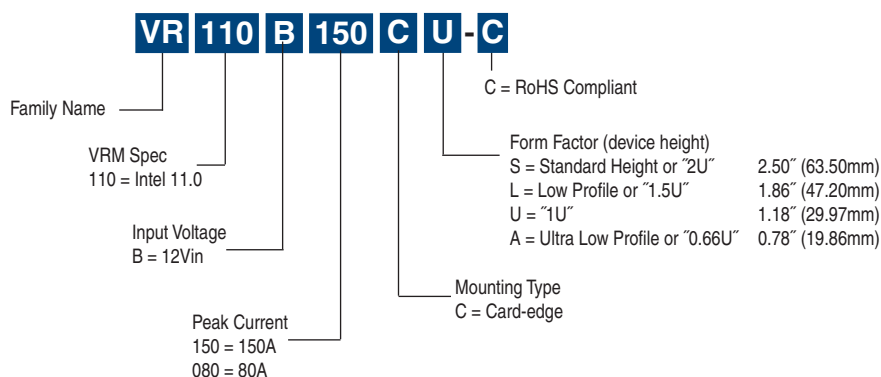

PACKAGE SPECIFICATIONS

PIN ASSIGNMENT - ALL VR110 MODELS (EXCEPT "-3C" VERSION)

Pin	Signal	Pin	Signal
1	VSS	54	V _{IN+}
2	VSS	53	V _{IN+}
3	VSS	52	V _{IN+}
4	VID4	51	VID3
5	VID2	50	VID1
6	VID0	49	VID5
7	VO_SEN+	48	VO_SEN-
8	PWRGD	47	VR_HOT
9	OUTEN	46 [†]	LL0
10	LOAD CURRENT	45 [†]	LL1
11	VID6	44	VID_SELECT
12*	VRM_PRESENSE	43*	VRM_ID
13	VO+	42	VO+
14	VO+	41	VO+
15	VO+	40	VO+
16	VSS	39	VSS
17	VSS	38	VSS
18	VSS	37	VSS
19	VO+	36	VO+
20	VO+	35	VO+
21	VO+	34	VO+
22	VSS	33	VSS
23	VSS	32	VSS
24	VSS	31	VSS
25	VO+	30	VO+
26	VO+	29	VO+
27	VO+	28	VO+

* VRM_PRESENSE and VRM_ID are connected to V_{SS} on the VRM through a 100Ω resistor.

[†] LL0, LL1 gives 1.25mΩ load line only.

PACKAGE SPECIFICATIONS, CONTINUED: “-3C” VERSION ONLY

PIN ASSIGNMENT - “-3C” VERSION ONLY			
Pin	Signal	Pin	Signal
1	VSS	54	V _{IN+}
2	VSS	53	V _{IN+}
3	VSS	52	V _{IN+}
4	VID4	51	VID3
5	VID2	50	VID1
6	VID0	49	VID5
7	VO_SEN+	48	VO_SEN-
8	PWRGD	47	VR_HOT
9	OUTEN	46†	LLO
10	LOAD CURRENT	45†	LL1
11	N/C	44	N/C
12*	VRM_PRESENCE	43*	VRM_ID
13	VO+	42	VO+
14	VO+	41	VO+
15	VO+	40	VO+
16	VSS	39	VSS
17	VSS	38	VSS
18	VSS	37	VSS
19	VO+	36	VO+
20	VO+	35	VO+
21	VO+	34	VO+
22	VSS	33	VSS
23	VSS	32	VSS
24	VSS	31	VSS
25	VO+	30	VO+
26	VO+	29	VO+
27	VO+	28	VO+

MECHANICAL DIMENSIONS – ALL MODELS

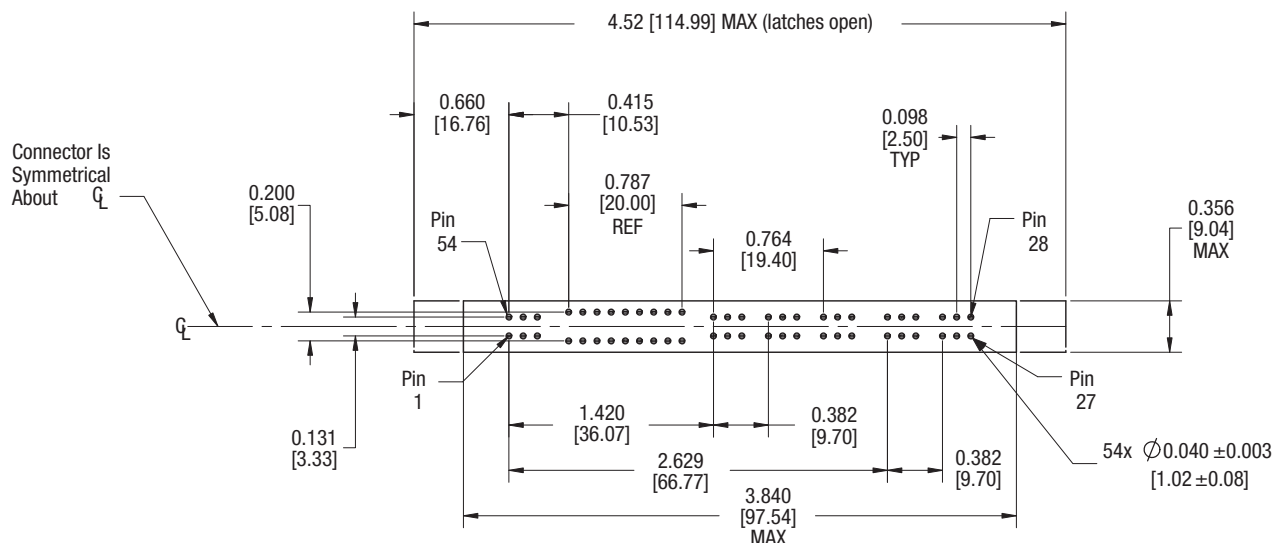


Figure 1. Connector Footprint (Thru-Hole Connector) Viewed From VRM (Top) Side

Recommended Mating Connectors

Tyco 1651826-1 (Vertical, 0.18" Solder Tail, Long)
 1651929-1 (Vertical, 0.12" Solder Tail, Short)
 1766336-1 (Vertical, Surface Mount)
 1766436-1 (Vertical, Compliant Pin)


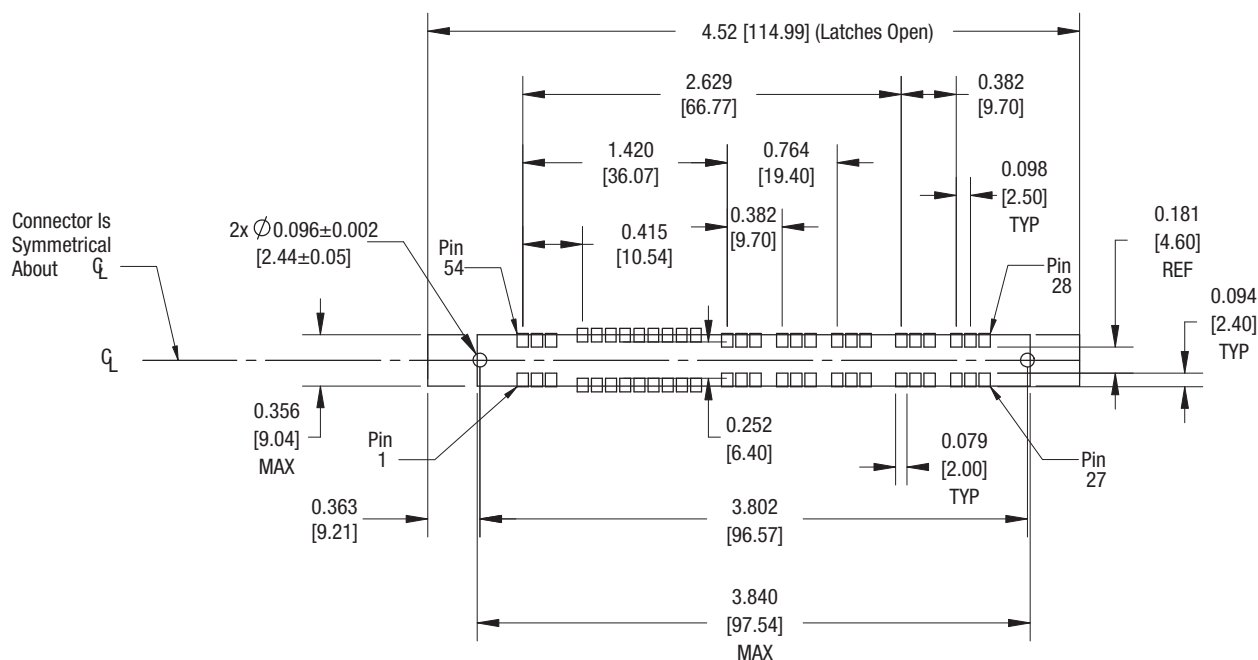


Figure 2. Connector Footprint (Surface Mount Connector) Viewed From VRM (Top) Side

Dimensions are in inches [mm]

Tolerances (Unless otherwise Specified)
 X.XX ±.02 (±0.5mm)
 X.XXX ±.010 (±0.25mm)



MECHANICAL DIMENSIONS

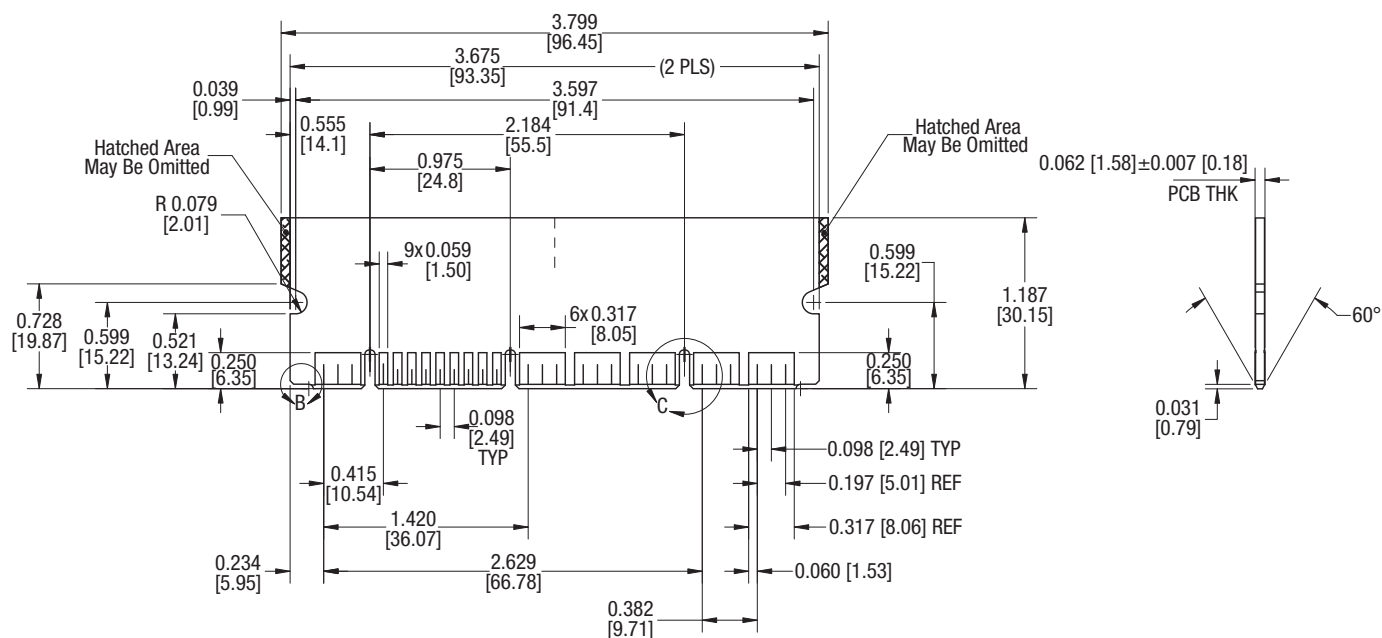


Figure 3. Circuit Board Outline

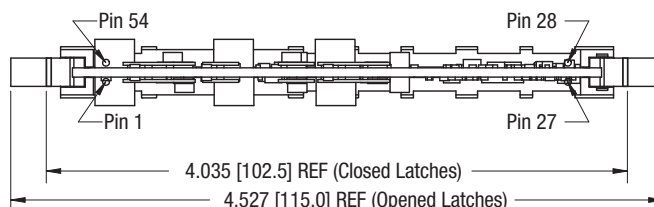



Figure 4. Top View (shown without heat sinks)

Dimensions are in inches [mm]

Tolerances (Unless otherwise Specified)

X.XX ±.02 (±0.5mm)

X.XX	±.02 (±0.5mm)
X.XXX	±.010 (±0.25mm)



MECHANICAL DIMENSIONS

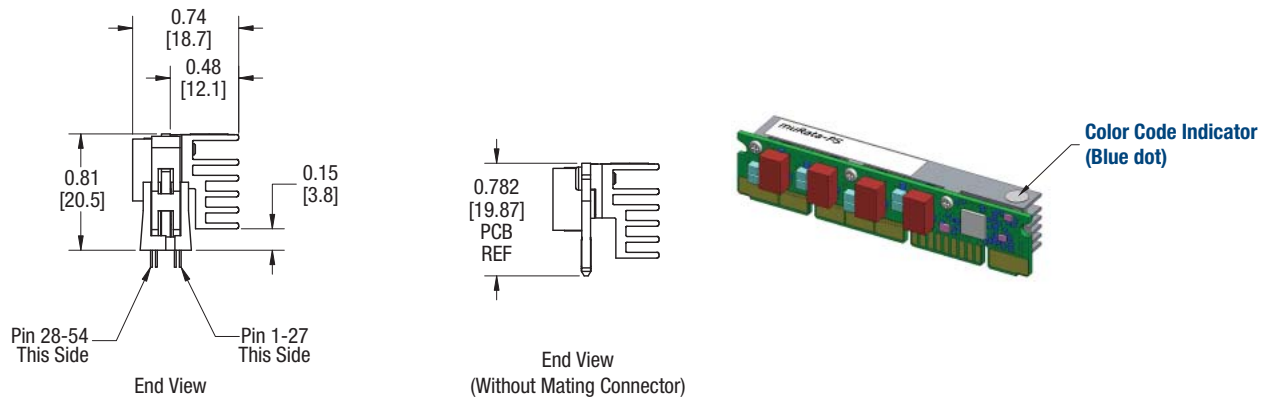


Figure 5. VR110B080CA-1C (80A, 0.66U)

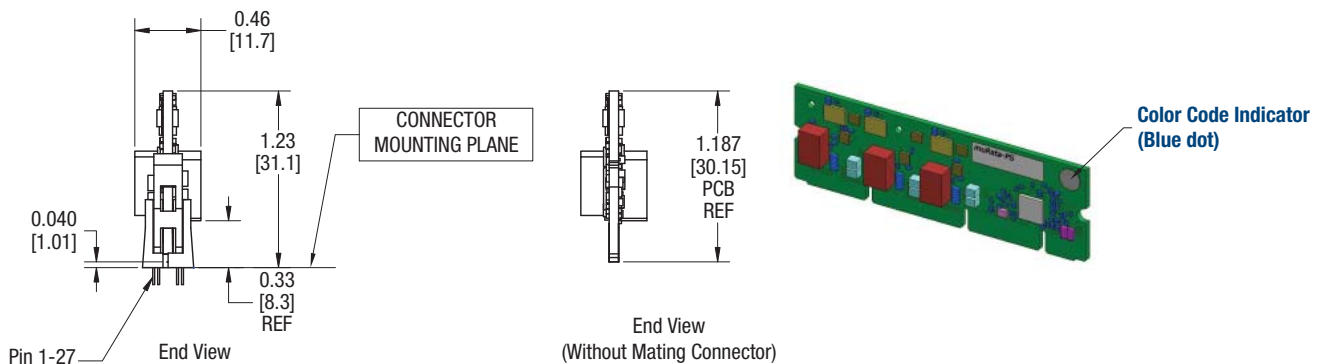


Figure 6. VR110B080CU-1C (80A, 1U)


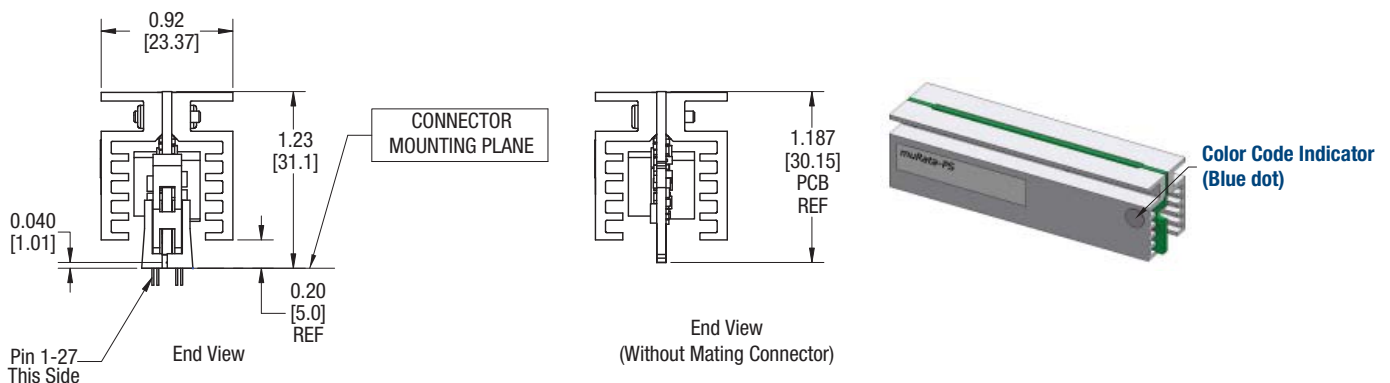


Figure 7. VR110B150CU-1C (150A, 1U)

Dimensions are in inches [mm]

Tolerances (Unless otherwise Specified)
X.XX ±.02 (±0.5mm)
X.XXX ±.010 (±0.25mm)



MECHANICAL DIMENSIONS

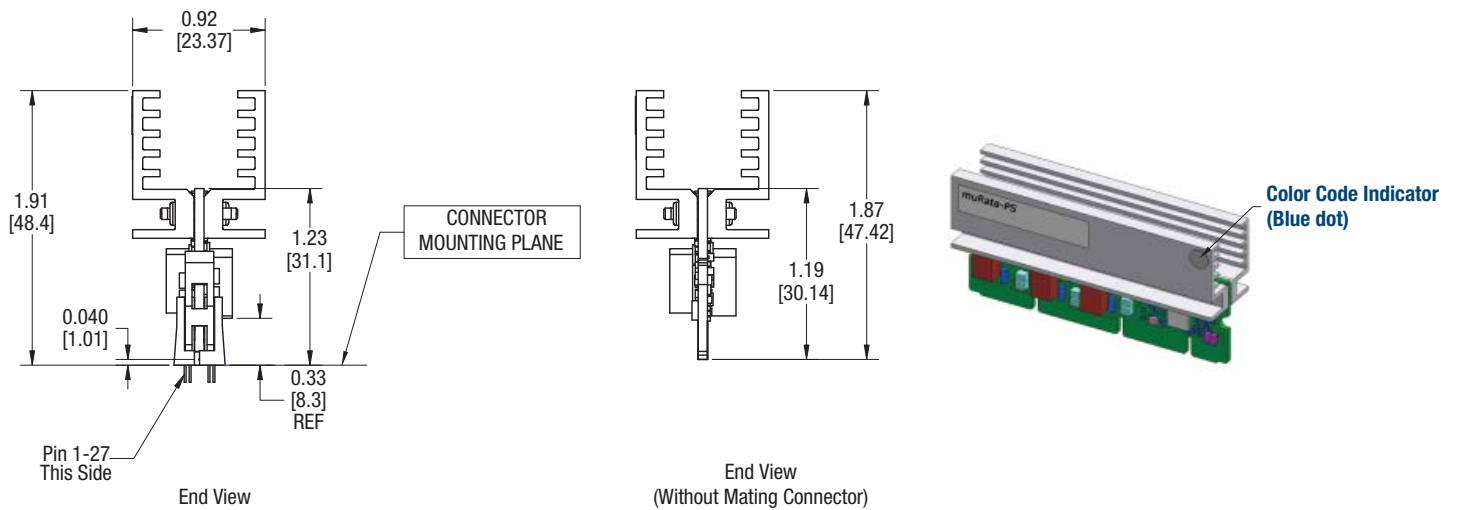


Figure 8. VR110B150CL-1C (150A, 1.5U)


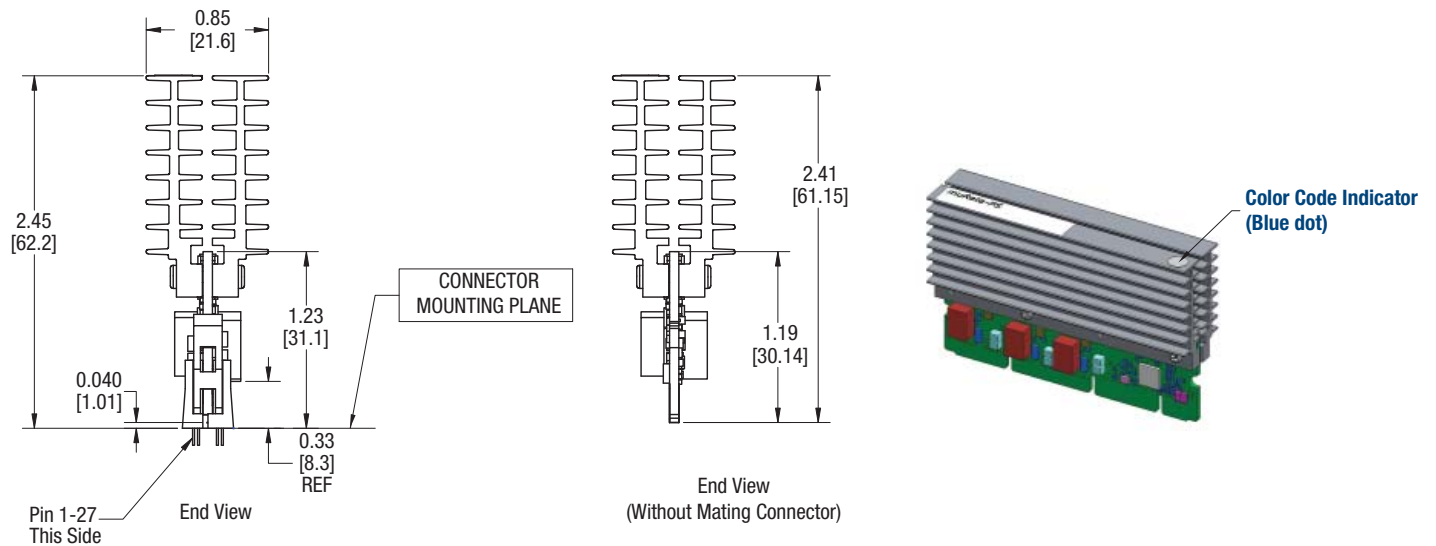


Figure 9. VR110B150CS-1C (150A, 2U)

Dimensions are in inches [mm]

Tolerances (Unless otherwise Specified)
X.XX ±.02 (±0.5mm)
X.XXX ±.010 (±0.25mm)



RoHS COMPLIANCY

The following parts are in compliance with the European Union Directive 2002/95/EC (RoHS) with respect to the following substances: lead (Pb), cadmium (Cd), mercury (Hg), hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

VR110B150CS-1C
VR110B150CL-1C
VR110B150CU-1C
VR110B080CU-1C
VR110B080CA-1C

RoHS PROCESS NOTE

These products are not intended to go through a reflow solder process. See recommended interface options.

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#):
Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.
© 2013 Murata Power Solutions, Inc.