

NCS2003, NCV2003

Low Voltage, Rail-to-Rail Output Operational Amplifier

The NCS2003/NCV2003 is a low voltage operational amplifier with rail-to-rail output drive capability. The 1.8 V operation allows high performance operation in low voltage, low power applications.

Additional features include no output phase reversal with overdriven inputs, a low input offset voltage of 0.5 mV, ultra low input bias current of 1 pA, and a unity gain bandwidth of 5 MHz at 1.8 V. The tiny NCS2003 is the ideal solution for small portable electronic applications and is available in the space saving SOT23-5 and SOT-553 packages. The NCV2003 is available in SOT23-5 and is AEC-Q100 Qualified and PPAP Capable.

Features

- 7 MHz Unity Gain Bandwidth at 5 V
- 5 MHz Unity Gain Bandwidth at 1.8 V
- Rail-to-Rail Output
- No Output Phase Reversal for Over-Driven Input Signals
- Low Offset Voltage – 500 μ V typical
- Low Input Bias Current – 1 pA typical
- Space saving SOT23-5 and SOT553-5 Packages
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

Typical Applications

- Cellular Telephones
- Current Shunt Monitors for battery monitoring
- Pulse Oximetry Signal Conditioning
- Blood Pressure Monitor Conditioning and Filtering
- Hard Drive Sensor Buffer

This document contains information on some products that are still under development. ON Semiconductor reserves the right to change or discontinue these products without notice.



ON Semiconductor®

<http://onsemi.com>




SOT23-5
CASE 483-02
(NCS/NCV2003)



SOT553, 5 LEAD
CASE 463B
(NCS2003)



MARKING DIAGRAMS



AN3 = NCS/NCV2003SN2T1G
A3 = NCS2003XV53T2G
Y = Year
W = Work Week
M = Date Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

PIN CONNECTIONS



ORDERING INFORMATION

See detailed ordering and shipping information on page 8 of this data sheet.

NCS2003, NCV2003

ABSOLUTE MAXIMUM RATINGS

Over operating free-air temperature, unless otherwise stated

Parameter	Symbol	Limit	Unit
Supply Voltage ($V_{DD} - V_{SS}$)	V_S	7	V

INPUT AND OUTPUT PINS

Input Voltage (Note 1)	V_{IN}	$V_{SS} - 300 \text{ mV}$ to 7.0 V	V
Input Current	I_{IN}	10	mA
Output Short Circuit Current (Note 2)	I_{OSC}	100	mA

TEMPERATURE

Storage Temperature	T_{STG}	-65 to 150	°C
Junction Temperature	T_J	150	°C

ESD RATINGS

Human Body Model	HBM	2000	V
Machine Model	MM	200	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- Neither input should exceed the range of $V_{SS} - 300 \text{ mV}$ to 7.0 V
- Indefinite duration; however, maximum package power dissipation limits must be observed to ensure that the maximum junction temperature is not exceeded.

THERMAL INFORMATION (Note 3)

Thermal Metric	Symbol	Limit	Unit
Junction to Ambient – SOT23-5	θ_{JA}	235	°C/W
Junction to Ambient – SOT553-5	θ_{JA}	250	°C/W

- As mounted on an 80 x 80 x 1.5 mm FR4 PCB with 650 mm² and 2 oz (0.034 mm) thick copper heat spreader. Following JEDEC JESD/EIA 51.1, 51.2, 51.3 test guidelines.

OPERATING CONDITIONS

Parameter	Symbol	Limit	Unit
Operating Supply Voltage	V_S	1.7 to 5.5	V
Specified Operating Range	NCS2003 NCV2003 T_A	-40 to +85 -40 to +125	°C

NCS2003, NCV2003

ELECTRICAL CHARACTERISTICS: $V_S = +1.8\text{ V}$

At $T_A = +25^\circ\text{C}$, $R_L = 10\text{ k}\Omega$ connected to midsupply, $V_{CM} = V_{OUT} = \text{midsupply}$, unless otherwise noted. **Boldface** limits apply over the specified temperature range, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ (NCS2003), $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ (NCV2003). Guaranteed by design and/or characterization.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
-----------	--------	------------	-----	-----	-----	------

INPUT CHARACTERISTICS

Offset Voltage	V_{OS}			0.5	4.0	mV
					5.0	
Offset Voltage Drift	$\Delta V/\Delta T$			2.0		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	I_{IB}			1		pA
Input Offset Current	I_{OS}			1		pA
Differential Input Resistance	R_{IN}			>1		$\text{T}\Omega$
Differential Input Capacitance	C_{IN}			1.2		pF
Input Common Mode Range	V_{ICR}	Inferred from CMRR	V_{SS}		$V_{DD} - 0.6$	V
Common Mode Rejection Ratio	CMRR	$V_{IN} = 0\text{ V to }V_{DD} - 0.6\text{ V}$	70	80		dB
		$V_{IN} = 0.2\text{ V to }V_{DD} - 0.6\text{ V}$	65			

OUTPUT CHARACTERISTICS

Output Voltage High	V_{OH}	$V_{ID} = +0.5\text{ V, }R_L = 10\text{ k}\Omega$	1.75	1.798		V
			1.75			
		$V_{ID} = +0.5\text{ V, }R_L = 2\text{ k}\Omega$	1.7	1.78		
			1.7			
Output Voltage Low	V_{OL}	$V_{ID} = -0.5\text{ V, }R_L = 10\text{ k}\Omega$		7.0	50	mV
					50	
		$V_{ID} = -0.5\text{ V, }R_L = 2\text{ k}\Omega$		20	100	
					100	
Short Circuit Current	I_{SC}	$V_{ID} = +0.5\text{ V, }V_O = V_{SS}, \text{ Sourcing}$	5.0	8.0		mA
		$V_{ID} = -0.5\text{ V, }V_O = V_{DD}, \text{ Sinking}$	10	14		

NOISE PERFORMANCE

Voltage Noise Density	e_N	$f = 1\text{ kHz}$		20		$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	i_N	$f = 1\text{ kHz}$		0.1		$\text{pA}/\sqrt{\text{Hz}}$

DYNAMIC PERFORMANCE

Open Loop Voltage Gain	A_{VOL}	$R_L = 10\text{ k}\Omega$	80	92		dB
			75			
		$R_L = 2\text{ k}\Omega$		92		dB
			70			
Gain Bandwidth Product	GBWP			5		MHz
Gain Margin	A_M	$R_L = 10\text{ k}\Omega, C_L = 5\text{ pF}$		12		dB
Phase Margin	ψ_M	$R_L = 10\text{ k}\Omega, C_L = 5\text{ pF}$		53		$^\circ$
Slew Rate	SR	Positive Slope, $R_L = 2\text{ k}, A_V = +1$		6		$\text{V}/\mu\text{s}$
		Negative Slope, $R_L = 2\text{ k}, A_V = +1$		9		$\text{V}/\mu\text{s}$
Total Harmonic Distortion + Noise	THD+N	$V_O = 1\text{ Vpp, }R_L = 2\text{ k}\Omega, A_V = +1, 1\text{ kHz}$		0.015		%
		$V_O = 1\text{ Vpp, }R_L = 2\text{ k}\Omega, A_V = +1, 10\text{ kHz}$		0.025		%

POWER SUPPLY

Power Supply Rejection Ratio	PSRR		72	80		dB
			65			
Quiescent Current	I_{CC}	No Load		230	560	μA
					1	mA

NCS2003, NCV2003

ELECTRICAL CHARACTERISTICS: $V_S = +5.0\text{ V}$

At $T_A = +25^\circ\text{C}$, $R_L = 10\text{ k}\Omega$ connected to midsupply, $V_{CM} = V_{OUT} = \text{midsupply}$, unless otherwise noted. **Boldface** limits apply over the specified temperature range, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ (NCS2003), $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ (NCV2003). Guaranteed by design and/or characterization.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
-----------	--------	------------	-----	-----	-----	------

INPUT CHARACTERISTICS

Offset Voltage	V_{OS}			0.5	4.0	mV
					5.0	
Offset Voltage Drift	$\Delta V/\Delta T$			2.0		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	I_{IB}			1		pA
Input Offset Current	I_{OS}			1		pA
Differential Input Resistance	R_{IN}			>1		$\text{T}\Omega$
Differential Input Capacitance	C_{IN}			1.2		pF
Input Common Mode Range	V_{ICR}	Inferred from CMRR	V_{SS}		$V_{DD} - 0.6$	V
Common Mode Rejection Ratio	CMRR	$V_{IN} = 0\text{ V to }V_{DD} - 0.6\text{ V}$	65	70		dB
		$V_{IN} = 0.2\text{ V to }V_{DD} - 0.6\text{ V}$	63			

OUTPUT CHARACTERISTICS

Output Voltage High	V_{OH}	$V_{ID} = +0.5\text{ V, }R_L = 10\text{ k}\Omega$	4.95	4.99		V
			4.95			
		$V_{ID} = +0.5\text{ V, }R_L = 2\text{ k}\Omega$	4.9	4.97		
			4.9			
Output Voltage Low	V_{OL}	$V_{ID} = -0.5\text{ V, }R_L = 10\text{ k}\Omega$		8.0	50	mV
					50	
		$V_{ID} = -0.5\text{ V, }R_L = 2\text{ k}\Omega$		24	100	
					100	
Short Circuit Current	I_{SC}	$V_{ID} = +0.5\text{ V, }V_O = V_{SS}, \text{ Sourcing}$	40	76		mA
		$V_{ID} = -0.5\text{ V, }V_O = V_{DD}, \text{ Sinking}$	50	96		

NOISE PERFORMANCE

Voltage Noise Density	e_N	$f = 1\text{ kHz}$		20		$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	i_N	$f = 1\text{ kHz}$		0.2		$\text{pA}/\sqrt{\text{Hz}}$

DYNAMIC PERFORMANCE

Open Loop Voltage Gain	A_{VOL}	$R_L = 10\text{ k}\Omega$	86	92		dB
			78			
		$R_L = 2\text{ k}\Omega$	83	92		dB
			78			
Gain Bandwidth Product	GBWP			7.0		MHz
Total Harmonic Distortion + Noise	THD+N	$V_O = 4\text{Vpp, }R_L = 2\text{ k}\Omega, A_V = +1, 1\text{ kHz}$		0.005		%
		$V_O = 4\text{Vpp, }R_L = 2\text{ k}\Omega, A_V = +1, 10\text{ kHz}$		0.01		%
Gain Margin	A_M	$R_L = 10\text{ k}\Omega, C_L = 5\text{ pF}$		9		dB
Phase Margin	ψ_M	$R_L = 10\text{ k}\Omega, C_L = 5\text{ pF}$		64		$^\circ$
Slew Rate	SR	Positive Slope, $R_L = 2\text{ k}, A_V = +1$		7		$\text{V}/\mu\text{s}$
		Negative Slope, $R_L = 2\text{ k}, A_V = +1$		14		$\text{V}/\mu\text{s}$

POWER SUPPLY

Power Supply Rejection Ratio	PSRR		72	80		dB
			65			
Quiescent Current	I_{CC}	No Load		300	660	μA
					1	mA

TYPICAL CHARACTERISTICS

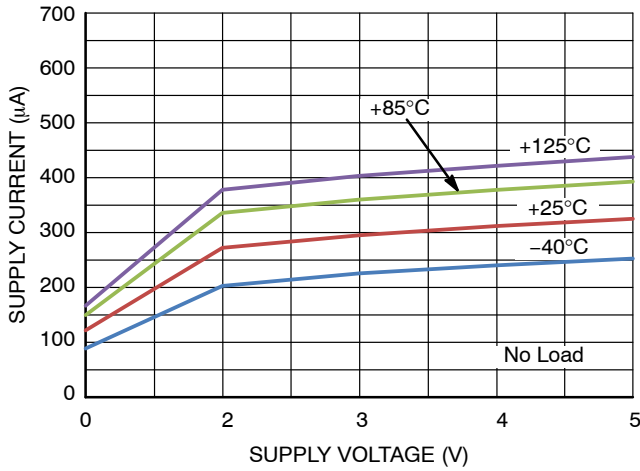


Figure 1. Quiescent Supply Current vs. Supply Voltage

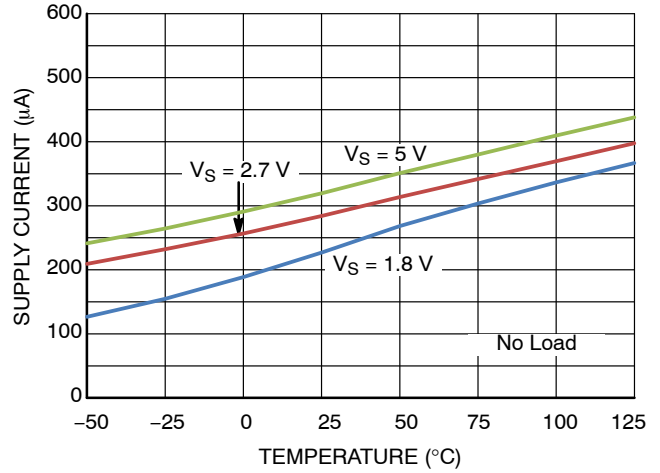


Figure 2. Quiescent Supply Current vs. Temperature

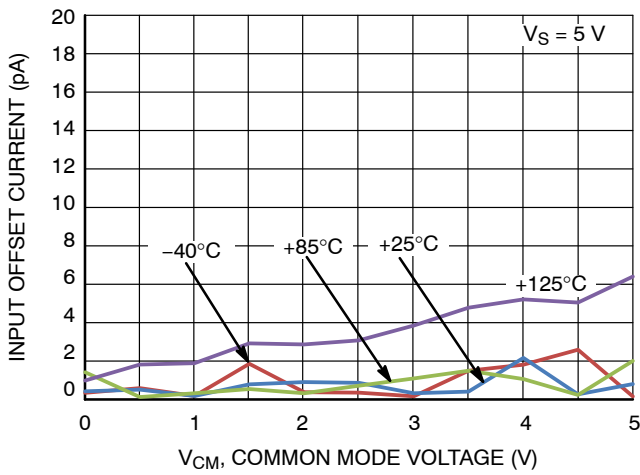


Figure 3. Input Offset Current vs. V_{CM}

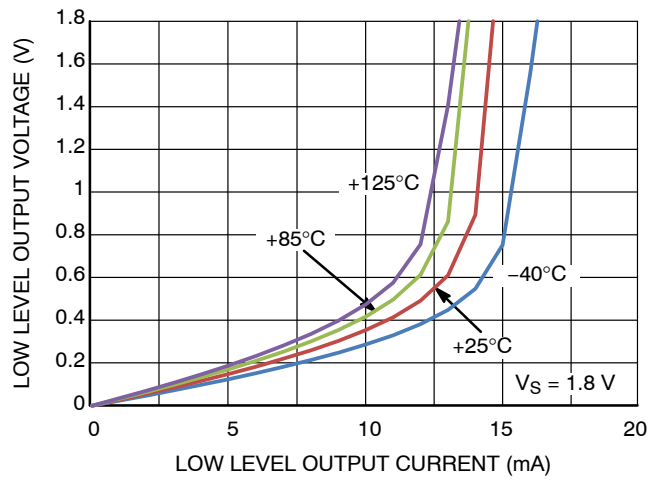


Figure 4. Low Level Output Voltage vs. Output Current @ $V_S = 1.8 V$

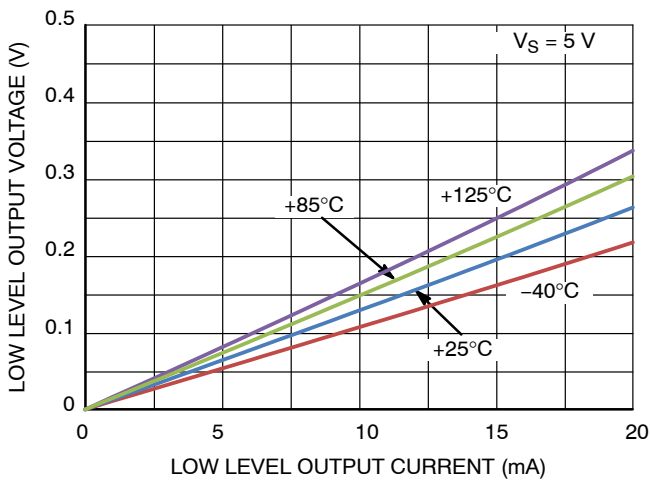


Figure 5. Low Level Output Voltage vs. Output Current @ $V_S = 5 V$

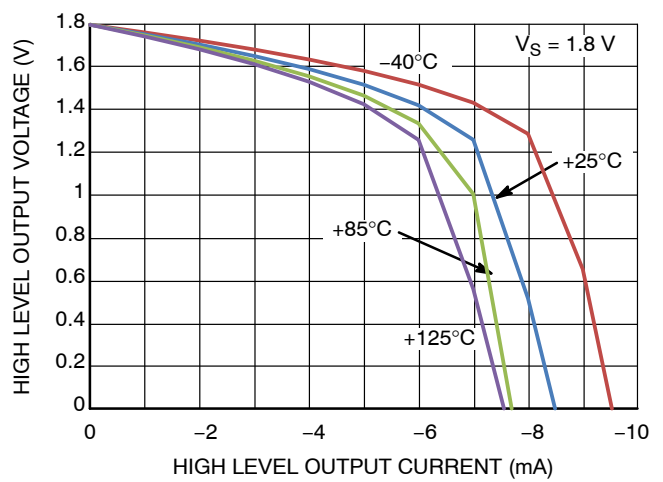


Figure 6. High Level Output Voltage vs. Output Current @ $V_S = 1.8 V$

TYPICAL CHARACTERISTICS

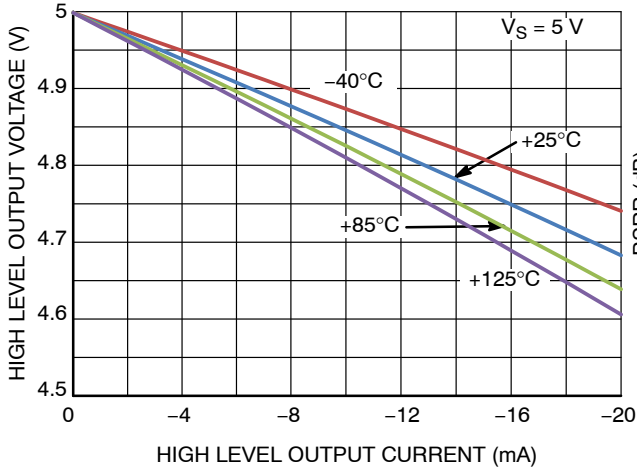


Figure 7. High Level Output Voltage vs. Output Current @ $V_S = 5\text{ V}$

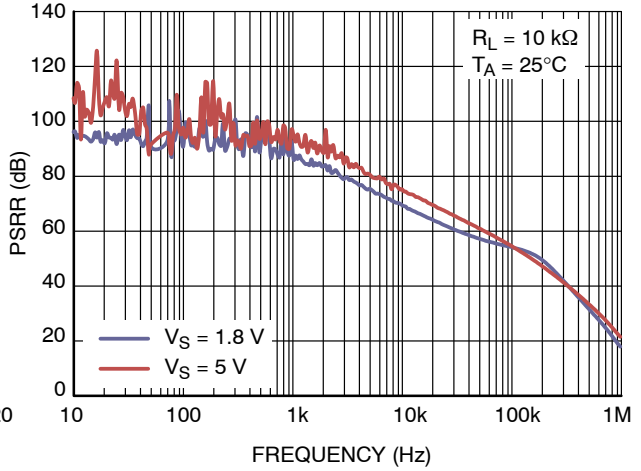


Figure 8. PSRR vs. Frequency

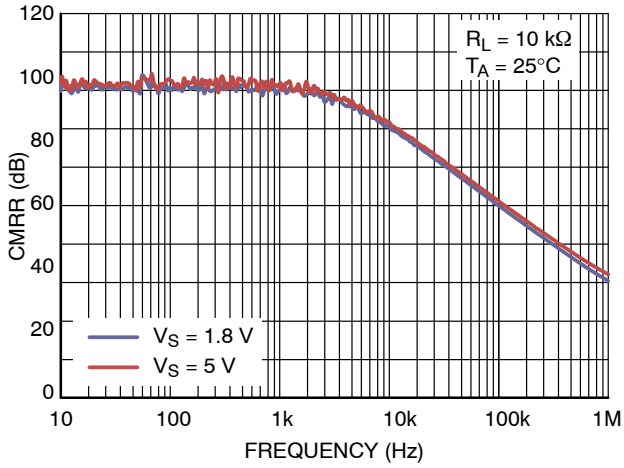


Figure 9. CMRR vs. Frequency

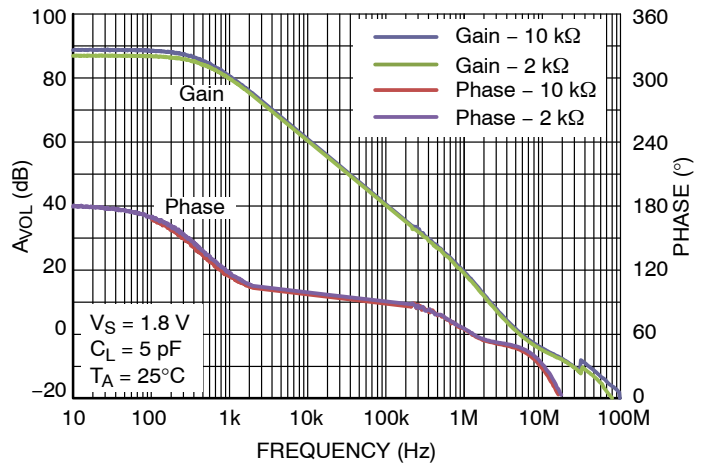


Figure 10. Open Loop Gain and Phase vs. Frequency @ $V_S = 1.8\text{ V}$

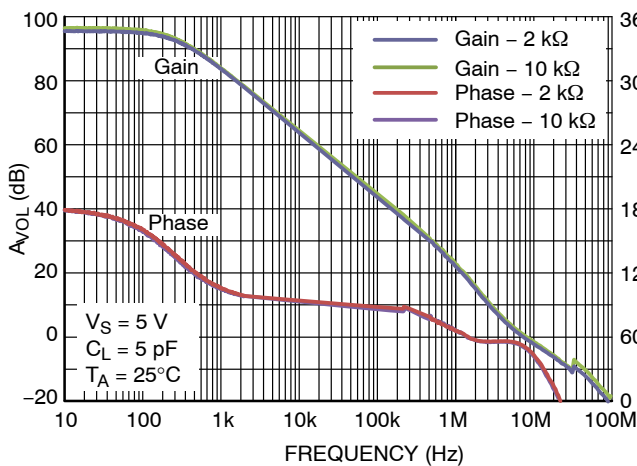


Figure 11. Open Loop Gain and Phase vs. Frequency @ $V_S = 5\text{ V}$

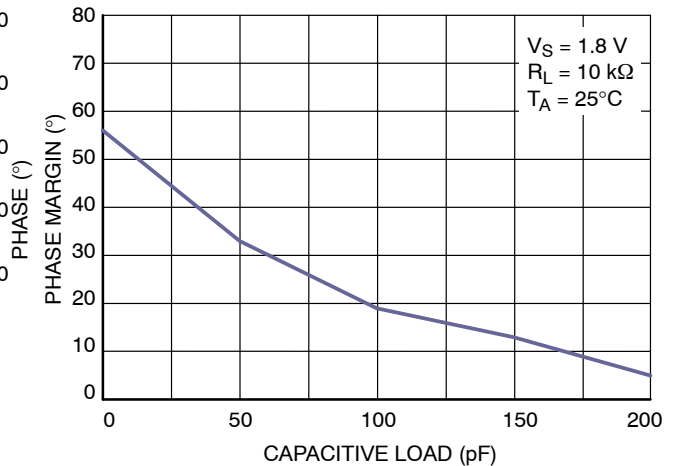


Figure 12. Phase Margin vs. Capacitive Load

TYPICAL CHARACTERISTICS

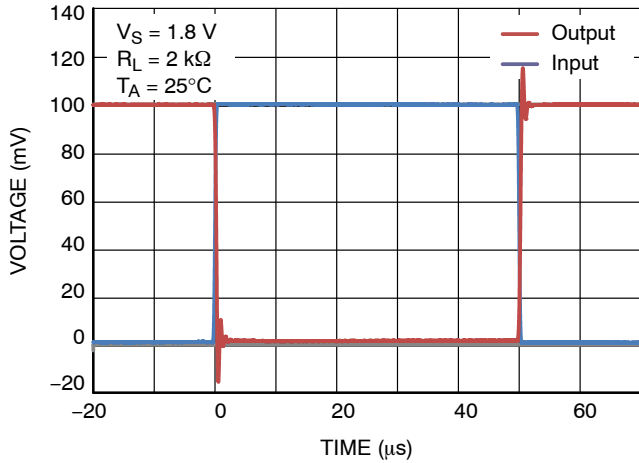


Figure 13. Inverting Small Signal Transient Response

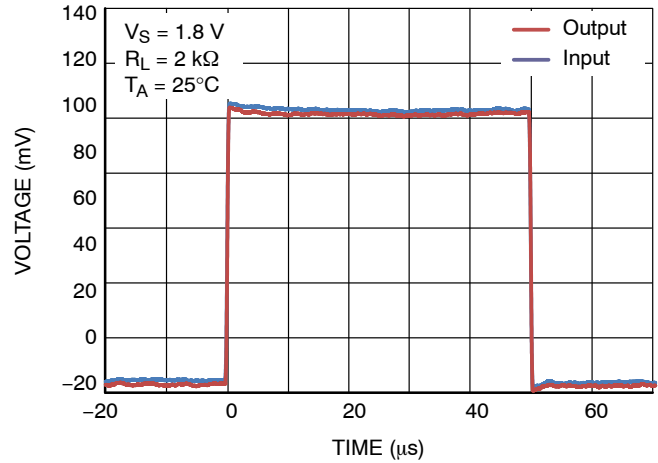


Figure 14. Non-Inverting Small Signal Transient Response

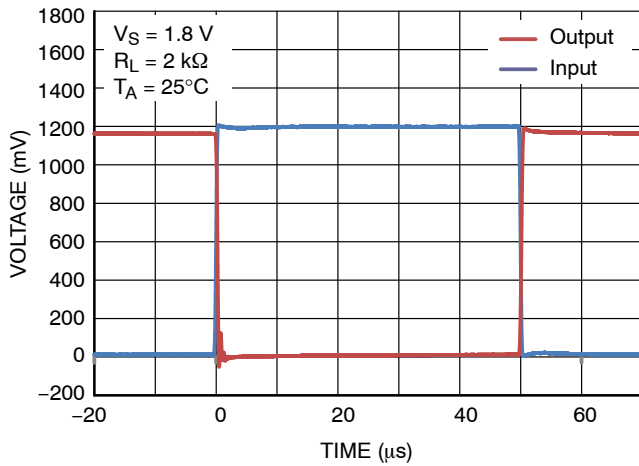


Figure 15. Inverting Large Signal Transient Response

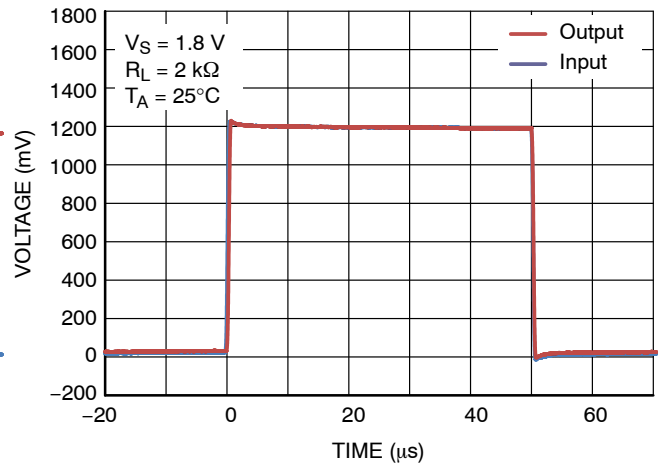


Figure 16. Non-Inverting Large Signal Transient Response

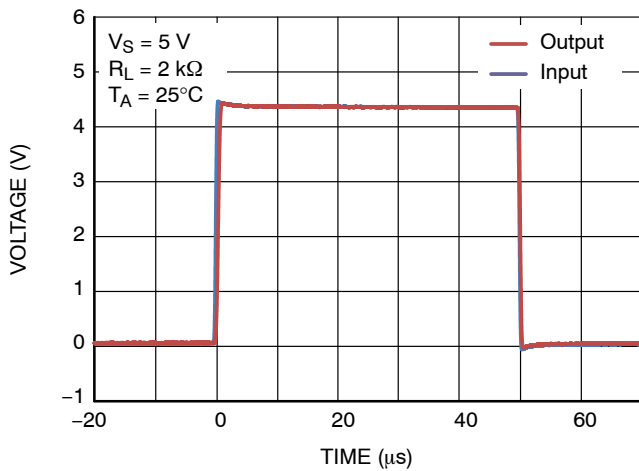


Figure 17. Non-Inverting Large Signal Transient Response

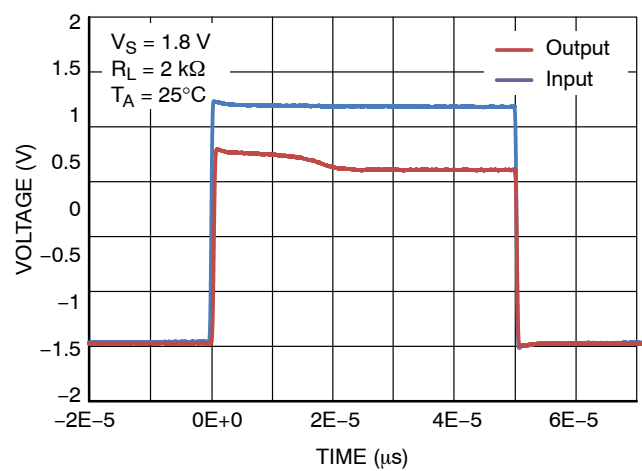


Figure 18. Output Overload Recovery

TYPICAL CHARACTERISTICS

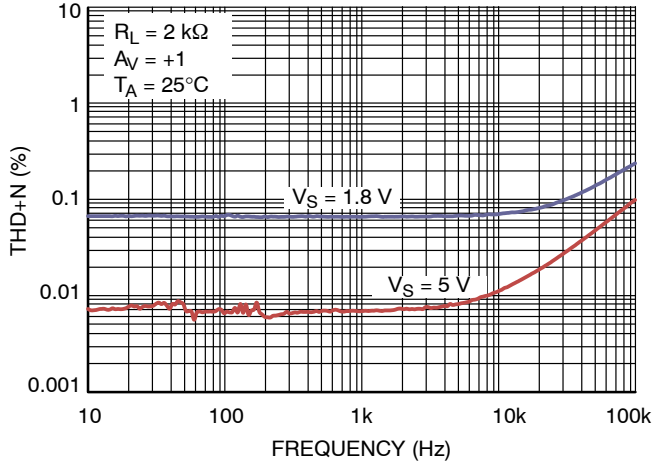


Figure 19. THD+N vs. Frequency

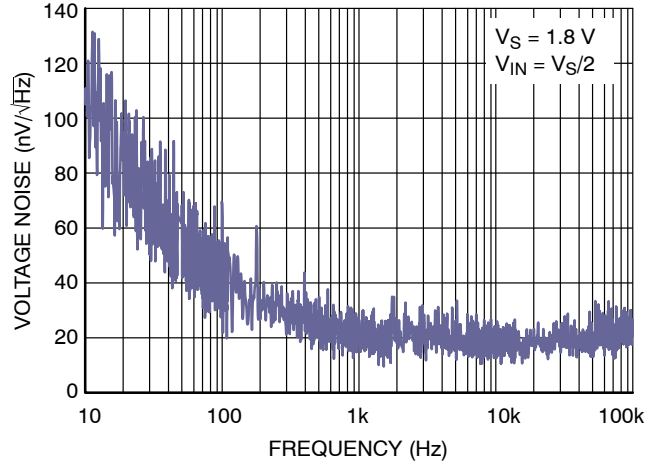


Figure 20. Input Voltage Noise vs. Frequency

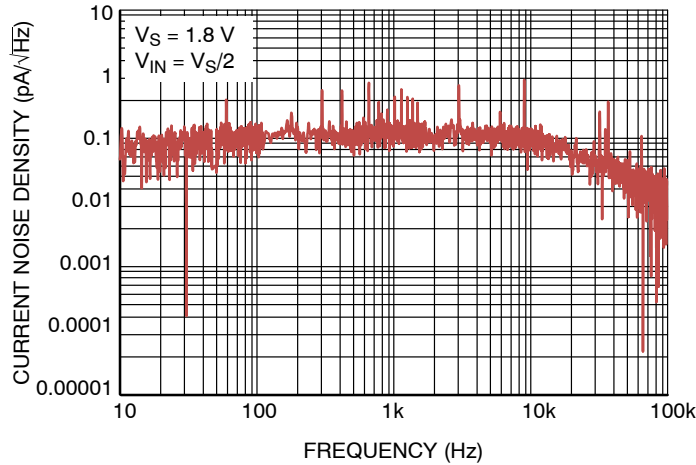


Figure 21. Noise Density vs. Frequency

ORDERING INFORMATION

Device	Marking	Package	Shipping†
NCS2003SN2T1G	AN3	SOT23-5 (Pb-Free)	3000 / Tape and Reel
NCV2003SN2T1G* (In Development)	AN3	SOT23-5 (Pb-Free)	3000 / Tape and Reel
NCS2003XV53T2G	A3	SOT553-5 (Pb-Free)	4000 / Tape and Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D

*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

NCS2003, NCV2003

PACKAGE DIMENSIONS


TSOP-5 CASE 483-02 ISSUE K

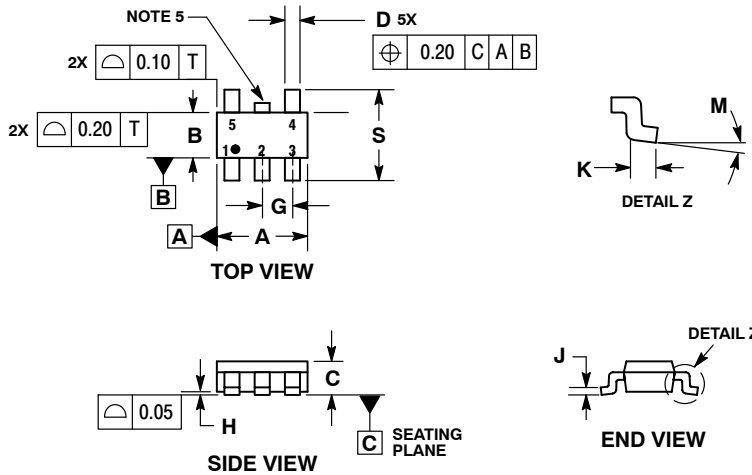

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
 4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION A.
 5. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.

DIM	MILLIMETERS	
	MIN	MAX
A	3.00 BSC	
B	1.50 BSC	
C	0.90	1.10
D	0.25	0.50
G	0.95 BSC	
H	0.01	0.10
J	0.10	0.26
K	0.20	0.60
M	0°	10°
S	2.50	3.00

SOLDERING FOOTPRINT*

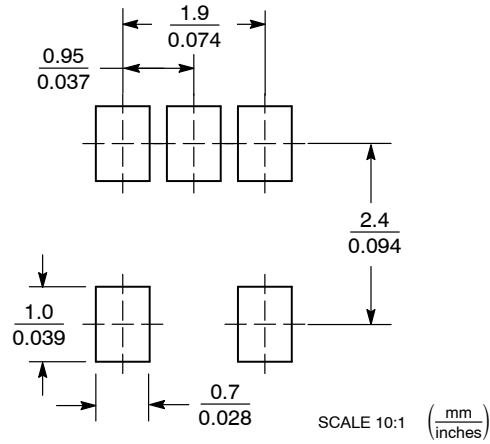

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



NCS2003, NCV2003

PACKAGE DIMENSIONS

SOT-553, 5 LEAD

CASE 463B

ISSUE C

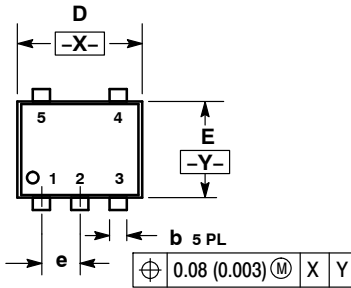


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.50	0.55	0.60	0.020	0.022	0.024
b	0.17	0.22	0.27	0.007	0.009	0.011
c	0.08	0.13	0.18	0.003	0.005	0.007
D	1.55	1.60	1.65	0.061	0.063	0.065
E	1.15	1.20	1.25	0.045	0.047	0.049
e	0.50 BSC			0.020 BSC		
L	0.10	0.20	0.30	0.004	0.008	0.012
HE	1.55	1.60	1.65	0.061	0.063	0.065

RECOMMENDED SOLDERING FOOTPRINT*

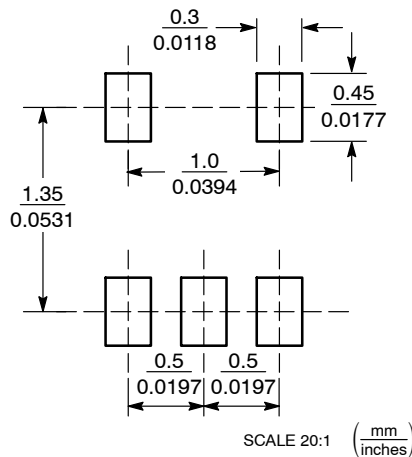

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative