

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [39-00-0121](#)  
**Status:** **Active**  
**Overview:** [Mini-Fit Jr.™ Power Connectors](#)  
**Description:** Mini-Fit® Male Crimp Terminal, Tin (Sn) Plated Brass Contact, 18-24 AWG, Bag

**Documents:**

[Drawing \(PDF\)](#) [Test Summary TS-5556-002 \(PDF\)](#)  
[Product Specification PS-5556-002 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Crimp Terminals
Series	5558
Application	Power
Crimp Quality Equipment	Yes
Overview	<a href="#">Mini-Fit Jr.™ Power Connectors</a>
Product Name	Mini-Fit®
UPC	800753512047

**Physical**

Durability (mating cycles max)	30
Gender	Male
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.138/g
Packaging Type	Bag
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.30-3.10mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm²	N/A

**Electrical**

Current - Maximum per Contact	9A
Voltage - Maximum	600V

**Solder Process Data**


Lead-free Process Capability	SMC & Wave Capable (TH only)
Process Temperature max. C	260

**Material Info**

Old Part Number	5558-SL
-----------------	---------

**Reference - Drawing Numbers**

Product Specification	PS-5556-002
Sales Drawing	SD-5558-*S*
Test Summary	TS-5556-002

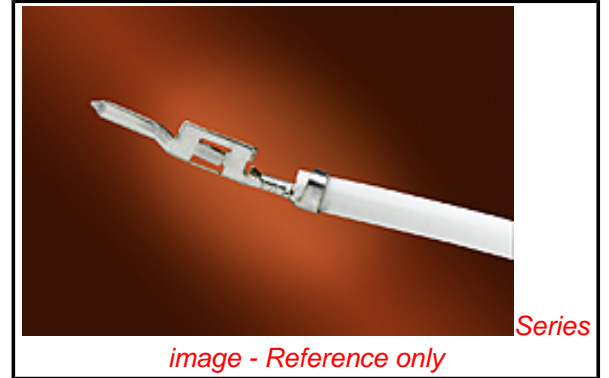

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC Contains SVHC: No Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[5558Series](#)

**Mates With**

[5556 Mini-Fit® Crimp Terminal](#)

**Use With**

[5559 Mini-Fit Jr.™ Plug Housing, 30068 Mini-Fit® TPA Plug Housing, 42475 Mini-Fit® BMI Plug Housing](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Hand Crimp Tool for Male and Female Crimp Terminals, 16-24 AWG Wire	<a href="#">0638190900</a>
FineAdjust™ Applicator for	<a href="#">0639023900</a>

Insulation OD	
1.40-1.70mm - 18-24	
AWG	
T2 Terminator™	<u>0639115600</u>
for insulation OD	
1.90-2.30mm - 18-24	
AWG	
T2 Terminator™	<u>0639123900</u>
for insulation OD	
1.40-1.70mm - 18-24	
AWG	
FineAdjust™	<u>0639002600</u>
Applicator for	
Insulation OD	
2.50-2.95mm - 18-24	
AWG	
FineAdjust™	<u>0639002900</u>
Applicator for	
Insulation OD	
1.65-2.05mm - 18-24	
AWG	
FineAdjust™	<u>0639024900</u>
Applicator for	
Insulation OD	
2.30-2.60mm - 18-24	
AWG	
T2 Terminator™	<u>0639124900</u>
for insulation OD	
2.30-2.60mm - 18-24	
AWG	
T2 Terminator™	<u>0639102600</u>
for insulation OD	
2.50-2.95mm - 18-24	
AWG	
FineAdjust™	<u>0639015600</u>
Applicator for	
Insulation OD	
1.90-2.30mm - 18-24	
AWG	
FineAdjust™	<u>0639024800</u>
Applicator for	
Insulation OD	
2.50-2.95mm	
Optimized for 18	
AWG Only	
T2 Terminator™	<u>0639124800</u>
for insulation OD	
2.50-2.95mm	
optimized for 18	
AWG only	
Extraction Tool	<u>0011030044</u>

This document was generated on 06/27/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**