

Ultra-Broadband DC Block

PSPL5509 Datasheet



The PSPL5509 DC Block is an ultra-broadband inner conductor DC block with a flat frequency response over many decades up to 50 GHz. It is available in a choice of 2.92 mm or 2.4 mm connectors. The PSPL5509 with option 16V optimizes low frequency performance, the PSPL5509 with option 50V optimizes return loss

Key Performance Specifications

- From 7 kHz to 50 GHz Bandwidth
- 5 ps Risetime
- 1 dB Insertion Loss to 40 GHz
- Available with 16 VDC or 50 VDC

Specifications

Parameter	PSPL5509 option 16V	PSPL5509 option 50V
Capacitance	0.02 μ F	500 pF
Voltage	16 V maximum	50 V maximum
Insertion Loss (all connector types) (2.4 mm only)	<1 dB typical, f < 40 GHz 2 dB max. at 40 GHz 3 dB max. at 50 GHz	
Low Frequency (-3 dB)	7 kHz	3 MHz
Risetime (10%-90%)	5.1 ps	
Delay	126 ps	
Impedance	50 Ω	
Return Loss	See Typical Performance	
Dimensions	2.92 mm 35.1 x 15.9 x 7.9 mm 2.4 mm 36.7 x 15.9 x 7.9 mm	
Warranty	1 Year	

Note: Parameters listed are typical values. Max/min limits for insertion loss are guaranteed.

[2] Frequency response measured using a Wiltron 37369A 40 MHz - 40 GHz network analyzer.




Typical Performance

Insertion Loss
0.2 dB/div,
40 MHz to 50GHz,
4 GHz/div




Group Delay
0.2 dB/div,
40 MHz to 50GHz, 4
GHz/div

Return Loss
0.2 dB/div,
40 MHz to 50GHz, 4
GHz/div

PSPL5509
Option 16V

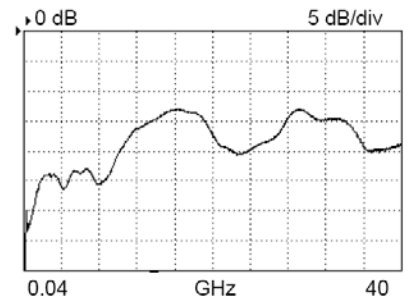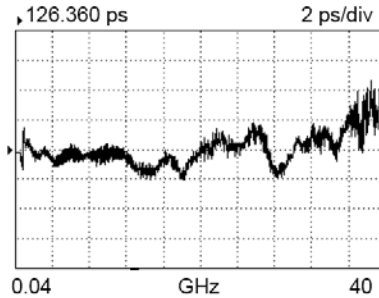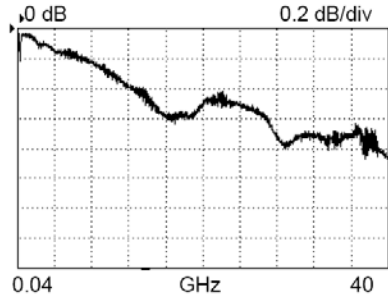


PSPL5509
Option 50V

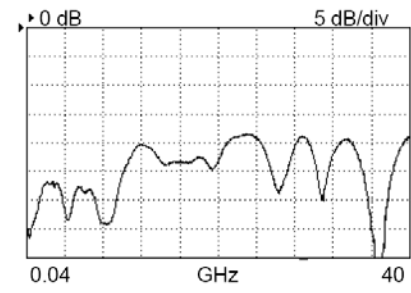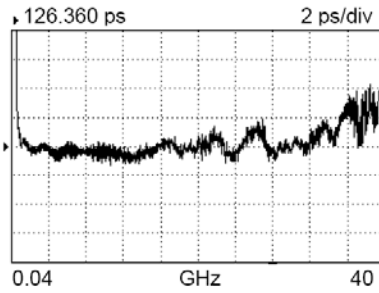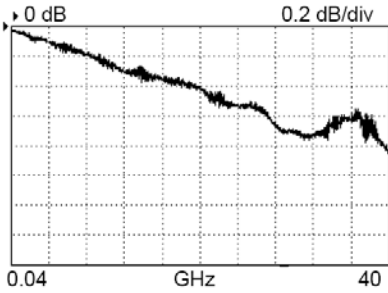


Step Response, 10 ps/div

Note: Step response measured using a PSPL Model 4015C 15 ps pulse generator.

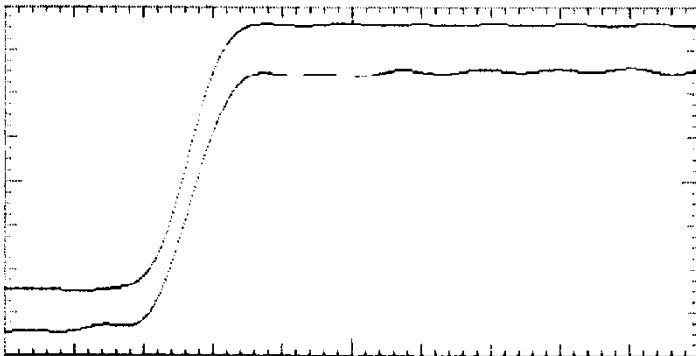

PSPL5509 Mechanical dimensions

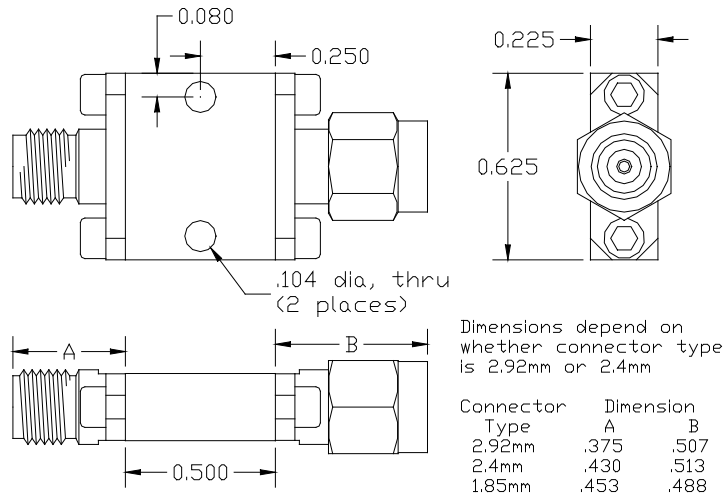

Ordering information

Model	Description
PSPL5509	Ultra-Broadband DC Block

Options

- Opt. 240JP Female 2.4 mm connectors input port, Male 2.4 mm connector on output port
- Opt. 292JP Female 2.92 mm connectors input port, Male 2.92 mm connector on output port
- Opt. 16V Maximum Voltage 16V
- Opt. 50V Maximum Voltage 50V

PSPL5509 Ultra-Broadband DC Block

ASEAN / Australasia (65) 6356 3900

Belgium 00800 2255 4835*

Central East Europe and the Baltics +41 52 675 3777

Finland +41 52 675 3777

Hong Kong 400 820 5835

Japan 81 (3) 6714 3010

Middle East, Asia, and North Africa +41 52 675 3777

People's Republic of China 400 820 5835

Republic of Korea 001 800 8255 2835

Spain 00800 2255 4835*

Taiwan 886 (2) 2722 9622

* European toll-free number. If not accessible, call: +41 52 675 3777

Austria 00800 2255 4835*

Brazil +55 (11) 3759 7627

Central Europe & Greece +41 52 675 3777

France 00800 2255 4835*

India 000 800 650 1835

Luxembourg +41 52 675 3777

The Netherlands 00800 2255 4835*

Poland +41 52 675 3777

Russia & CIS +7 (495) 6647564

Sweden 00800 2255 4835*

United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777

Canada 1 800 833 9200

Denmark +45 80 88 1401

Germany 00800 2255 4835*

Italy 00800 2255 4835*

Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90

Norway 800 16098

Portugal 80 08 12370

South Africa +41 52 675 3777

Switzerland 00800 2255 4835*

USA 1 800 833 9200

Updated 10 April 2013

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology.

Please visit www.tektronix.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

29 May 2014



1PW-30586-0

www.tektronix.com

Tektronix[®]