
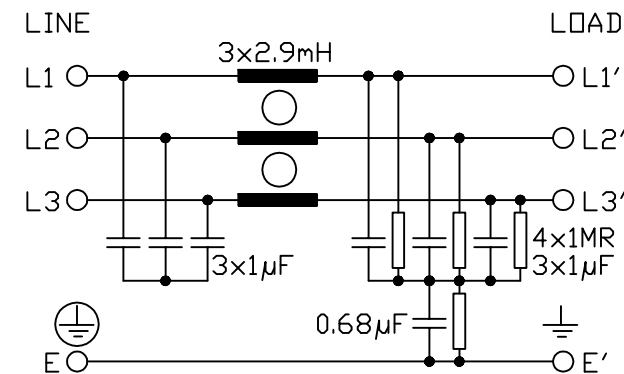
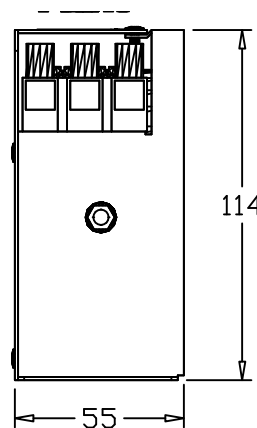


**SPECIFICATIONS**

VOLTAGE 500Vac  
 FREQUENCY 50/60Hz  
 CURRENT 18A @ 40°C  
 TEMPERATURE -25 TO 100°C  
 LEAKAGE CURRENT 30mA @ 500V 50Hz  
 HUMIDITY 90% RH (NON-CONDENSING)  
 VIBRATION 10-200Hz 1.8G  
 SURGE 4500Vpk 1.2/50µs  
 ELECTRIC STRENGTH 2250Vac/1min.  
 POWER DISSIPATION 11W  
 MASS 1.2kg  
 TERMINALS 10sqmm TERMINAL BLOCK  
 EARTH TERMINALS M5 STUD  
 FLANGE MOUNTING 4x M5

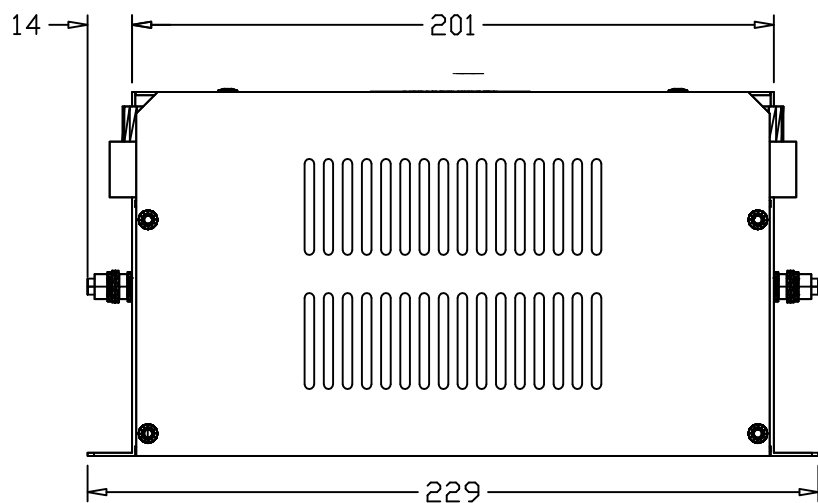

STANDARD FILTER

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES

**ROXBURGH ELECTRONICS LTD**

TITLE 3 PHASE 18A 500V INDUSTRIAL FILTER

DrgNo **KMF318-GS**

ISSUE **2**

GENERAL SPECIFICATION  
FOR KMF318

CUSTOMER

REFERENCE

Sheet 1of1 | Aprvd Date 26/09/97 | Aprvd By AT | Drwn by AT | SCALE | CNN | Location N: \DWG\GS\GS000078

© ROXBURGH ELECTRONICS LTD, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230