


Digital Storage Oscilloscope

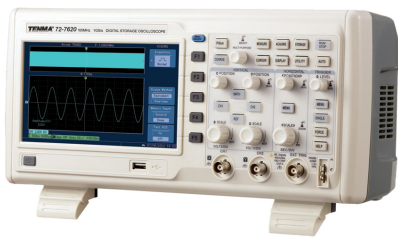

Features:

Channels	2
Bandwidth	100MHz
Sample Range	1GS/s
Rise Time	≤3.5ns
Memory Depth	16Mpts
Waveform Acquisition Rate	≥1,50,000wfms/s
Vertical Sensitivity	2mV/div to 10V/div
Time Based Range	2ns to 50s/div
Storage	Setup, Wave, Bitmap, CSV
Trigger Type	Edge, Pulse, Video, Slope, Alternate
Interfaces	USB Device, USB, Host, Pass/Fail

General Characteristic:

Power	100 - 240V AC, 45Hz - 440Hz
LCD Size	7 inches 64k Colour TFT LCD(800 × 480)
Product Colour	White and Grey
Product Net Weight	2.9kg
Product Size	330mm × 155mm × 130mm
Standard Accessories	Probe × 2 (1x, 10x switchable), Power Cord USB Cable, PC Software CD
Standard Individual Packing	Gift Box, English Manual

Part Number Table

Description	Part Number
Digital Storage Oscilloscope, 100MHz	72-7620

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell plc 2012.

