

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [02-06-6102](#)  
**Status:** **Active**  
**Overview:** Standard .062" Pin and Socket Power Connectors  
**Description:** 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1560, Male, with .76µm Selective Gold (Au) Plated Brass Contact, 18-24 AWG, Bag Packaged

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Crimp Terminals
Series	<a href="#">1560</a>
Application	Power
Crimp Quality Equipment	Yes
Overview	<a href="#">Standard .062" Pin and Socket Power Connectors</a>
Packaging Alternative	<a href="#">02-06-6101 (Reel)</a>
Product Name	Standard .062"
UPC	800753615816

**Physical**


Gender	Male
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Net Weight	0.128/g
Packaging Type	Bag
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Wire Insulation Diameter	1.52-3.05mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm <sup>2</sup>	N/A

**Material Info**

Old Part Number [1560-\(561\)L](#)

**Reference - Drawing Numbers**

Sales Drawing [SD-1560\\*](#)

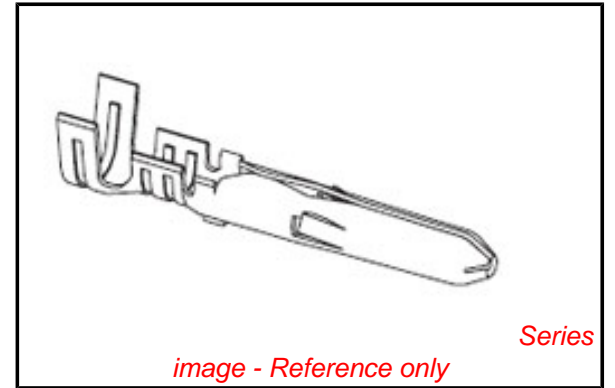

*image - Reference only*

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[1560Series](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Hand Crimper - DISTRIBUTION ONLY	<a href="#">0638111000</a>
Hand Crimp Tool for Standard 1.57mm Pin and Socket Crimp Terminals, 18-24 AWG	<a href="#">0638191300</a>
Hand Insertion Tool	<a href="#">0011020001</a>
Manual Extraction Tool	<a href="#">0011030002</a>

This document was generated on 10/09/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**