



Switching Transistor TO-92



Pin Configuration:

1. Emitter
2. Base
3. Collector

Features:

- PNP Silicon Planar Epitaxial Transistors
- General Purpose Switching Applications

Absolute Maximum Ratings

Parameters	Symbol	2N4403	Unit
Collector Emitter Voltage	V_{CEO}	40	V
Collector Base Voltage	V_{CBO}		
Emitter Base Voltage	V_{EBO}	5	
Collector Current Continuous	I_C	600	mA
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate above 25°C	P_D	625 5.0	mW mW/ $^\circ\text{C}$
Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C		1.5 12	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_j, T_{stg}	-55 to +150	$^\circ\text{C}$

Thermal Resistance

Junction to Case	$R_{th(j-c)}$	83.3	$^\circ\text{C/W}$
Junction to Ambient	$R_{th(j-a)}$	200	

Switching Transistor

TO-92



Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameters	Symbol	Test Condition	2N4403	Unit
Collector Emitter Voltage	BV_{CEO}^*	$I_C = 1\text{mA}, I_B = 0$	>40	V
Collector Base Voltage	BV_{CBO}	$I_C = 100\mu\text{A}, I_E = 0$		
Emitter Base Voltage	BV_{EBO}	$I_E = 100\mu\text{A}, I_C = 0$	>5	
Base Cut off Current	I_{BEV}	$V_{CE} = 35\text{V}, V_{EB} = 0.4\text{V}$	<0.1	μA
Collector Cut off Current	I_{CEX}	$V_{CE} = 35\text{V}, V_{EB} = 0.4\text{V}$		
Collector Emitter Saturation Voltage	$V_{CE(\text{Sat})}^*$	$I_C = 150\text{mA}, I_B = 15\text{mA}$ $I_C = 500\text{mA}, I_B = 50\text{mA}$	<0.4 <0.75	V
Base Emitter Saturation Voltage	$V_{BE(\text{Sat})}^*$	$I_C = 150\text{mA}, I_B = 15\text{mA}$ $I_C = 500\text{mA}, I_B = 50\text{mA}$	0.75 - 0.95 <1.3	
DC Current Gain	h_{FE}	$I_C = 0.1\text{mA}, V_{CE} = 1\text{V}$ $I_C = 1\text{mA}, V_{CE} = 1\text{V}$ $I_C = 10\text{mA}, V_{CE} = 1\text{V}$ $I_C = 150\text{mA}, V_{CE} = 1\text{V}^*$ $I_C = 150\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 500\text{mA}, V_{CE} = 2\text{V}^*$	>30 >60 >100 - 100 - 300 >20	-

Dynamic Characteristics

Small Signal Current Gain	h_{fe}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	60 - 500	-
Input Impedance	h_{ie}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	1.5 - 15	$\text{k}\Omega$
Voltage Feedback Ratio	h_{re}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	0.1 - 8	$\times 10^{-4}$
Output Impedance	h_{oe}	$I_C = 1\text{mA}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	1 - 100	$\mu\Omega$
Collector-Base Capacitance	C_{cb}	$V_{CB} = 5\text{V}, I_E = 0, f = 100\text{kHz}$ $V_{CB} = 10\text{V}, I_E = 0, f = 140\text{kHz}$	- <8.5	pF
Emitter-Base Capacitance	C_{eb}	$V_{EB} = 0.5\text{V}, I_C = 0, f = 100\text{kHz}$ $V_{EB} = 0.5\text{V}, I_C = 0, f = 140\text{kHz}$	- <30	
Transition Frequency	f_T	$I_C = 20\text{mA}, V_{CE} = 10\text{V},$ $f = 100\text{MHz}$	>200	MHz

Switching Characteristics


Delay Time	t_d	$V_{CC} = 30\text{V}, V_{EB} = 2\text{V}$ $I_C = 150\text{mA}, I_{B1} = 15\text{mA}$	<15	ns
Rise Time	t_r		<20	
Storage Time	t_s	$V_{CC} = 30\text{V}, I_C = 150\text{mA}$ $I_{B1} = I_{B2} = 15\text{mA}$	<225	
Fall Time	t_f		<30	

*Pulse Test : Pulse Width: $\leq 300\mu\text{s}$, Duty $\leq 2.0\%$.


Switching Transistor T0-92




DC Current Gain

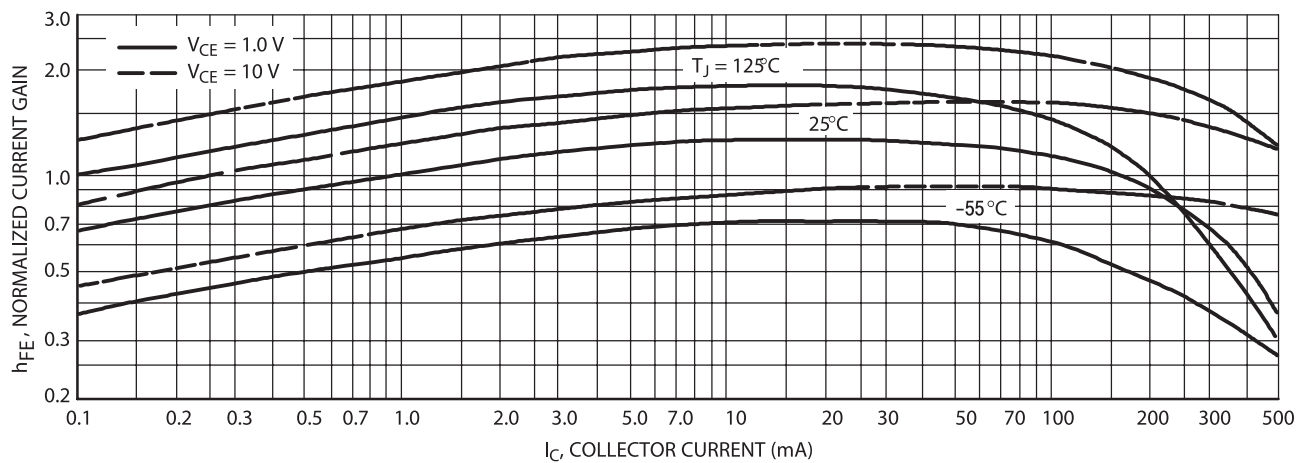


Collector Saturation Region

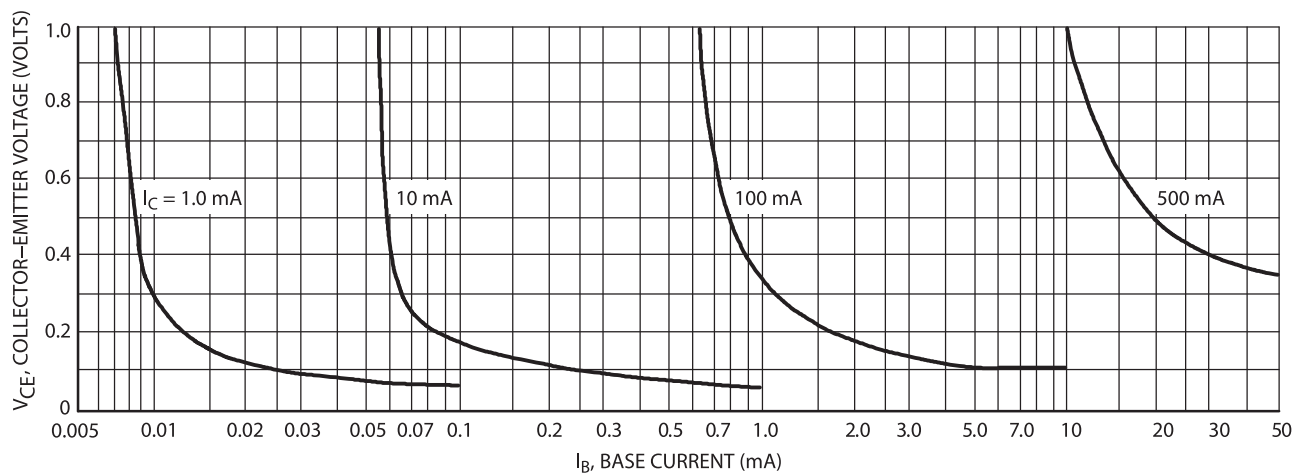

On Voltages

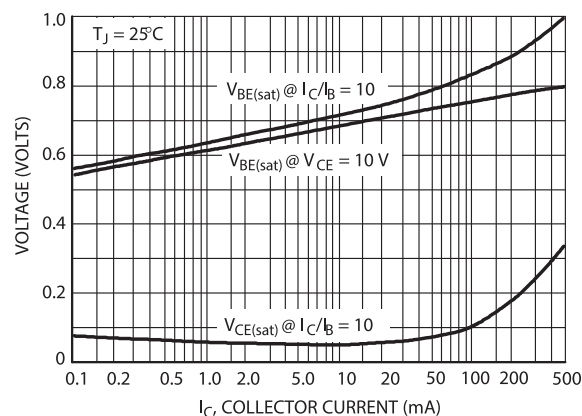

Switching Transistor TO-92

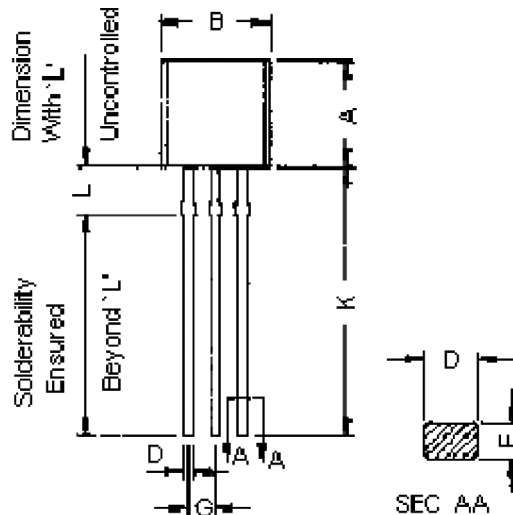

Dimensions	Min.	Max.
A	4.32	5.33
B	4.45	5.2
C	3.18	4.19
D	0.41	0.55
E	0.35	0.5
F	5°	
G	1.14	1.4
H		1.53
K	12.7	-
L	1.982	2.082

Dimensions : Millimetres



Pin Configuration:

1. Emitter
2. Base
3. Collector

Part Number Table

Description	Part Number
Transistor, PNP, TO-92	2N4403

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.