

Key Features

- Compact size
- 2.4 - 2.5GHz operation
- Price competitive
- 37mm x 6mm PCB



General Description


The Echo 18 2.4GHz PCB antenna is specifically aimed at the volume embedded WiFi, Bluetooth or ZigBee market.

The Echo 18 doesn't come with an adhesive pad but is easily glued in place with hot melt.

The Echo 18 is a competent performer in our tests and is well built and at a competitive price for volumes customers.

Additional Considerations

- 37mm x 6mmmm allows easy integration into small devices
- Specifically tuned to provide optimal performance for 2.4 - 2.5GHz frequency band

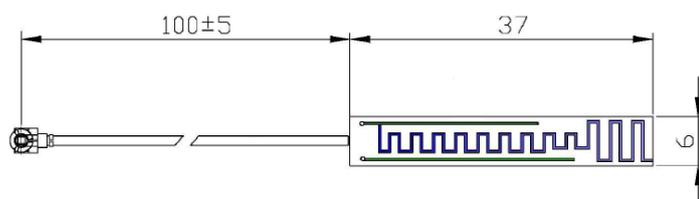

Rev 1.0

Key Specifications - Electrical


Operating temperature range:	-20 to +60°C
Impedance:	50 ohm
Gain:	2.6dBi
VSWR:	2.0:1
Voltage and supply current:	Passive
Operating frequency:	2.4 - 2.5GHz
Polarization:	Vertical
Radiating element and wave:	¼ wave dipole

Key Specifications - Mechanical


Dimensions:	37mm x 6mm (without cable)
Cable:	100mm x 1.13mm coax
Connector:	UFL

Test Reports


Return Loss

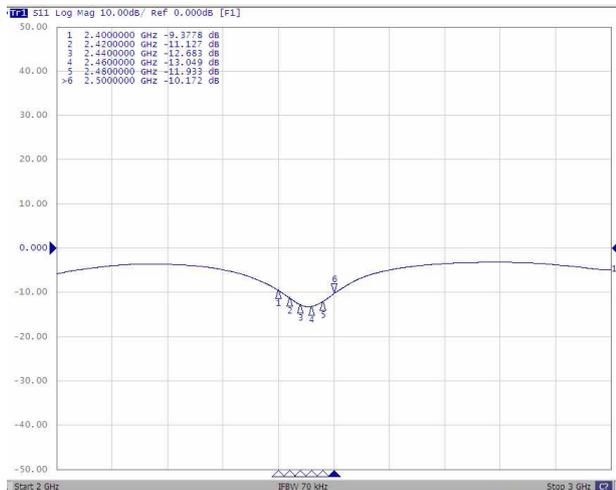

VSWR

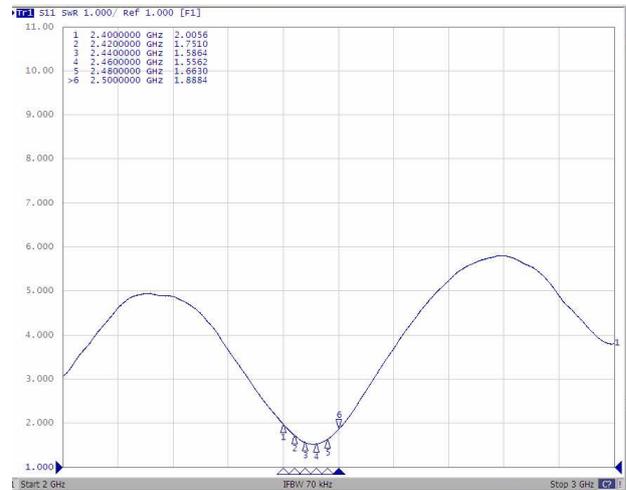

Smith Graph

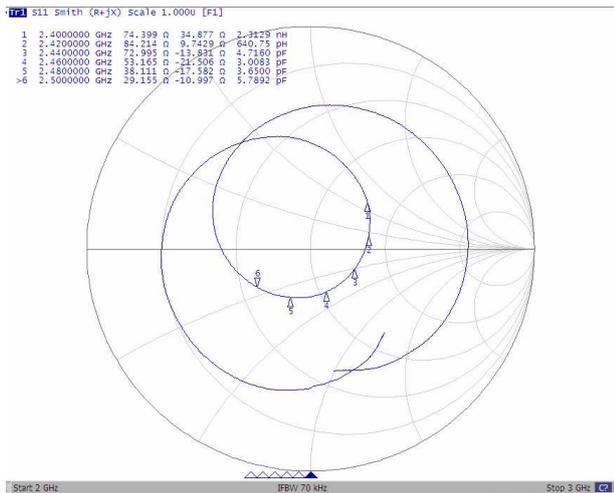

Ordering Details

Part Number

Description

ECHO18/0.1M/UFL/S/S/15

2.4GHz PCB Antenna, 100mm Cable, UFL Connector

Siretta is a division of Sequoia Technology Group Ltd

Registered in England No. 4004881
VAT Registration No. GB614 5653 45

Siretta
Basingstoke Road
Spencers Wood
Reading
Berkshire RG7 1PW

sales
fax
email
web

+44(0)118 976 9014
+44(0)118 976 9020
info@siretta.co.uk
www.siretta.co.uk