

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [19115-0030](#)
Status: **Active**
Overview: Solderless Terminals
Description: Avikrimp™ Snap Spade Terminal for 14-16 AWG Wire

Documents:

[Drawing \(PDF\)](#) [Product Specification PS-19902-015 \(PDF\)](#)
[Product Specification PS-19902-011 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E32244

General

Product Family Ring and Spade Terminals
 Series 19115
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Overview Solderless Terminals
 Product Name Avikrimp™
 Type Spade Snap
 UPC 800753092174

Physical


Barrel Type Closed
 Flammability 94V-2
 Insulation Nylon (PA)
 Material - Plating Mating Tin
 Net Weight 0.995/g
 Packaging Type Adhesive Tape on Reel
 Plating min - Mating 4.064µm
 Plating min - Termination 4.064µm
 Stud Size 8 (M4)
 Wire Insulation Diameter 4.30mm max.
 Wire Size AWG 14, 16

Material Info

Old Part Number BB-8716-08T

Reference - Drawing Numbers

Product Specification PS-19902-011, PS-19902-015
 Sales Drawing BBCD80503

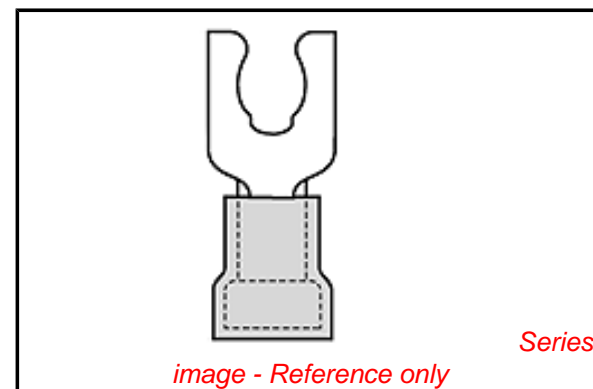

EU RoHS

**ELV and RoHS
 Compliant**
REACH SVHC
 Not Reviewed
Low-Halogen Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

19115Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Crimp Dies for MTA-100 Tape Applicator used in 3BF Press, MTA-105 Tape Applicator used in TM-2000™ Press, and ATP-301 Air Crimping Press for Mylar Tape Mounted Terminals Mini-Mac™ Applicator	<u>0192880123</u>
	<u>0638850400</u>

This document was generated on 12/10/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION