

Single Phase Bridge Rectifiers CM3500 Series



Features:


- Electrically isolated metal case for maximum heat dissipation
- Surge overload ratings to 400 amperes

Specifications:

Mechanical Data

Case : Metal, electrically isolated
 Terminals : Plated 0.25 inches faston
 Mounting Position : Any

CM Series

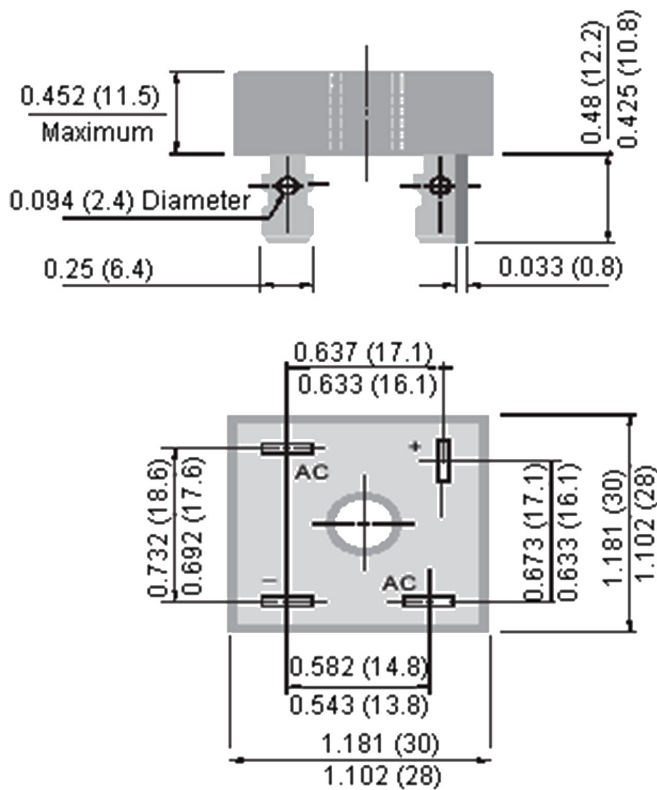

Dimensions : Inches (Millimetres)

www.element14.com
www.farnell.com
www.newark.com



Single Phase Bridge Rectifiers CM3500 Series



Maximum Ratings and Electrical Characteristics:

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Parameter	CM3501	CM3502	CM3504	CM3506	CM3508	CM35010	Unit
Maximum Recurrent Peak Reverse Voltage	100	200	400	600	800	1,000	V
Maximum RMS Bridge Input Voltage	70	140	280	420	560	700	
Maximum DC Blocking Voltage	100	200	400	600	800	1,000	
Maximum Average Forward Current $T_A = 55^\circ\text{C}$	35						A
Non-Repetitive Peak Forward Surge Current, Rated Load	400						
Maximum Forward Voltage Per Bridge Element specified Current at 17.5 A	1.2						V
Maximum Reverse Current at Rated DC Blocking Voltage Per Element	10						I-A
I ² t Rating for Fusing (t < 8.35 ms)	664						A2S
Typical Thermal Resistance (Figure 3) R θ JC	2.5						°C
Operating Temperature Range T_J	-55 to +150						°C
Storage Temperature Range T_A							

Note : * Unit mounted on metal heat-sink

Rating and Characteristic Curves:

Figure 1 Output Current VS. Case Temperature Resistive or Inductive Load $T_J = 150^\circ\text{C}$


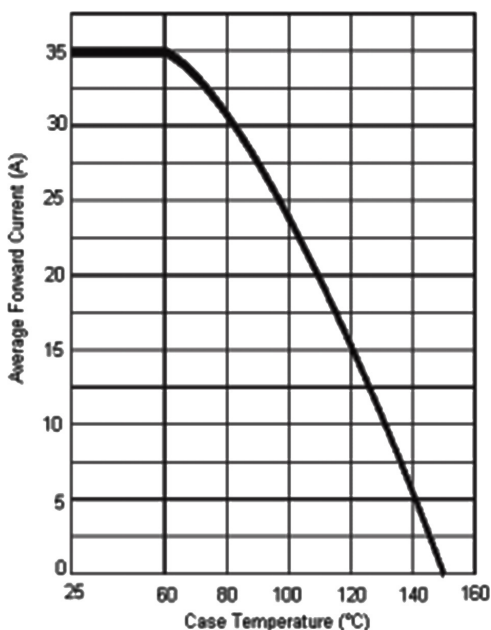


Figure 2 Typical Instantaneous Forward Characteristics at $T_J = 25^\circ\text{C}$

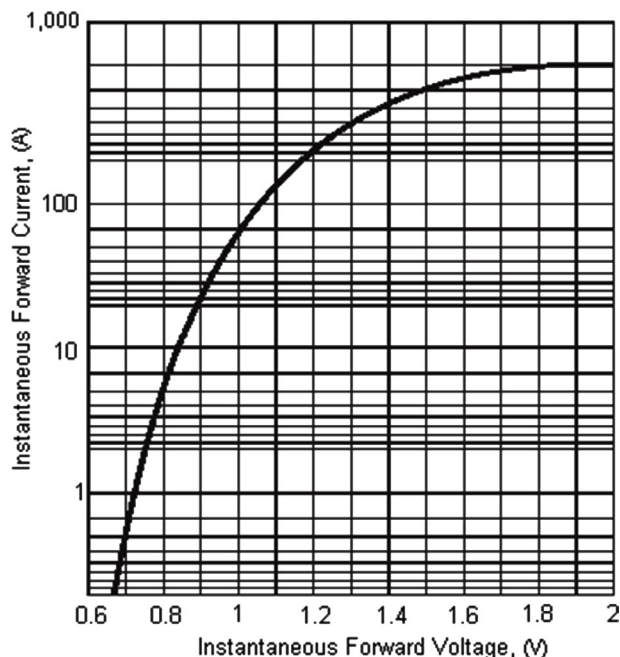

Single Phase Bridge Rectifiers CM3500 Series



Figure 3 Output Current VS. Ambient Temperature
Resistive or Inductive Load Bridge Mounted on 8 × 8 Inches Aluminium Plate 0.25 Inches Thick


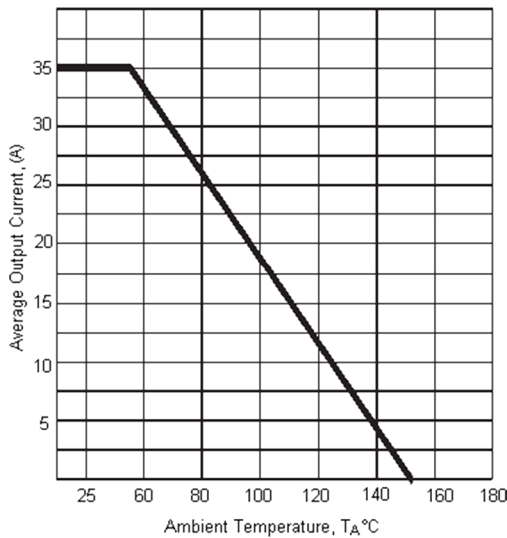


Figure 4 Power Dissipation VS. Average Output Current
Resistive or Inductive Load $T_J = 150^\circ\text{C}$

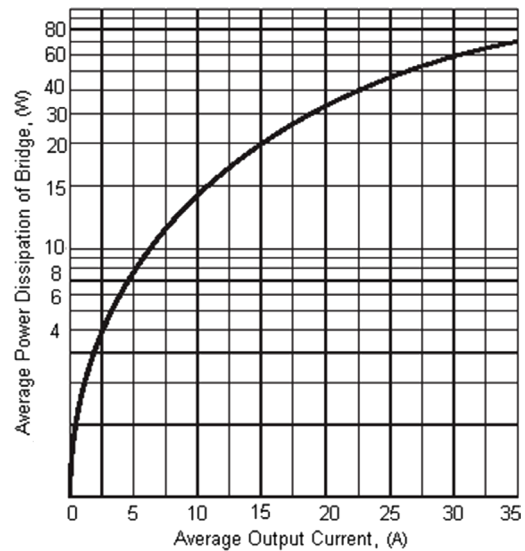

Part Number Table

Description	Current Rating (A)	VRRM (V)	Maximum AC Input Voltage (V)	Part Number
Single Phase Bridge Rectifiers CM3500 Series	35	100	70	CM3501
		200	140	CM3502
		400	280	CM3504
		600	420	CM3506
		800	500	CM3508
		1,000	800	CM35010

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

