

## 300 to 1008W AC-DC Power Module

### Features

- ◆ Low profile, small size
- ◆ 100°C baseplate temperature
- ◆ High power density
- ◆ High Efficiency
- ◆ Suitable for conduction cooling
- ◆ Power Factor Corrected (PFC)



### Key Market Segments & Applications



Specifications			PFE300SA PFE500SA	PFE700SA	PFE500F	PFE1000F
AC Input	VAC	85 to 265VAC, 47-63Hz (up to 440Hz) (4)				
Input Current (100 / 220VAC)	A	3.5 / 2.0	8.3 / 4.0	6.8 / 3.4	13.6 / 6.6	
Model dependant		6.0 / 2.9				
Inrush Current (100 /200VAC) (1)	A	20 / 40 peak				
Power Factor	-	0.95 minimum, meets EN61000-3-2				
Output Voltage Setpoint Accuracy	-	±2%	±1V	±2%	±2%	
Ripple and Noise (1)	-	1%	4V	1%	1%	
Over Current Protection	%	105 - 140% (Automatic Recovery)			105 - 140% Manual reset	
Over Voltage Protection	-	125 - 145%	60 - 69.6V	125 - 145%	125 - 145%	
Series Operation	-	Yes				
Parallel Operation	-	No	Yes (Droop mode)	Yes (Single wire)	Yes (Single wire)	
Power On Signal (ENA)	-	Open collector (10mA sink current). Low (on) when output is present				
Auxiliary Supply	-	None	None	10 - 14V, 20mA	10 - 14V, 20mA	
Remote On/Off (Opto isolated)	-	None	None	High = On	High = On	
Overtemperature Protection	-	Yes				
Operating Baseplate Temp.	°C	-40 to +100°C (2)				
Storage Temperature	°C	-40 to +100°C				
Humidity (non condensing)	-	Operating: 20 - 95%RH, Non Operating: 10 - 95%RH				
Cooling	-	Conduction				
Withstand Voltage (1 min) (3)	-	Input to Output 3kVAC, Input to Baseplate 2.5kVAC, Output to Baseplate 1.5kVDC				
Isolation Resistance	-	Output to baseplate: 100M Ohm at 500VDC, 25°C ambient, 70%RH				
Vibration (non operating)	-	10-55Hz (1 min sweep), constant amplitude 0.825mm (max 49m/s <sup>2</sup> ), X, Y, Z 1 hour each				
Shock	-	196.1m/s <sup>2</sup>				
Safety Certifications	-	UL60950-1, CSA60950-1 (cUL), EN60950-1, CE mark (LVD)				
Weight	g	200	250	300	500	
Size (WxHxL)	mm	61 x 12.7 x 116.8mm		70 x 12.7 x 122mm	100 x 13.4 x 160mm	
	in	2.4 x 0.5 x 4.6"		2.76 x 0.5 x 4.8"	3.94 x 0.53 x 6.3"	
Warranty	yrs	5 years			2 years	

Notes: (Consult Installation Manual for detailed specifications, test methods and application notes)

- 1) External components are required, consult Application Notes
- 2) PFE500SA-12, PFE500F-12: -40 to 85°C. See instruction manuals for derating curves  
PFE1000F28 & PFE1000F48: -40 to 85°C below 170VAC input voltage.  
See instruction manuals for derating curves
- 3) PFE500F, PFE1000F: 500VDC Output to baseplate
- 4) Reduced PFC above 63Hz. Contact technical support for 440Hz operation.


## Specifications

Model	Output Voltage (V)	Adjust. Range (V)	Maximum Current (A)	Maximum Wattage (W)	Load Reg. (mV)	Line Reg. (mV)	Efficiency typ (4)
PFE300SA-12	12	9.6 - 14.4	25	300	48	48	84 / 85
PFE500SA-12	12	9.6 - 14.4	33	396	48	48	84 / 86
PFE500F-12	12	9.6 - 14.4	42	504	48	48	81 / 83
PFE1000F-12	12	9.6 - 14.4	60	720	48	48	80 / 82
PFE300SA-28	28	22.4 - 33.6	10.8	302	56	56	86 / 88
PFE500SA-28	28	22.4 - 33.6	18	504	56	56	87 / 89
PFE500F-28	28	22.4 - 33.6	18	504	56	56	84 / 86
PFE1000F-28	28	22.4 - 33.6	36	1008	56	56	85 / 87
PFE300SA-48	48	38.4 - 57.6	6.3	302	96	96	87 / 89
PFE500SA-48	48	38.4 - 57.6	10.5	504	96	96	89 / 91
PFE500F-48	48	38.4 - 57.6	10.5	504	96	96	84 / 86
PFE1000F-48	48	38.4 - 57.6	21	1008	96	96	84 / 86
PFE700SA-48	51	None	14	714	50 - 57V (5)		88 / 91


(4) 100 / 200VAC. Efficiency values at 115/230VAC are 1% higher.

(5) Total regulation range


### PFE500SA Outline Drawing

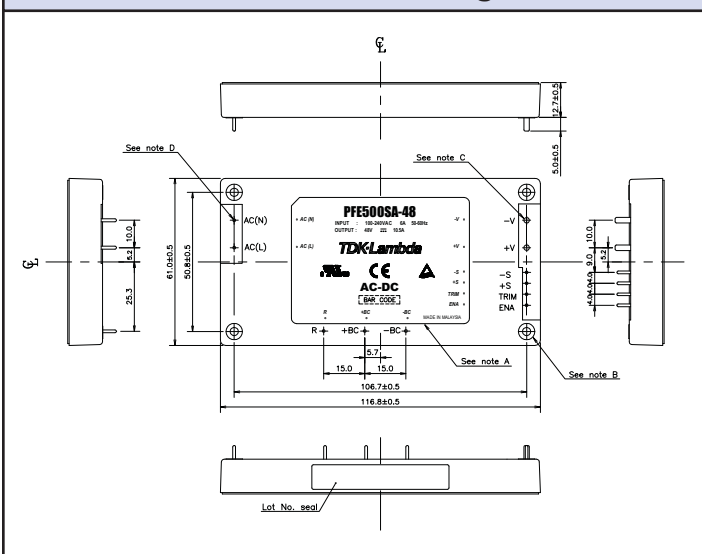

### PFE500F Outline Drawing

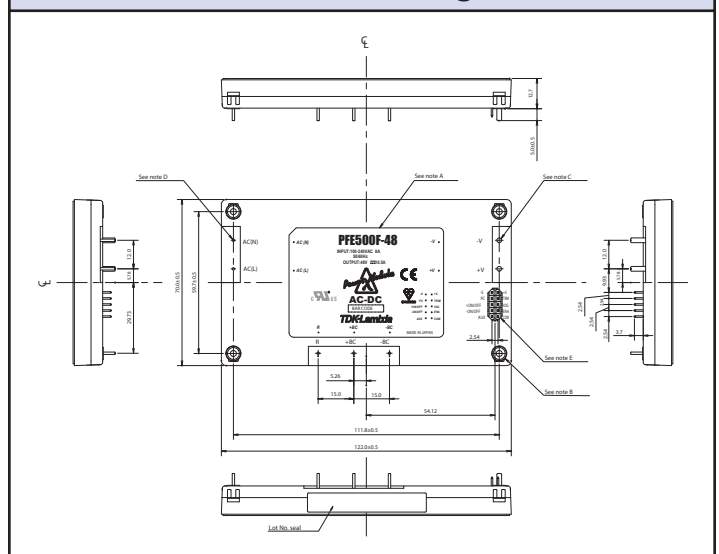

### PFE500S Basic connection

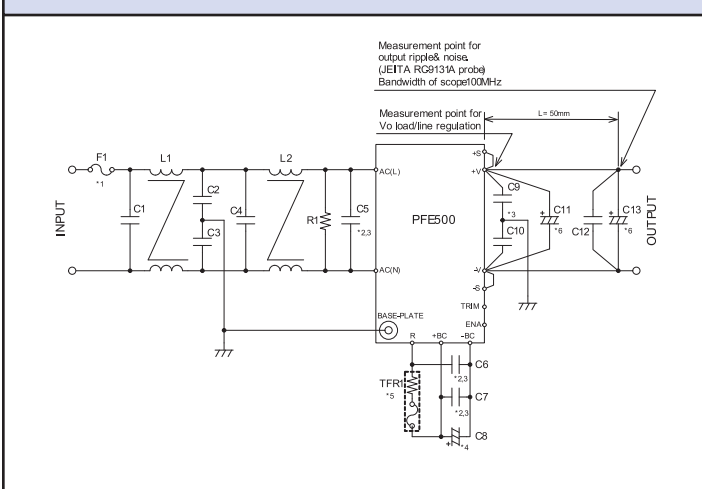

### Heatsink Table

Heatsink	Size (mm)	PFE Module
HAF-10L	116.8 x 25.4 x 61	PFE300/500S
HAF-15L	116.8 x 38.1 x 61	PFE300/500S
HAF-15T	116.8 x 38.1 x 61	PFE300/500S
HAL-F12T	122 x 35 x 69.9	PFE500F
HAM-F10T	160 x 33.4 x 100	PFE1000F

### Options

Suffix	Description
Blank	M3 tapped mounting inserts (4)
/T	3.3mm non-threaded inserts (4)

For Additional Information, please visit [us.tdk-lambda.com/lp/products/pfe-series.htm](http://us.tdk-lambda.com/lp/products/pfe-series.htm)

