

Single Phase Silicon Bridge Rectifier

$V_{RRM} = 600 \text{ V - } 1000 \text{ V}$
 $I_O = 6 \text{ A}$

Features

- Ideal for printed circuit board
- Low forward voltage drop
- Low leakage current
- Types from 600 V up to 1000 V V_{RRM}
- Not ESD Sensitive


Mechanical Data

Case: Molded plastic body

Mounting: Hole thru for #6 screw

Mounting position: Any

Lead: As marked

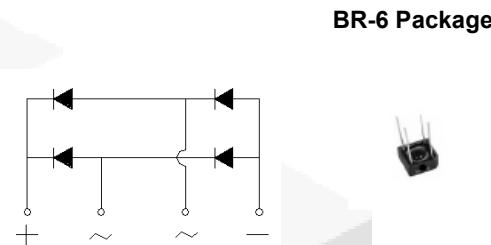

Maximum ratings at $T_c = 25^\circ\text{C}$, unless otherwise specified





Parameter	Symbol	Conditions	BR66	BR68	BR610	Unit
Repetitive peak reverse voltage	V_{RRM}		600	800	1000	V
RMS reverse voltage	V_{RMS}		420	560	700	V
DC blocking voltage	V_{DC}		600	800	1000	V
Operating temperature	T_j		-65 to 125	-65 to 125	-65 to 125	$^\circ\text{C}$
Storage temperature	T_{stg}		-65 to 150	-65 to 150	-65 to 150	$^\circ\text{C}$

Electrical characteristics at $T_c = 25^\circ\text{C}$, unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load

For capacitive load derate current by 20%


Parameter	Symbol	Conditions	BR66	BR68	BR610	Unit
Maximum average forward rectified current	I_O	$T_c = 75^\circ\text{C}$	6.0	6.0	6.0	A
Peak forward surge current	I_{FSM}	$t_p = 8.3 \text{ ms, half sine}$	200	200	200	A
Maximum instantaneous forward voltage drop per bridge element	V_F	$I_F = 3.0 \text{ A}$	1.0	1.0	1.0	V
Maximum DC reverse current at rated DC blocking voltage	I_R	$T_a = 25^\circ\text{C}$ $T_a = 100^\circ\text{C}$	10 200	10 200	10 200	μA

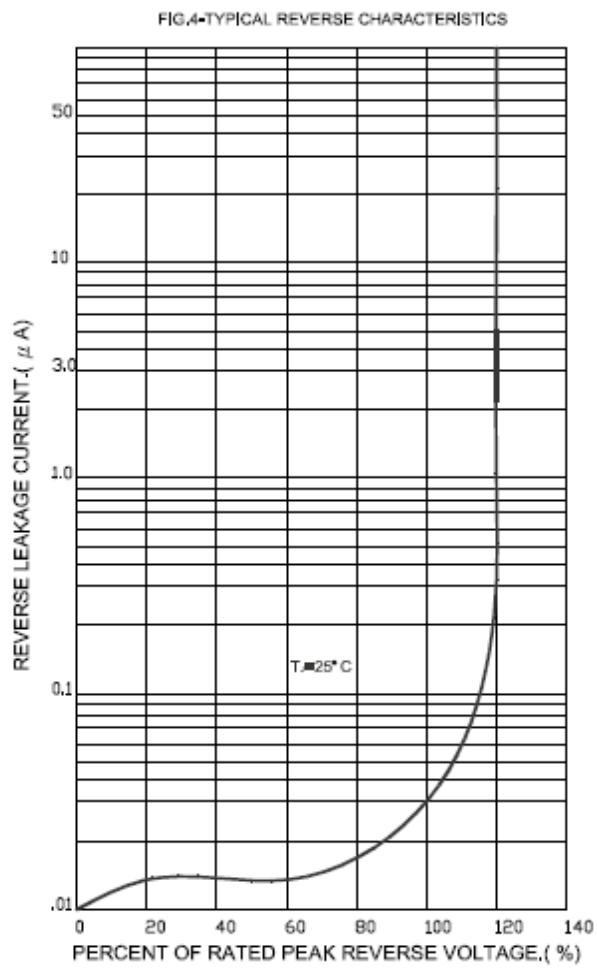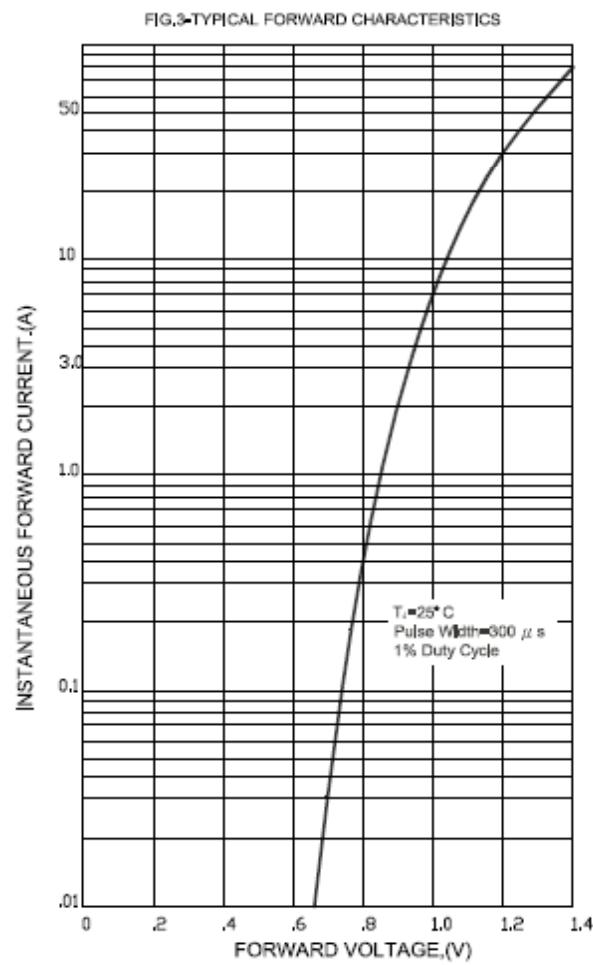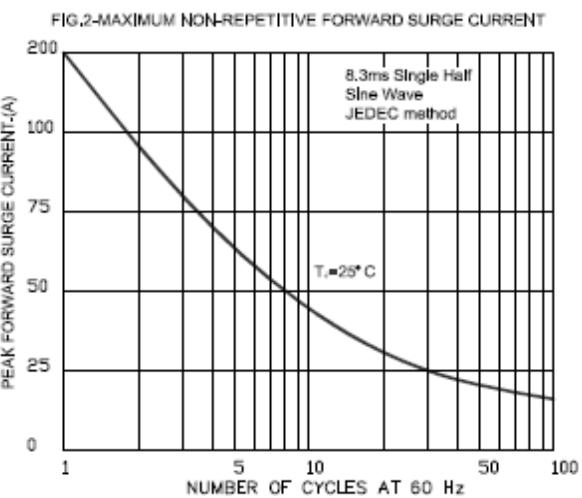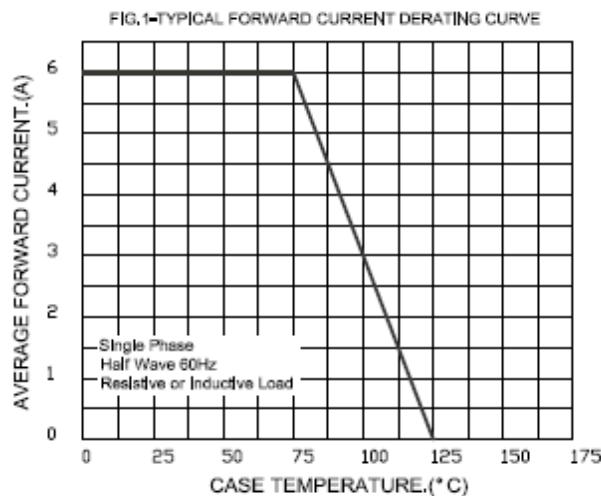

Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

BR-6

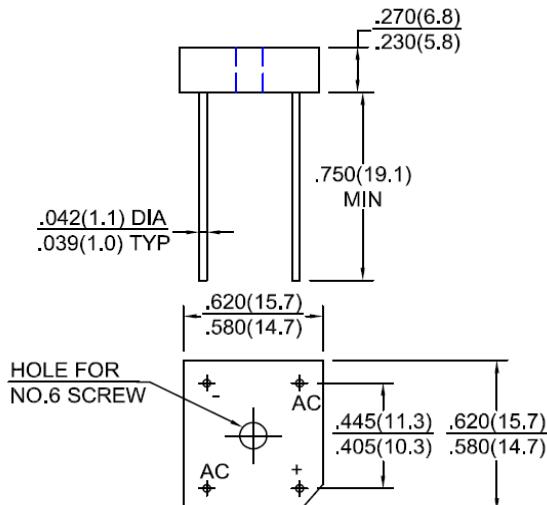

Dimensions in inches and (millimeters)

