



G-6 1/2 Contact Bayonet Base

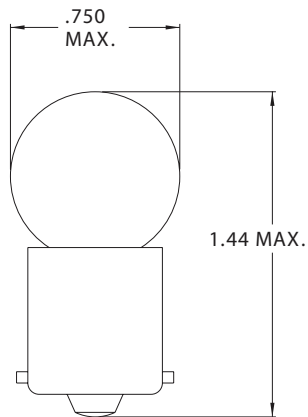

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
81	6.5	1.02	6.0	500	C-2R
63	7.0	.63	3.0	1,000	C-2R
89	13.0	.58	6.0	750	C-2R
98	13.0	.62	6.0	800	C-2V
67	13.5	.59	4.0	5,000	C-2R
69	13.5	.59	4.0	5,000	C-2F
97	13.5	.69	4.0	5,000	C-2V
1155	13.5	.59	4.0	5,000	C-2R
631	14.0	.63	6.0	1,000	C-2R
1247	14.0	.43	3.0	1,000	C-2R
71	22.0	.18	3.0	200	C-2V
509	24.0	.18	2.6	1,000	C-2V
303	28.0	.30	6.0	500	C-2F
623	28.0	.37	6.0	1,000	2C-2V
1251	28.0	.23	3.0	2,000	2C-2V
1223	32.0	.16	3.8	200	C-2V

G-6 1/2 Double Contact Bayonet Base

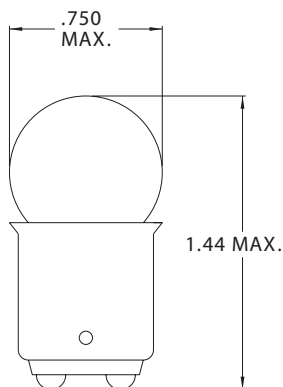

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
82	6.5	1.02	6.0	500	C-2R
83	6.5	1.15	6.0	1,200	C-2R
1314	6.5	1.02	6.0	500	C-2R
64	7.0	.63	3.0	1,000	C-2R
90	13.0	.58	6.0	750	C-2R
99	13.0	.62	6.0	800	C-2V
68	13.5	.59	4.0	5,000	C-2R
96	13.5	.69	4.0	5,000	C-2V
1178	13.5	.69	4.0	5,000	C-2V
632	14.0	.63	6.0	1,000	2C-2R
72	22.0	.18	3.0	200	C-2V
304	28.0	.30	6.0	500	C-2F
624	28.0	.37	6.0	1,000	2C-2V
1252	28.0	.23	3.0	2,000	2C-2V
1224	32.0	.16	3.8	200	C-2F