# Inductive Wirewound Resistors multicomp



### RoHS Compliant

#### Features:

- · Self extinguishing
- · Excellent flame and moisture resistance
- · Extremely small sturdy and mechanical safe

### **Performance Specification**

Product Type : Wire-wound resistor

Power Rating : 25 Watts
Resistance Tolerance : ±5%

Temperature Coefficient : <20Ω : ±400PPM/°C; ≥20 : ±350PPM/°C

Short-time Overload :  $\Delta R/R \le \pm (5\% + 0.05\Omega)$ , with no evidence of mechanical damage

Dielectric withstanding Voltage : No evidence of flashover, mechanical damage, arcing or insulation breakdown

Terminal Strength : No evidence of mechanical damage.

Solderability : Min. 95% coverage

Temperature Cycling :  $\Delta R/R \le \pm (2\% + 0.05\Omega)$ , with no evidence of mechanical damage Humidity (Steady State) :  $\Delta R/R \le \pm (5\% + 0.05\Omega)$ , with no evidence of mechanical damage

Load life in Humidity : For Wire-wound range, the  $\Delta$  R/R is ±5%


For Power film range, <100k $\Omega$ , the  $\Delta$  R/R is ±5% For Power film range, ≥100k $\Omega$ , the  $\Delta$  R/R is ±10%

Load life : For Wire-wound range, the  $\Delta$  R/R is  $\pm 5\%$ 

For Power film range, <100k $\Omega$ , the  $\Delta$  R/R is ±5% For Power film range, ≥100k $\Omega$ , the  $\Delta$  R/R is ±10%

Resistance to solderability heat  $\Delta R/R \pm (1\% + 0.05\Omega)$  with no evidence of mechanical damage

#### Diagram:

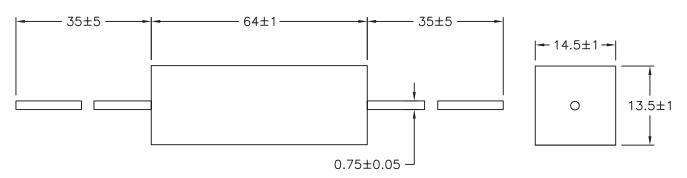


Dimensions: Millimetres


www.element14.com www.farnell.com www.newark.com



Page <1> 12/05/15 V1.1

# Inductive Wirewound Resistors multicomp




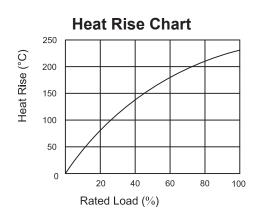

### **Explanation of Part Number**

(Cement Fixed Resistors)



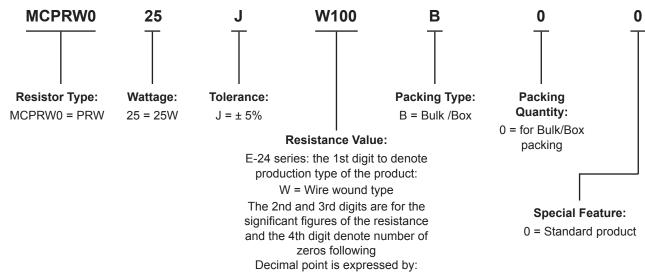

"J" ~ 0.1 Ex.: 4.7Ω ~ 47J

#### **Part Number Table**

| Description                         | Resistance<br>(Ohms) | Part Number      |
|-------------------------------------|----------------------|------------------|
| Inductive<br>Wirewound<br>Resistors | 2                    | MCPRW025JW20JB00 |
|                                     | 2.7                  | MCPRW025JW27JB00 |
|                                     | 3                    | MCPRW025JW30JB00 |
|                                     | 3.3                  | MCPRW025JW33JB00 |
|                                     | 3.9                  | MCPRW025JW39JB00 |

| Description                         | Resistance<br>(Ohms) | Part Number      |
|-------------------------------------|----------------------|------------------|
| Inductive<br>Wirewound<br>Resistors | 4.3                  | MCPRW025JW43JB00 |
|                                     | 4.7                  | MCPRW025JW47JB00 |
|                                     | 5.6                  | MCPRW025JW56JB00 |
|                                     | 6.8                  | MCPRW025JW68JB00 |
|                                     | 7.5                  | MCPRW025JW75JB00 |

www.element14.com www.farnell.com www.newark.com



## Inductive Wirewound Resistors multicomp

| Description                         | Resistance<br>(Ohms) | Part Number      |
|-------------------------------------|----------------------|------------------|
| Inductive<br>Wirewound<br>Resistors | 8.2                  | MCPRW025JW82JB00 |
|                                     | 10                   | MCPRW025JW100B00 |
|                                     | 15                   | MCPRW025JW150B00 |
|                                     | 20                   | MCPRW025JW200B00 |
|                                     | 27                   | MCPRW025JW270B00 |
|                                     | 30                   | MCPRW025JW300B00 |
|                                     | 33                   | MCPRW025JW330B00 |
|                                     | 39                   | MCPRW025JW390B00 |
|                                     | 43                   | MCPRW025JW430B00 |
|                                     | 47                   | MCPRW025JW470B00 |
|                                     | 56                   | MCPRW025JW560B00 |
|                                     | 68                   | MCPRW025JW680B00 |
|                                     | 75                   | MCPRW025JW750B00 |
|                                     | 82                   | MCPRW025JW820B00 |

| Description                         | Resistance<br>(Ohms) | Part Number      |
|-------------------------------------|----------------------|------------------|
| Inductive<br>Wirewound<br>Resistors | 100                  | MCPRW025JW101B00 |
|                                     | 150                  | MCPRW025JW151B00 |
|                                     | 200                  | MCPRW025JW201B00 |
|                                     | 270                  | MCPRW025JW271B00 |
|                                     | 300                  | MCPRW025JW301B00 |
|                                     | 330                  | MCPRW025JW331B00 |
|                                     | 390                  | MCPRW025JW391B00 |
|                                     | 430                  | MCPRW025JW431B00 |
|                                     | 470                  | MCPRW025JW471B00 |
|                                     | 560                  | MCPRW025JW561B00 |
|                                     | 680                  | MCPRW025JW681B00 |
|                                     | 750                  | MCPRW025JW751B00 |
|                                     | 820                  | MCPRW025JW821B00 |
|                                     | 1k                   | MCPRW025JW102B00 |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

