

# Single phase, primary switched mode power supply **PM-0124-010-0**



Picture shows PM-0124-040-0

## Advantages

Stabilised and adjustable output voltage
Low stand-by consumption <1 W
Constant current characteristic
DC OK signalling
Parallel operation option
Push-in terminals
Panel installation on mounting rails
Conform to EN 60335-1

## Applications

Efficient, primary switched mode power supply in slim plastic housing. A powerful and flexible option that's still light and compact. Our real all-rounders, these power supply units are suitable for a highly diverse range of applications in solar, measurement and control technology as well as industrial and building automation. The devices cover the lower and average power requirements from 25 W to 100 W. Versions with 12 V, 24 V, and 48 V are available, enabling a whole range of applications. A version with 3.8 A rated current is available for establishing NEC Class 2 circuits. All power supplies also comply with the EN 60335-1 standard for domestic appliances. The output voltage can be easily set using the rotary potentiometer on the front of the housing. The DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

## Standards

Primary switched mode power supply  
to UL 60950, UL 508

Safety:  
EN 61558-2-16, EN 60950-1, EN 60335-1

EMC:  
EN 61204-3

## Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




# Single phase, primary switched mode power supply

## PM-0124-010-0

Type	PM-0124-010-0
<b>Electrical data</b>	
<b>Input</b>	
Input rated voltage	100 - 240 Vac
Input voltage range	85 - 264 Vac (120 - 373 Vdc)
Input voltage derating	-2.5 %/Vac < 95 Vac
Rated frequency range	44 Hz - 66 Hz / 0 Hz
Input rated current (rated load)	0.43 A (100 Vac) / 0.2 A (240 Vac)
Starting current limiter	< 30 A, NTC
Switch-on time	2.3 s (100 Vac) / 0.74 s (230 Vac)
Power factor	0.48
Input fuse internal	2 A
Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristic B, C
Mains buffering	20 ms (100 Vac) / 120 ms (230 Vac)
Transient surge voltage protection	Varistor
<b>Output</b>	
Output rated voltage	24 Vdc
Output voltage range	23 - 28,5 Vdc
Output rated current	1 A
Output limited current	1.25 ... 1.4 A (constant current)
Class 2 output (UL Limited Power Source, LPS)	Yes
Parallel connection	Yes
Serial operation	Yes
Power dissipation, no load/rated load	< 1 W / 4 W (230 Vac)
Max. power losses	5 W (100 Vac / 24 V / 1 A)
Ripple factor	typ. 20 mVss
Resistance to reverse feed max.	35 Vdc
Over-voltage-protection	max. 39 Vdc
Efficiency	86 %
<b>Signaling</b>	
Typ. switching threshold for LED and signal output (DC OK)	-
Status indicator	LED green Uout > typ. 21.5 Vdc LED lit permanently
Signal output	Active high signal Uout > typ. 21.5 Vdc max. 20 mA@24 Vdc short circuit proof
<b>Approvals</b>	
Approvals	cURus, cULus, GL
<b>Environment</b>	
Storage temperature	-25° C ... +85° C
Ambient temperature	-25° C ... +70° C
Derating	-3 %/K > +50° C
Mounting position	horizontal for standard rail DIN TH 35
Cooling method	Natural convection
Required minimum spacing (left/right)	0 mm
Required minimum spacing (over/under)	50 mm
<b>Safety and protection</b>	
Protection index	IP 20
Safety class	II, without PE connection
<b>Order numbers</b>	
<b>Order Number</b>	<b>PM-0124-010-0</b>

Type	PM-0124-010-0
<b>Mechanical data</b>	
<b>Input</b>	
Connections input (direct plug-in technology Push-In)	max 2,5 mm <sup>2</sup>
<b>Output</b>	
Connections output (direct plug-in technology Push-In)	max 2,5 mm <sup>2</sup>
<b>Signaling</b>	
Connections signalling (direct plug-in technology Push-In)	max 2,5 mm <sup>2</sup>
<b>Measures and weights</b>	
Weight	0.13 kg
Dimension (W x H x D)	22.5 x 90 x 90.5 mm

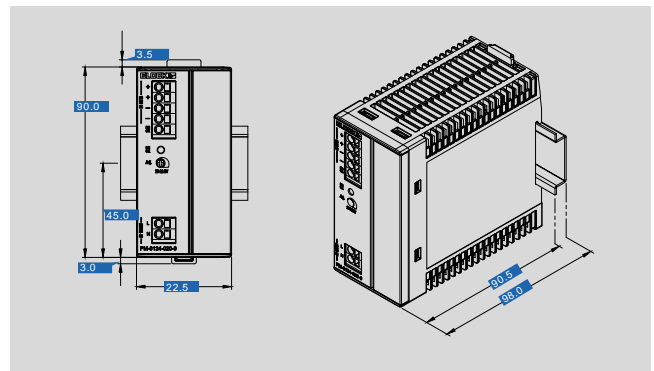

Subjects to change.