


PC Cable Tester

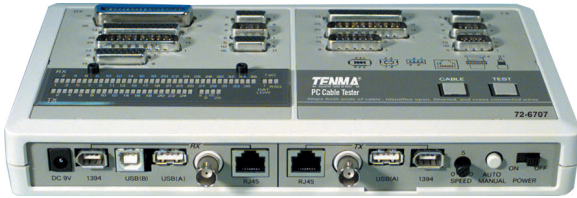

Description

PC Cable Tester Pro is the advanced version of the original PC Cable Tester. The Pro version provide with the USB and 1394 Firewire cable test. PC Cable Tester is a stand-alone testing device designed to provide its users with a wiremap of standard PC data cables. Its unique LED display clearly determines wiring status by providing a pin-to-pin outline of the actual wiring configuration. PC Cable Tester can quickly and simply diagnose the existence of open wires, shorted wires, crossed wires, mis-wiring, and continuity.

Specifications:

- Connectors : TX: DB25 M/F, DB9 M/F, HDB 15/M, RJ45/F
RX: Centronics 36/F, DB25 M/F, DB9 M/F, HD15/F & DB15F, RJ45/F
- Control switch : Wire numbers select x1; Auto/manual scanning switch x1;
Power on/off switch x1. Test x1 (for manual operation);
Scanning speed high/low switch x1
- Display : TX: 25 LEDs; Battery low x1; 4 sections wires selection (for 4, 9, 15, 25)
RX: 36LEDs; Ground Tx Ground RX
- Battery : DC 9V battery compartment; DC 9V 150mA power jack
- Dimensions : 250mm × 130mm × 35mm
- Weight : 400g

Part Number Table

| Description | Part Number |
|-----------------|-------------|
| PC Cable Tester | 72-6707 |

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell plc 2012.

