


RoHS
Compliant

Specifications:

Cable Length - Imperial	: 3.3 Ft
Cable Length - Metric	: 1m
Connector Type A	: Mains Plug, UK
Connector Type B	: IEC 60320 C19
Jacket Colour	: Black
Voltage Rating	: 250V
Current rating	: 13A

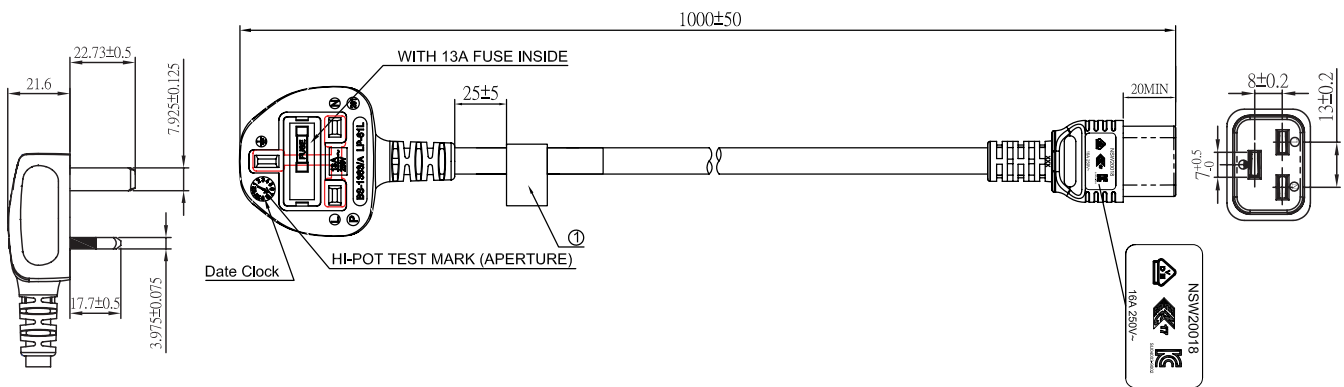

Dimensions : Millimetres

1 Warning Label:

This product is already fitted with a pre-wired plug incorporating a 13 amp fuse. If it does not fit your socket-outlet, the plug should be removed from the mains lead and safely disposed of. The flexible cord insulation should be prepared as appropriate and a suitable alternative plug fitted. If the replacement plug is intended to take a fuse then a 13 amp fuse must be used.

In the event of replacing a fuse in the plug supplied a 13 amp ASTA approved BS 1362 fuse must be used.





Note: The plug severed from the mains lead must be destroyed, as a plug with bare flexible cords is hazardous if engaged with a live socket-outlet.

Always replace the fuse cover, never use a plug with the fuse cover omitted.

Wires in the mains lead are coloured in accordance with the following code:

Green/Yellow	: Earth
Blue	: Neutral
Brown	: Live

The flexible cord of this accessory must be connected to a piece of equipment before being plugged into a socket-outlet. The equipment to which this plug and lead is attached must have a maximum current rating of 13 Amperes.

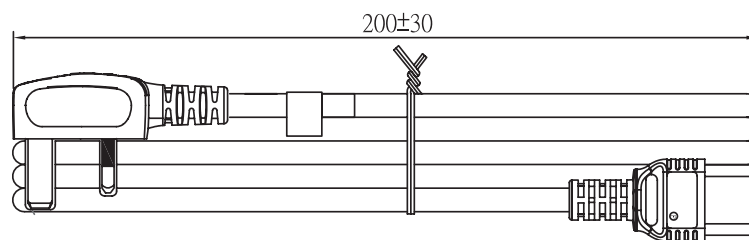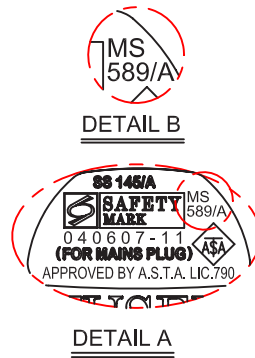

INDENT CABLE MARKING:

GFC-3R<VDE>KEMA-KEUR<SEMKO> <DEMKO><NEMKO><FIMKO> <CEBEC 618>
 <ÖVE> <+ <+ <+ IEMMEQU NF-USE-1291-H05VV-F 3G 1.5mm²

Dimensions : Millimetres

Notes:

1. Cable : The cord shall comply with IEC60227
2. Plug : The molded plug shall comply with BS1363 and fuse shall comply with BS1362
3. Connector: The Molded connector shall comply with IEC60320-1 Standard (C19 Connector)
4. The product shall be tested 100% for all safety electrical items

Part Number Table

Description	Part Number
Power Cord, UK Plug-IEC 60320 C19, 1m	GW-151608

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.