



APC Smart-UPS RT 3000VA 230V
Part Number: SURTD3000XLI



[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Software & Firmware](#) [Options](#)

Output

Output Power Capacity	2100 Watts / 3000 VA
Max Configurable Power	2100 Watts / 3000 VA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 3%
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz user adjustable +/- 0.1
Other Output Voltages	220, 240
Crest Factor	3 : 1
Topology	Double Conversion Online
Waveform Type	Sine wave
Output Connections	(8) IEC 320 C13 (2) IEC 320 C19 (2) IEC Jumpers
Bypass	Internal Bypass (Automatic and Manual)



Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 5 Hz (auto sensing)

Input Connections British BS1363A
IEC-320 C20
Schuko CEE 7/EU1-16P

Cord Length 2.44 meters

Input voltage range for main operations 160 - 280V

Input voltage adjustable range for mains operation 100 - 280 (half load)V

Other Input Voltages 220, 240

Batteries & Runtime

Battery Type Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof

Included Battery Modules 2

Typical recharge time 2.50 hour(s)


Replacement Battery
(Service center technician only) [APCRBC140](#)

RBC Quantity 1

Extended Run Options [APC Smart-UPS RT 3000VA 230V](#)

Runtime Graph

Curve	Part Number(s)
A	SURTD3000XLI
B	SURTD3000XLI + (1)SURT192XLBP
C	SURTD3000XLI + (2)SURT192XLBP
D	SURTD3000XLI + (3)SURT192XLBP
E	SURTD3000XLI + (4)SURT192XLBP

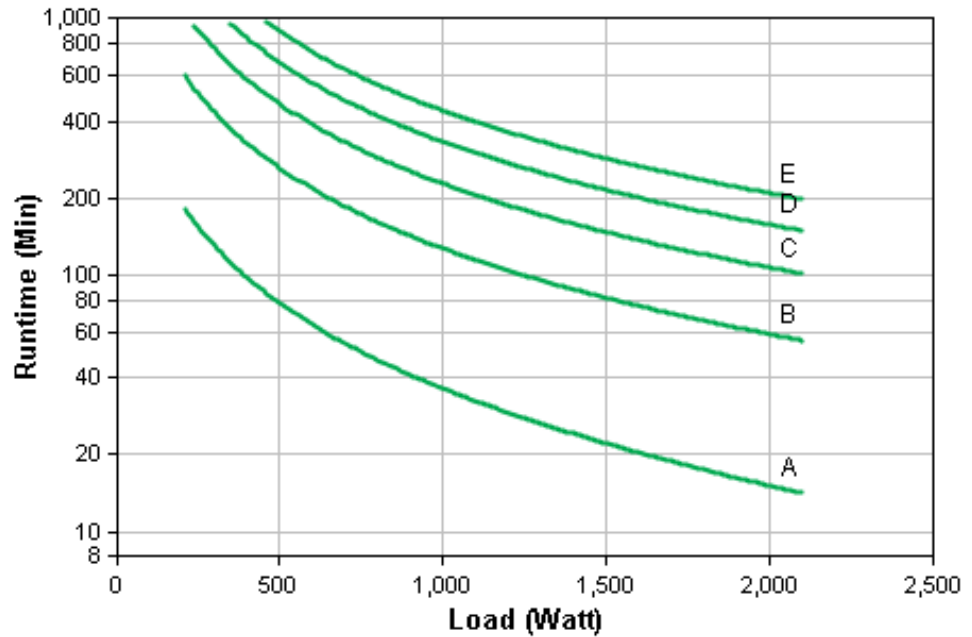

Hover over the line on the graph above to view the runtime at any desired load


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

Energy Use/Efficiency

Load	Efficiency
25%	86.4%
50%	90.3%
75%	91.3%
100%	91.6%

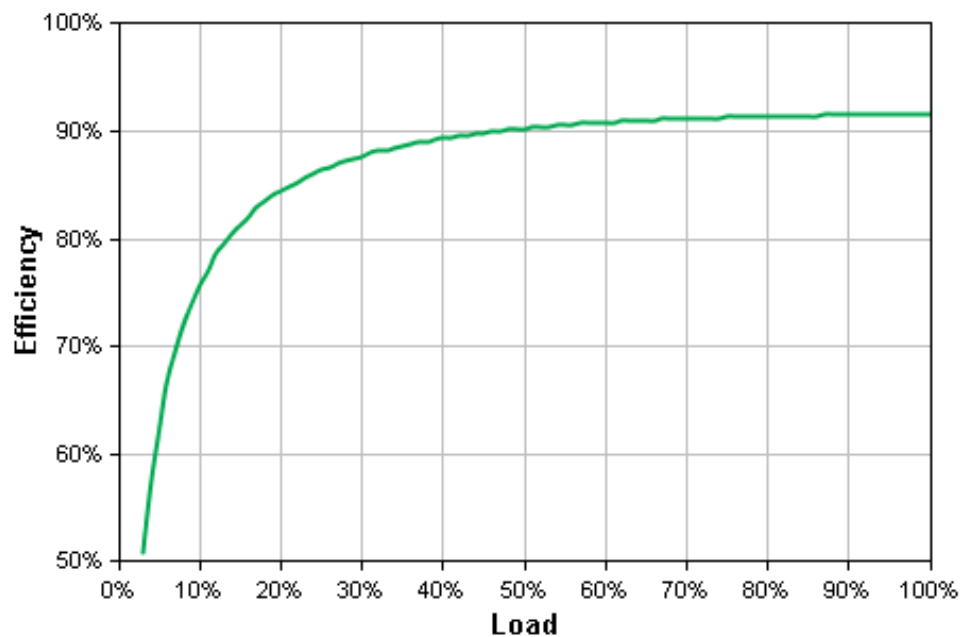

Hover over the line on the graph above to view the efficiency at any desired load

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and balanced resistive load (PF = 1.0) output.

Communications & Management

Interface Port(s)	RJ-45 Serial, Smart-Slot
Available SmartSlot™ Interface Quantity	1
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : Overload and Bypass Indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency Power Off (EPO)	Yes

Surge Protection and Filtering

Surge energy rating	555J Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	432.00 mm
Maximum Width	130.00 mm
Maximum Depth	660.00 mm
Rack Height	3U
Net Weight	54.55 KG
Shipping Weight	63.64 KG
Shipping Height	347.00 mm
Shipping Width	603.00 mm
Shipping Depth	980.00 mm
Master Carton Units	1.00
Color	Black
Units per Pallet	6.00

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95% no%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95% no%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	55.00 dBA
Online Thermal Dissipation	609.00 BTU/hr
Protection Class	IP 20

Conformance

Approvals	BSMI, C-tick, CE, CSA, EN 50091-1, EN 50091-2, EN 55022 Class A, EN 60950, EN
-----------	---

61000-3-2, GOST, JEON, UL 1778, VCCI, VDE

Standard warranty	2 years repair or replace
-------------------	---------------------------

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs
PEP	Available in Documentation tab
EOLI	Available in Documentation tab

*Except where noted, all prices are Estimated Resale Price (ERP) - Without Tax/VAT. Pricing in other locations and sites may vary.

**The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.