



# HOA086X/087X

## Transmissive Sensor

ELECTRICAL CHARACTERISTIC (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
<b>IR Emitter</b>						
Forward Voltage	V <sub>F</sub>			1.6	V	I <sub>F</sub> =20 mA
Reverse Leakage Current	I <sub>R</sub>			10	µA	V <sub>R</sub> =3 V
<b>DETECTOR</b>						
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	30			V	I <sub>C</sub> =100 µA
Emitter-Collector Breakdown Voltage	V <sub>(BR)ECO</sub>	5.0			V	I <sub>E</sub> =100 µA
Collector Dark Current	I <sub>CEO</sub>			100	nA	V <sub>CE</sub> =10 V, I <sub>F</sub> =0
<b>COUPLED CHARACTERISTICS</b>						
On-State Collector Current	I <sub>C(ON)</sub>				mA	
Parameter A (HOA0860/0865/0870/0875)		0.5				V <sub>CE</sub> =10, I <sub>F</sub> =20 mA
Parameter B (HOA0861/0866/0871/0876)		1.0				V <sub>CE</sub> =5 V, I <sub>F</sub> =10 mA
Parameter C (HOA0862/0867/0872/0877)		1.8				V <sub>CE</sub> =0.6, I <sub>F</sub> =20 mA
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>			0.4	V	
Parameter A (HOA0860/0865/0870/0875)			0.4			I <sub>C</sub> =0.4 mA, I <sub>F</sub> =20 mA
Parameter B (HOA0861/0866/0871/0876)			0.4			I <sub>C</sub> =0.8 mA, I <sub>F</sub> =10 mA
Parameter C (HOA0862/0867/0872/0877)			0.6			I <sub>C</sub> =1.8 mA, I <sub>F</sub> =20 mA
Rise And Fall Time	t <sub>r</sub> , t <sub>f</sub>		15		µs	V <sub>CC</sub> =5 V, I <sub>C</sub> =1 mA R <sub>L</sub> =1000 Ω

## ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C

## IR Emitter

Power Dissipation 100 mW <sup>(1)</sup>

Reverse Voltage 3 V

Continuous Forward Current 50 mA

## DETECTOR

Collector-Emitter Voltage 30 V

Emitter-Collector Voltage 5 V


Power Dissipation 100 mW <sup>(1)</sup>

Collector DC Current 30 mA

## Notes

1. Derate linearly 0.78 mW/°C above 25°C.

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

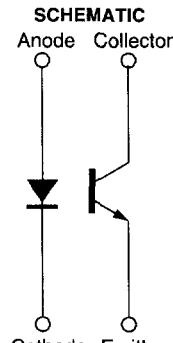

# Honeywell

# HOA086X/087X

## Transmissive Sensor

Fig. 1 IRED Forward Bias Characteristics

gra\_092.ds4

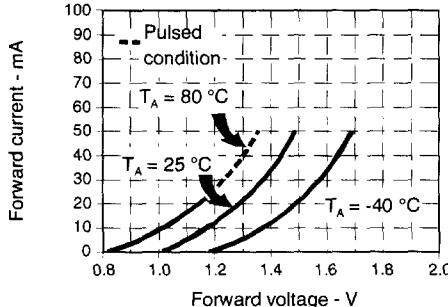


Fig. 2 Non-Saturated Switching Time vs Load Resistance

gra\_093.ds4

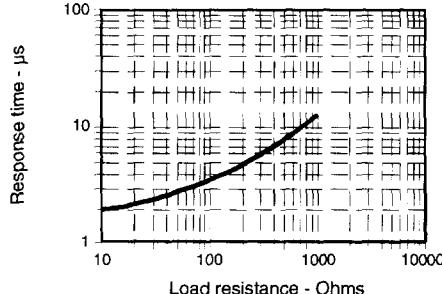


Fig. 3 Dark Current vs Temperature

gra\_301.cdr


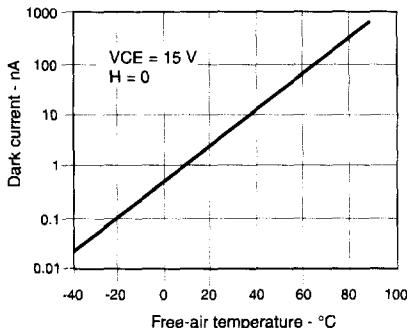


Fig. 4 Collector Current vs Ambient Temperature

gra\_095.ds4

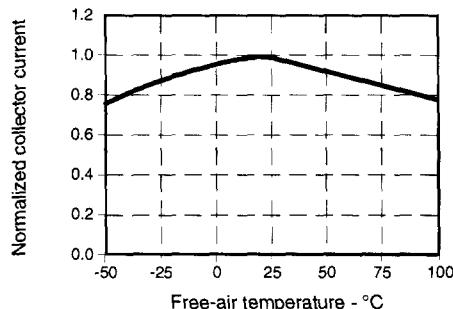

All Performance Curves Show Typical Values

### PART NUMBER GUIDE

#### HOA08XX-XXX

##### Housing Material

- 6 = Polysulfone, IR transmissive
- 7 = Polysulfone, opaque

##### Mechanical and Electrical Specifications

- 0 = Electrical Parameter A/lead spacing .320 in. (8.13 mm)
- 1 = Electrical Parameter B/lead spacing .320 in. (8.13 mm)
- 2 = Electrical Parameter C/lead spacing .320 in. (8.13 mm)
- 5 = Electrical Parameter A/lead spacing .220 in. (5.59 mm)
- 6 = Electrical Parameter B/lead spacing .220 in. (5.59 mm)
- 7 = Electrical Parameter C/lead spacing .220 in. (5.59 mm)

\*0.010 in. (.25 mm) aperture available  
with electrical Parameter A only

##### Aperture Width In Front Of Detector

- \*1 = 0.010 in. (0.25 mm)
- 5 = 0.050 in. (1.27 mm)
- Aperture length is 0.060 in. (1.52 mm)

##### Aperture Width In Front Of IRED

- 5 = 0.050 in. (1.27 mm)
- Aperture length is 0.060 in. (1.52 mm)

##### Mounting Configuration

- L = Single mounting tab, emitter side
- N = No mounting tabs
- P = Single mounting tab, detector side
- T = Two mounting tabs