


## IPAD™ integrated low pass filter with ESD protection for BroadR Reach™ interface in automotive


Datasheet - production data

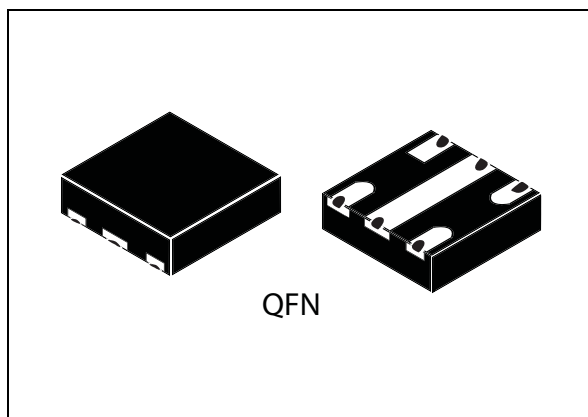

### Description

The EMIF02-01OABRY is a highly integrated solution designed to suppress EMI noise in BroadR Reach™ interfaces in automotive applications. This low pass filter includes a 15 kV ISO10605 protection and is housed in a 3 x 3 mm<sup>2</sup> wettable flanks QFN.

Figure 1. EMIF02-01OABRY equivalent circuit

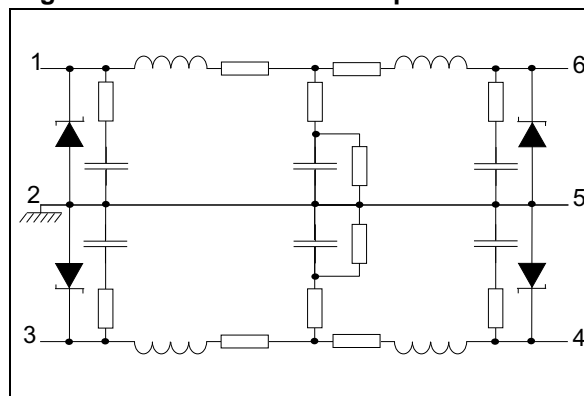

### Features

- Attenuation profile compliant with BroadR Reach™ requirements from -40 °C to 125 °C
- Return loss ( $S_{dd11}$ ) at 60 MHz: -20dB
- Components matching: 1% (between line 1 and 2)
- Package:
  - Dimensions: 3.0 x 3.0 mm
  - Pitch: 1.1 μm
  - Wettable flank QFN
- AEC-Q101 compliant

### Complies with the following standards

- IEC 61000-4-2 exceeds level 4 (330 Ω / 150 pF):
  - 15 kV (air discharge)
  - 15 kV (contact discharge)
- ISO 10605 (330 Ω / 330 pF):
  - 15 kV (air discharge)
  - 15kV (contact discharge)
- ISO 7637-3:
  - Pulse 3a: -150 V
  - Pulse 3b: +100 V

TM: IPAD is a trademark of STMicroelectronics.

# 1 Characteristics

**Table 1. Absolute ratings ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

Symbol	Parameter and test conditions	Value	Unit
$V_{PP}$	External pins (pin1 and pin3): IEC 61000-4-2 (330 $\Omega$ / 150 pF) air discharge contact discharge	15 15	kV
	External pins (pin1 and pin3): ISO 10605 (330 $\Omega$ / 330 pF) air discharge contact discharge	15 15	
$V_{PP}$	Transceiver side pins: HBM (pin4 and pin6)	2	kV
$T_L$	Maximum lead temperature for soldering 10 s	260	$^{\circ}\text{C}$
$T_{op}$	Operating junction temperature range	- 40 to + 125	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature range	- 55 to + 150	$^{\circ}\text{C}$

**Table 2. Electrical characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

Symbol	Conditions	Min.	Typ.	Max.	Unit
$V_{BR}$	Internal protection avalanche	6			V
$S_{dd11}$	From 10 MHz to 60 MHz, $T_j = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$			-20	dB

**Figure 2. BroadReach application schematic**

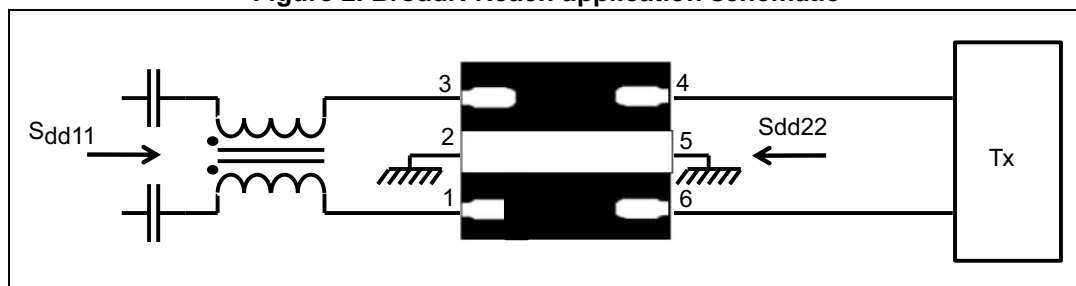


Figure 3.  $S_{dd11}$  attenuation curve (typical values)-external pins


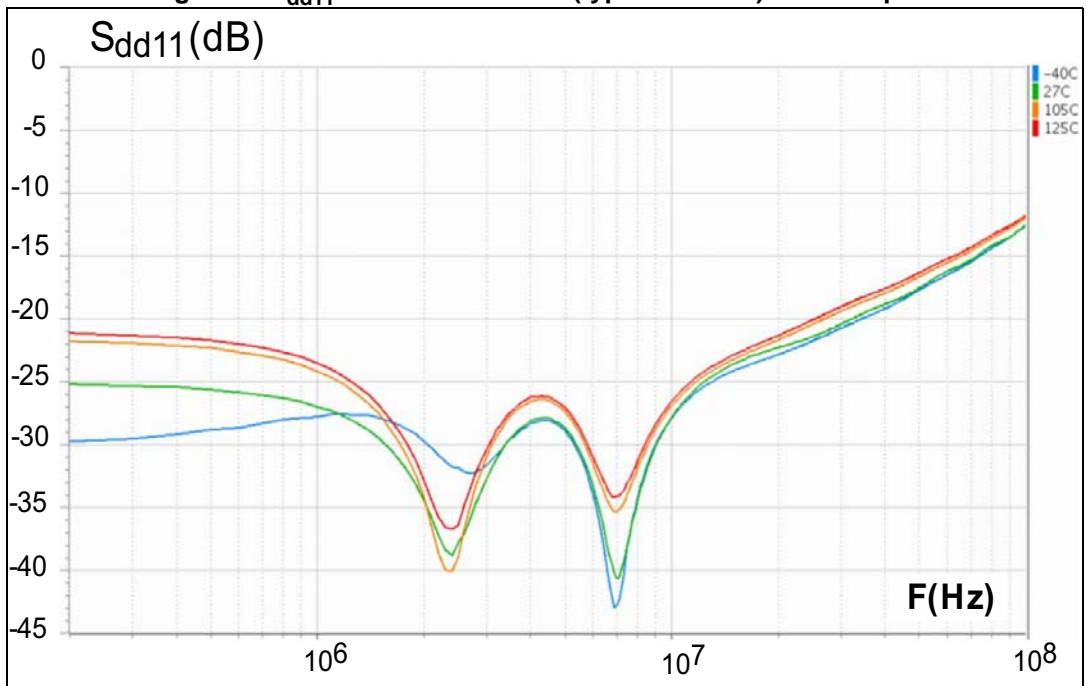


Figure 4.  $S_{dd21}$  attenuation curve (typical values)

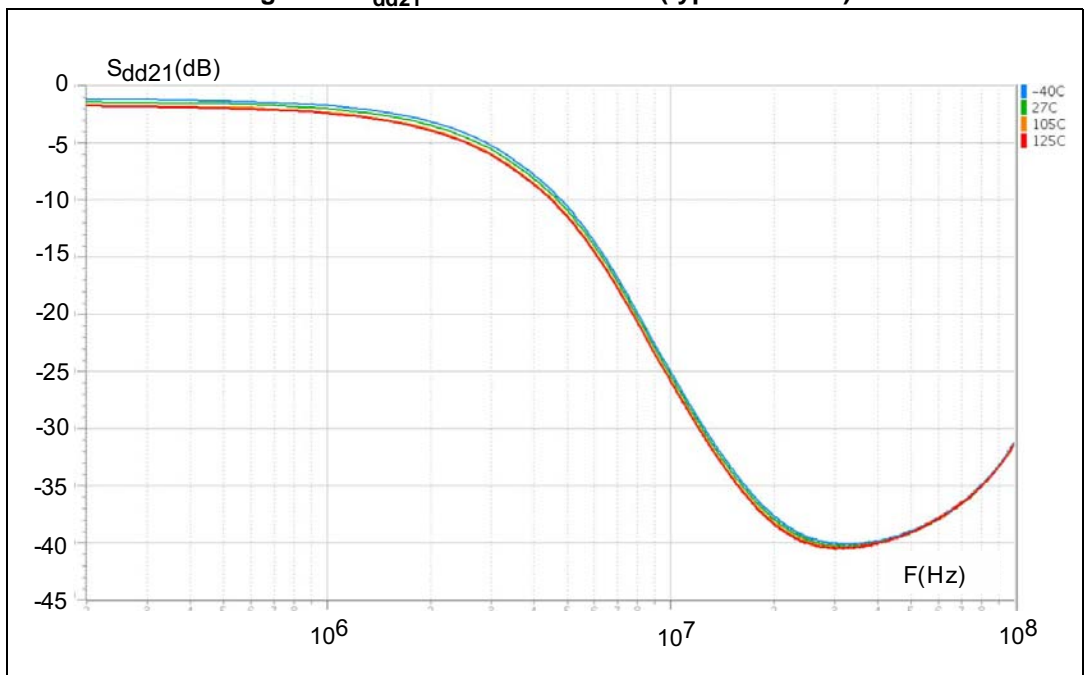

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 QFN package information

Figure 5. QFN package outline

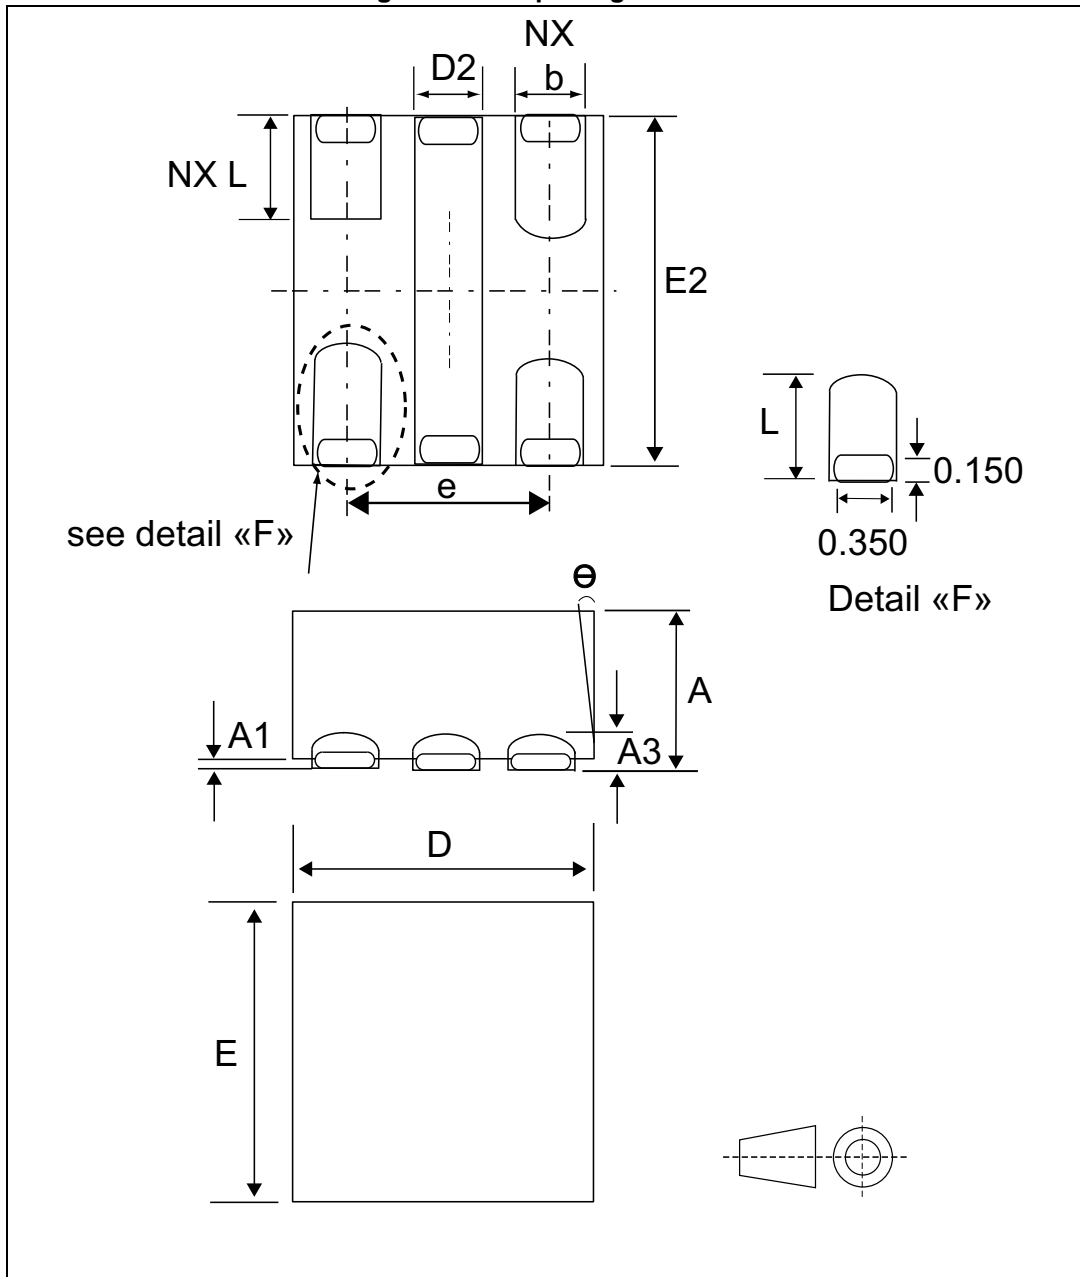


Table 3. QFN package mechanical data

Ref.	Dimensions					
	Millimeters			Inches <sup>(1)</sup>		
	Typ.	Min.	Max.	Typ.	Min.	Max.
A	0.80		0.90	0.031		0.035
A1	0.00		0.05	0.000		0.002
A3		0.203			0.008	
Θ	0°		12°	0°		12°
b	0.45		0.55	0.018		0.022
D	2.95		3.05	0.116		0.120
E	2.95		3.05	0.116		0.120
e		2.21			0.88	
L	0.85		0.95	0.33		0.37
N		6			0.236	
D2	0.60		0.80	0.024		0.031
E2	2.90		3.10	0.114		0.122

1. Values in inches are converted from mm and rounded to 4 decimal digits.


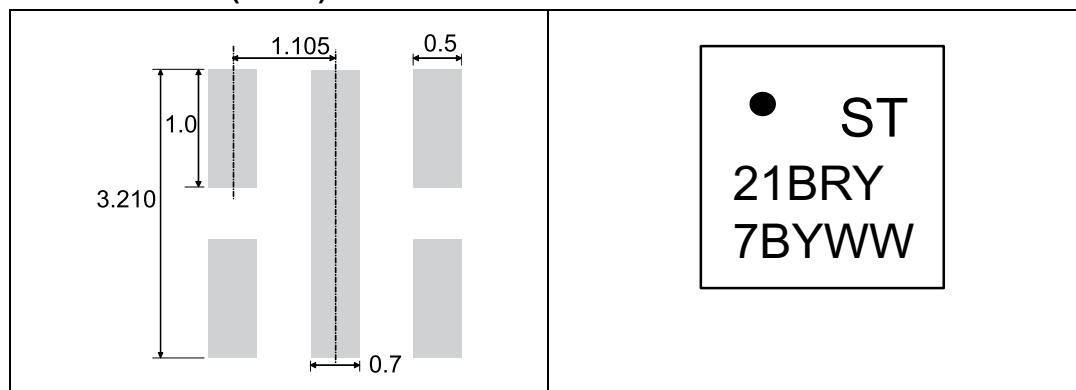
Figure 6. Footprint recommendations  
(in mm)


Figure 7. Marking



### 3 Recommendation on PCB assembly

#### 3.1 Reflow profile

Figure 8. ST ECOPACK<sup>®</sup> recommended soldering reflow profile for PCB mounting

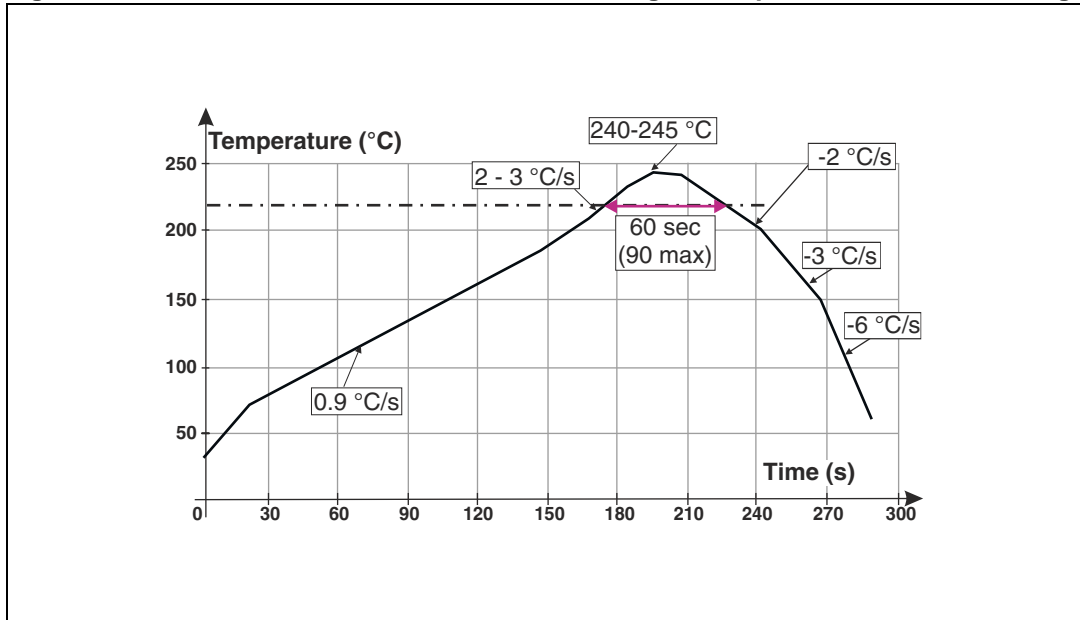

Note: Minimize air convection currents in the reflow oven to avoid component movement.

## 4 Ordering information

Figure 9. Ordering information scheme

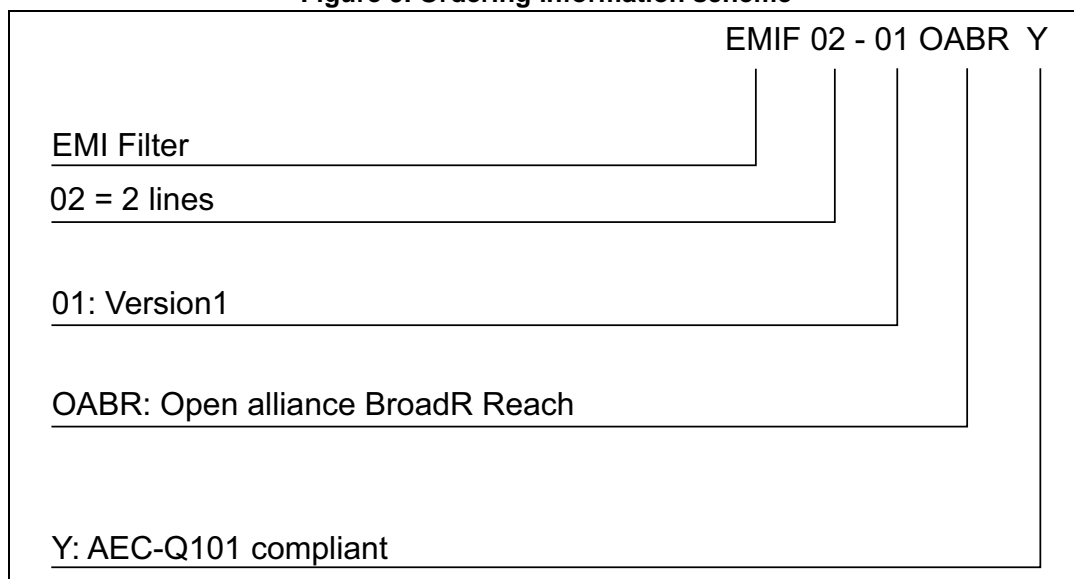


Table 4. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
EMIF02-01OABRY	21BRY	QFN-(wetable flank)	1.935 mg	3000	Tape and reel

## 5 Revision history

Table 5. Document revision history

Date	Revision	Changes
01-Sep-2015	1	Initial release

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved