# **D** Series

# High Voltage relays 10kV & 15kV



Very high isolation voltages, up to 15kV, are achieved through the use of high vacuum reed switches with either Rhodium or Tungsten contacts and make these relays suitable for high reliability applications, such as cardiac defibrillators, test equipment and high voltage power supplies.

The Rhodium contact relays have low contact resistance, while the Tungsten contact relays can switch higher voltages.

PCB or Panel Mount, via Nylon studs, versions are available.

Connection options, for the HV, include PCB, solder turret(wire wrap), flying lead and 0.25" spade terminals.

- 10kV or 15kV Isolation
- Low Contact Resistance
- PCB or Panel Mount
- HV connections via Flying Leads, Solder Turret (wire wrap), or 1/4" Spade Terminals
- Excellent AC characteristics

<b>Contact Specification</b>	Unit Condition	10kV S	10kV SPNO		kV SPNC	15kV SPNO	
Contact Material Isolation across contact Switching Power Max. Switching Voltage Max. Switching Current Max. Carry Current Max Capacitance across contacts Lifetime operations	V V DC or AC peak A DC or AC peak A DC or AC peak pF coil to screen grounded s dry switching 50W switching	10 50 1000 3 4 <0.2	Tunsten 10 50 7000 2 3 <0.2 10° 10°	10 50 1000 3 4 <0.2 10 <sup>9</sup> 10 <sup>6</sup>	um Tungsten 10 50 7000 2 3 <0.2 10 9 10 6	Tungsten 15 50 10000 2 2 <0.2  10° 106	
Contact Resistance	$m\Omega$ max (typical)	50 (15			5) 250(100)	250 (100)	
Insulation Resistance	Ωmin (typical)	10 <sup>10</sup> (1	12V 24V	5V	(10 <sup>13</sup> )	10 <sup>10</sup> (10 <sup>13</sup> ) 5V 12V	24V
Coil Specification		υV	120 240	υV	120 240	30 120	Z4V
Must Operate Voltage Must Release Voltage Operate Time Release Time Resistance	$\begin{array}{ccc} V & DC \\ V & DC \\ ms & diode fitted \\ ms & diode fitted \\ \Omega \end{array}$	3.7 0.5 3.0 2.0 28	9 20 1.25 4 3.0 3.0 2.0 2.0 150 780	3.0	1.25 4 2.0 2.0	3.7 9 0.5 1.25 3.0 3.0 2.0 2.0 16 95	20 4 3.0 2.0 350
Relay Specification							
Isolation contact/coil Insulation resistance co to all terminals	kV ontact Ωmin (typical)	1010 (1	17 0 <sup>13</sup> )		17 10 <sup>10</sup> (10 <sup>13</sup> )	17 10 <sup>10</sup> (10 <sup>13</sup> )	
Envirnonmental Operating Temp range	°C	-20 to	+70		-20 to +70	-20 to +70	

## **Part Numbering System**

Reed Switch Size
Contact Form A=n/o, B=n/c
Contact Material
R=Rhodium,
T=Tungsten
Moulding Ref. No.
Coil Voltage
05=5Vdc, 12=12Vdc,
24=24Vdc
Isolation between
Contacts
10=10kV, 15=15kV

**Mounting or Connection Style** 

No suffix indicates PCB mount F=PCB mount & coil connection with Flying lead HV connection P=Panel mount with wire wrap terminals S=PCB mount & coil connection with stud fixing & 1/4" spade HV connection (not available on 15kV models)

T=PCB mount & coil connection with stud fixing & wire wrap HV connection

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE Telephone +44 (0) 1202 897969 Email:sales@cynergy3.com

ISO9001 CERTIFIED


D 2016

www.cynergy3.com




### **MECHANICAL**



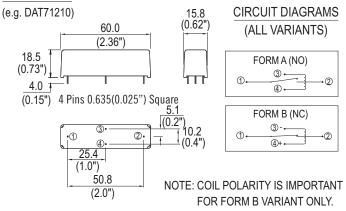


#### PANEL MOUNT

(e.g. DAT71210P)

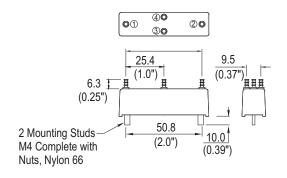


#### **FLYING LEAD**

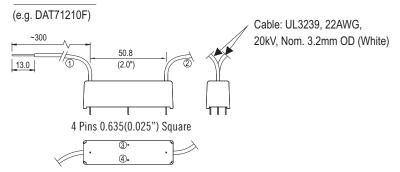

NOTE: PINS WHICH ARE NOT NUMBERED HAVE NO ELECTRICAL CONNECTION.

## **TURRET (Wire Wrap)**

(e.g. DAT71210T)




NOTE: PINS WHICH ARE NOT NUMBERED HAVE NO ELECTRICAL CONNECTION.

#### **SPADE TYPE**

(e.g. DAT71210S)

'S' Suffix denotes the 0.250" 'Push On' blade connectors, M4 fixing bolts and Epoxy potting.

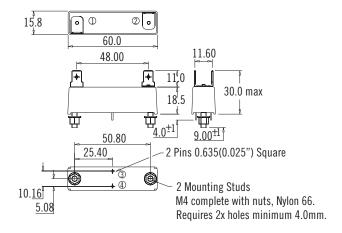

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

www.cynergy3.com