



## Main

Commercial Status	Commercialised
Range of product	Phaseo
Product or component type	Power supply
Power supply type	Regulated switch mode
Input voltage	200...500 V AC phase to phase, terminal(s): L1-L2 100...120 V AC single phase, terminal(s): N-L1
Output voltage	24 V DC
Rated power in W	72 W
PFC filter	With PFC filter conforming to IEC 61000-3-2
Power supply output current	3 A
Output protection type	Thermal, protection technology: automatic reset Against undervoltage, protection technology: tripping if $U < 21.6$ V Against short-circuits, protection technology: manual or automatic reset Against overvoltage, protection technology: 30...32 V, manual reset Against overload, protection technology: manual or automatic reset

## Complementary

Input voltage limits	170...550 V 85...132 V
Network frequency	47...63 Hz
Inrush current	$\leq 30$ A for 2 ms
Cos phi	0.59 at 120 V 0.51 at 240 V
Efficiency	87...100 %
Output voltage limits	24...28.8 V adjustable
Power dissipation in W	7.8 W
Line and load regulation	1...3 %
Holding time	$\geq 40$ ms at 240 V $\geq 20$ ms at 100 V $\geq 120$ ms at 400 V
Permissible temporary current boost	1.5 x $I_n$ for 4 s
Connections - terminals	Screw type terminals for output ground connection, connection capacity: 1 x 0.5...1 x 4 mm <sup>2</sup> AWG gauge22...12 Screw type terminals for output connection, connection capacity: 4 x 0.5...4 x 4 mm <sup>2</sup> AWG gauge22...12 Screw type terminals for input ground connection, connection capacity: 1 x 0.5...1 x 4 mm <sup>2</sup> AWG gauge22...12 Screw type terminals for input connection, connection capacity: 3 x 0.5...3 x 4 mm <sup>2</sup> AWG gauge22...12
Marking	CE
Mounting support	35 x 15 mm symmetrical DIN rail 35 x 7.5 mm symmetrical DIN rail
Operating position	Vertical
Output coupling	Parallel Series

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Name of test	Harmonic current emission conforming to EN/IEC 61000-3-2 Surge conforming to EN/IEC 61000-4-5 Rapid transient conforming to IEC 61000-4-4 Radiated emissions conforming to EN 55022 Class B Radiated electromagnetic field conforming to EN/IEC 61000-4-3 Primary outage conforming to IEC 61000-4-11 Magnetic field conforming to EN 61000-4-8 Induced electromagnetic field conforming to EN/IEC 61000-4-6 Electrostatic discharges conforming to EN/IEC 61000-4-2 Conducted emissions on the power line conforming to EN 55022 Class B
Status LED	1 LED green, red and orange for output current 1 LED green and red for output voltage
Depth	155 mm
Height	143 mm
Width	165 mm
Product weight	0.3 kg

## Environment


Product certifications	CCSAus C-Tick UL
Environmental characteristic	Safety conforming to SELV Safety conforming to EN/IEC 61204-3 Safety conforming to EN/IEC 60950-1 EMC conforming to EN/IEC 61204-3 EMC conforming to EN/IEC 61000-6-4 EMC conforming to EN/IEC 61000-6-2 EMC conforming to EN 61000-6-3 EMC conforming to EN 61000-6-1
IP degree of protection	IP20 conforming to EN/IEC 60529
Ambient air temperature for storage	-40...70 °C
Relative humidity	0...95 % in storage 0...90 % during operation
Class of protection against electric shock	Class I conforming to VDE 0106-1
Dielectric strength	500 V between output and ground 4000 V between input and output 3500 V between input and ground

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS	Compliant - since 0501 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available <a href="#">Download End Of Life Manual</a>

Regulated Switch Mode Power Supplies


Dimensions

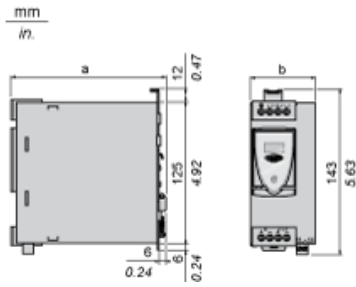

ABL 8	a in mm	a in in.	b in mm	b in in.
RPS24030	120	4.72	44	1.73
RPS24050	120	4.72	56	2.20
RPS24100	140	5.51	85	3.34
RPM24200	140	5.51	145	5.70
WPS24200	155	6.10	95	3.74
WPS24400	155	6.10	165	6.49

Regulated Switch Mode Power Supply


Internal Wiring Diagram




Regulated Switch Mode Power Supply

Line Supply Wiring Diagram


Single-phase (L-N) 100 to 120 V



Phase-to-phase (L1-L2) 200 to 500 V




Single-phase (L-N) 200 to 500 V



Regulated Switch Mode Power Supplies


Series or Parallel Connection

Series Connection

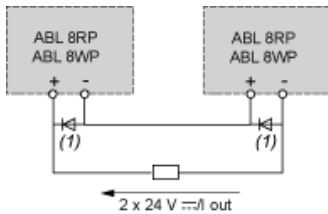

(1) Two Schottky diodes  $I_{min}$  = power supply In and  $V_{min}$  = 50 V

Parallel Connection

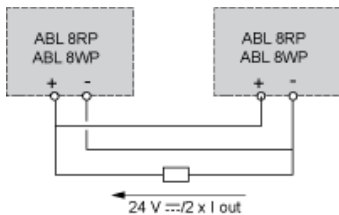

Family	Series	Parallel
ABL 8RPS/8RPM/8WPS	2 products max. (1)	2 products max.

Series or parallel connection is only recommended for products with identical references.

For better availability, the power supplies can also be connected in parallel using the ABL8RED24400 Redundancy module.


Regulated Switch Mode Power Supplies

Derating

The ambient temperature is a determining factor that limits the power an electronic power supply can deliver continuously. If the temperature around the electronic components is too high, their life will be significantly reduced.

The nominal ambient temperature for the Universal range of Phaseo power supplies is 50°C. Above this temperature, derating is necessary up to a maximum temperature of 60°C.

The graph below shows the power (in relation to the nominal power) that the power supply can deliver continuously, depending on the ambient temperature.

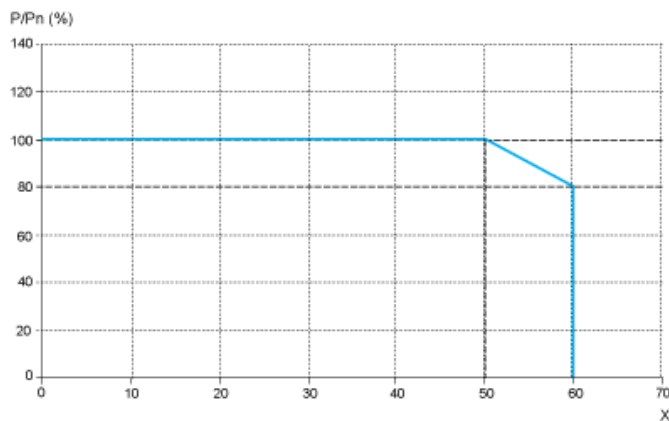

X Maximum operating temperature (°C)

ABL 8RPM, ABL 8RPS, ABL 8WPS mounted vertically


Derating should be considered in extreme operating conditions:

- Intensive operation (output current permanently close to the nominal current, combined with a high ambient temperature)
- Output voltage set above 24 Vdc (to compensate for line voltage drops, for example)
- Parallel connection to increase the total power

Regulated Switch Mode Power Supply


Load Limit

Manual Reset Protection Mode

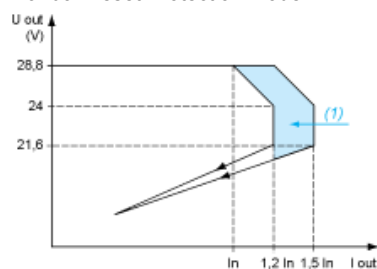


(1) Boost 4s

Automatic Reset Protection Mode

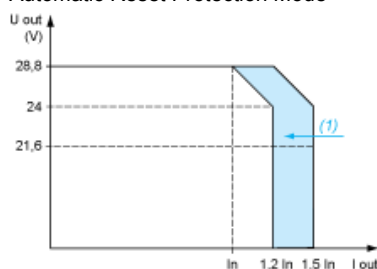

(1) Boost 4s

### "Boost" Repeat Accuracy

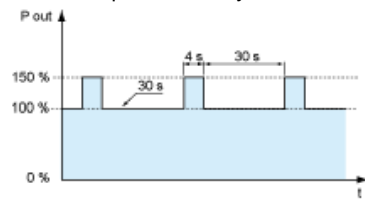

This type of operation is described in detail in the user manual, which can be downloaded from the website.