



VANDAL RESISTANT

# CIS2 Series

INTERCOM ASSEMBLY

3-Gang Call-In Station, Vandal Resistant, Stainless Steel

## GENERAL DESCRIPTION

The **CIS2 Series** is a 3-gang, vandal resistant call-in station with integrated speaker/microphone consisting of a 3" square frame loudspeaker with a 2.35 oz. ceramic magnet and a phenolic impregnated, moisture resistant cone - a 1W-25V transformer, and a momentary (normally open) push-to-call button.

Three (3) interwoven, steel security screens are mounted between the 12 guage brushed stainless steel faceplate and loudspeaker. Tamper resistant, 6-32 x 1" 'pin-in-torx' hardware included.

## MODELS AVAILABLE

CIS2/8	8 Ohm Speaker
CIS2/25	1W-25V, 3-Tap Transformer (1W, 0.5W, 0.25W)
CIS2/45	45 Ohm Speaker

## INTENDED USE - Indoor or Protected Outdoor Environment

Program Material | Signal Tones and Voice




## AUDIO SPECIFICATIONS

Average Sensitivity	87 dB SPL, 1W/ 1M
Magnet Type & Weight	BeFe Ceramic, 2.35 oz. Nominal
Frequency Response	150 Hz - 10 kHz EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	25V: 7" Color-Coded Leads, Pre-Cut 8 & 45 Ohm: 0.205' Spade Terminal

## RECOMMENDED QUAM COMPONENTS

Enclosures | Surface Mount : SE3GVP, SE10GVP

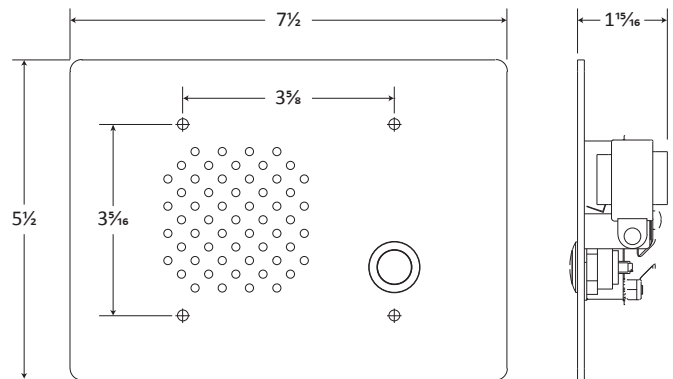

CIS2/25 SHOWN

<p>Recommended construction sequences, installation instructions, and A&amp;E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at: <a href="http://www.QuamSpeakers.com">www.QuamSpeakers.com</a></p>				<p>QUAM-NICHOLS COMPANY, INC. 234 East Marquette Rd. Chicago, IL. 60637 Tel: 1-800-NEED-NOW (800-633-3669) Fax: 1-888-NEED-NOW (888-633-3669) e-mail: NeedNow@QNC.com <a href="http://www.QuamSpeakers.com">www.QuamSpeakers.com</a></p>
<p>© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.</p>				