

LPR Series

PCB Snap-In Large Capacitors



Features:

- LPR series large size capacitors with the specially designed "self-standing" terminals can be directly soldered to printed circuit boards without holders.
- Easy fixing to PCBs without need for holders.
- General purpose snap-in aluminium electrolytic.

Specifications

No.	Item	Performance																																	
1	Operating Temperature Range	-40 to +85°C	-25 to +85°C																																
2	Rated Working Voltage Range	16 to 100V dc	400V dc																																
3	Nominal Capacitance Range	1000 to 22,000µF	47 to 470µF																																
4	Capacitance Tolerance	±20% (at +20°C, 120Hz).																																	
5	Leakage Current	$I = 0.02CV$ or 3000µA maximum, Whichever is greater after 3 minutes. I: Leakage Current (µA). C: Rated Capacitance (µF). V: Working Voltage (V).																																	
6	Dissipation Factor (tanδ) (120Hz\+20°C)	<table border="1"> <thead> <tr> <th>µF \ W. V</th> <th>16</th> <th>25-35</th> <th>50-63</th> <th>100</th> <th>400</th> </tr> </thead> <tbody> <tr> <td>47 - 220</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>0.20</td> </tr> <tr> <td>470 - 2200</td> <td>0.25</td> <td colspan="3">0.20</td> <td>-</td> </tr> <tr> <td>4700 - 6800</td> <td>0.35</td> <td colspan="2">0.30</td> <td>0.25</td> <td>-</td> </tr> <tr> <td>10,000 - 22,000</td> <td>0.40</td> <td>0.35</td> <td>0.30</td> <td>-</td> <td>-</td> </tr> </tbody> </table>				µF \ W. V	16	25-35	50-63	100	400	47 - 220	-	-	-	-	0.20	470 - 2200	0.25	0.20			-	4700 - 6800	0.35	0.30		0.25	-	10,000 - 22,000	0.40	0.35	0.30	-	-
µF \ W. V	16	25-35	50-63	100	400																														
47 - 220	-	-	-	-	0.20																														
470 - 2200	0.25	0.20			-																														
4700 - 6800	0.35	0.30		0.25	-																														
10,000 - 22,000	0.40	0.35	0.30	-	-																														
		Less than the value under table.																																	
7	Characteristics at low temperature (stability at 120Hz)	Impedance ratio at 100Hz $Z_{-25°C} / Z_{20°C}$: 3 maximum $Z_{-40°C} / Z_{20°C}$: 12 maximum																																	

Specifications


No.	Item	Performance																																			
8	Ripple Current	<p>Correction factor for frequency</p> <table border="1"> <thead> <tr> <th>Ambient Temperature</th> <th>Multiplying Factor</th> </tr> </thead> <tbody> <tr> <td>45°C and under</td> <td>1.55</td> </tr> <tr> <td>60°C</td> <td>1.30</td> </tr> <tr> <td>70°C</td> <td>1.20</td> </tr> <tr> <td>85°C</td> <td>1.00</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th rowspan="2">Frequency</th> <th colspan="3">Multiplying Factor</th> </tr> <tr> <th>16 - 35V</th> <th>50 - 100V</th> <th>400V</th> </tr> </thead> <tbody> <tr> <td>60Hz</td> <td colspan="3">0.90</td> </tr> <tr> <td>120Hz</td> <td colspan="3">1.00</td> </tr> <tr> <td>1kHz</td> <td>1.05</td> <td>1.15</td> <td>1.30</td> </tr> <tr> <td>10kHz</td> <td rowspan="2">1.10</td> <td rowspan="2">1.20</td> <td>1.40</td> </tr> <tr> <td>100kHz</td> <td>1.45</td> </tr> </tbody> </table>	Ambient Temperature	Multiplying Factor	45°C and under	1.55	60°C	1.30	70°C	1.20	85°C	1.00	Frequency	Multiplying Factor			16 - 35V	50 - 100V	400V	60Hz	0.90			120Hz	1.00			1kHz	1.05	1.15	1.30	10kHz	1.10	1.20	1.40	100kHz	1.45
Ambient Temperature	Multiplying Factor																																				
45°C and under	1.55																																				
60°C	1.30																																				
70°C	1.20																																				
85°C	1.00																																				
Frequency	Multiplying Factor																																				
	16 - 35V	50 - 100V	400V																																		
60Hz	0.90																																				
120Hz	1.00																																				
1kHz	1.05	1.15	1.30																																		
10kHz	1.10	1.20	1.40																																		
100kHz			1.45																																		
9	High Temperature Loading	<p>After 2000 hours application of DC rated working voltage at +85°C, The capacitor shall meet the following limits: Post test requirements at +20°C.</p> <table border="1"> <tbody> <tr> <td>Leakage current</td> <td>≤the Initial specified value</td> </tr> <tr> <td>Capacitance change</td> <td>≤±20% of initial measured value</td> </tr> <tr> <td>Dissipation Factor (tanδ)</td> <td>≤200% of initial specified value</td> </tr> </tbody> </table>	Leakage current	≤the Initial specified value	Capacitance change	≤±20% of initial measured value	Dissipation Factor (tanδ)	≤200% of initial specified value																													
Leakage current	≤the Initial specified value																																				
Capacitance change	≤±20% of initial measured value																																				
Dissipation Factor (tanδ)	≤200% of initial specified value																																				
10	Shelf Life	<p>After 500 hours application of DC rated working voltage at +85°C, The capacitor shall meet the following limits: Post test requirements at +20°C.</p> <table border="1"> <tbody> <tr> <td>Leakage current</td> <td>≤the Initial specified value</td> </tr> <tr> <td>Capacitance change</td> <td>≤±20% of initial measured value</td> </tr> <tr> <td>Dissipation Factor (tanδ)</td> <td>≤150% of initial specified value</td> </tr> </tbody> </table>	Leakage current	≤the Initial specified value	Capacitance change	≤±20% of initial measured value	Dissipation Factor (tanδ)	≤150% of initial specified value																													
Leakage current	≤the Initial specified value																																				
Capacitance change	≤±20% of initial measured value																																				
Dissipation Factor (tanδ)	≤150% of initial specified value																																				

LPR Series

PCB Snap-In Large Capacitors



Diagram of Dimensions

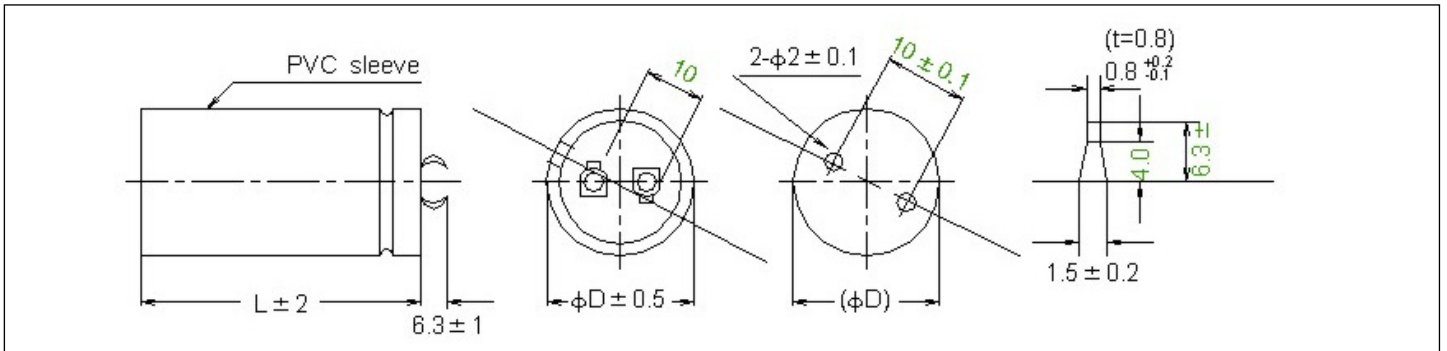

Case Size Table & Permissible Ripple Current

R.C. (Ripple Current) (A): At 120Hz, 85°C

Working Voltage	Capacitance (µF)	Case Size (Diameter x Height)	Ripple Current	Part Number
16 (20)	4700	22 x 25	2.3	MCLPR16V478M22X25
	10,000		3.32	MCLPR16V109M22X25
	15,000	22 x 35	4.29	MCLPR16V159M22X35
25 (32)	4700	22 x 25	2.5	MCLPR25V478M22X25
	6800	22 x 30	3.06	MCLPR25V688M22X30
	10,000	30 x 25	3.99	MCLPR25V109M30X25
	15,000	30 x 35	5.1	MCLPR25V159M30X35
	22,000	30 x 45	6.22	MCLPR25V229M30X45
35 (44)	2200	22 x 25	1.8	MCLPR35V228M22X25
	4700	22 x 30	3.06	MCLPR35V478M22X30
	6800	26 x 30	3.57	MCLPR35V688M26X30
	10,000	30 x 30	4.58	MCLPR35V109M30X30
	22,000	35 x 45	7.07	MCLPR35V229M35X45
50 (63)	2200	22 x 25	2.3	MCLPR50V228M22X25
	4700	30 x 25	3.86	MCLPR50V478M30X25
	10,000	35 x 35	5.97	MCLPR50V109M35X35
63 (79)	2200	26 x 25	2.58	MCLPR63V228M26X25
	4700	26 x 40	4.19	MCLPR63V478M26X40
	6800	30 x 40	5.16	MCLPR63V688M30X40
	10,000	30 x 50	6.32	MCLPR63V109M30X50
100 (125)	1000	22 x 30	2.3	MCLPR100V108M22X30
	2200	26 x 40	3.74	MCLPR100V228M26X40
	4700	30 x 50	5.86	MCLPR100V478M30X50
400	47	22 x 25	0.4	MCLPR400V476M22X25
	100	22 x 30	0.78	MCLPR400V107M22X30
	220	26 x 40	1.41	MCLPR400V227M26X40
	470	35 x 40	2.4	MCLPR400V477M35X40

Dimensions : Millimetres



LPR Series

PCB Snap-In Large Capacitors



Part Number Explanation:

MCLPR

Type

16V

Voltage

107

Capacitance

M

Tolerance

22X25

Case Size

Voltage

: 16, 25, 35, 50, 63, 100 and 400V.

Capacitance (μF)

: First two digits are the base value and last digit represents the numbers of zeros to follow.

Last digit 7 represents one zero in base value,

in code 107, Capacitance is 100, similarly for 227 capacitance is 220.

Last digit 8 represents two zero in base value,

in code 228, Capacitance is 2,200, similarly for 688 capacitance is 6800.

Last digit 6 represents no change in base value,

in code 476, capacitance value is 47.

Tolerance

: M = $\pm 20\%$.

Case Size

: Diameter x Height.

LPR Series

PCB Snap-In Large Capacitors



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

