Adapter SMA Plug to SSMB Plug





Specifications:

Connector Type : Adapter Series : SSMB

Body Style : Straight Adapter, Plug-Plug

Convert From Connector : SMA Coaxial

Convert From Gender : Plug

Convert To Connector : SSMB Coaxial

Convert To Gender : Plug
Frequency Max : 12.4GHz
Body Plating : Gold
Connector Type A : SMA Plug
Connector Type B : SSMB Plug
Contact Material : Beryllium Copper

 Impedance
 : 50Ω

 Insulation Resistance
 : 1,000MΩ

 Insulator Material
 : PTFE

 Material
 : Brass

 No. of Mating Cycles
 : 500

 Operating Frequency Max
 : 12.4GHz


 Operating Temperature
 : -65°C to +165°C

VSWR : 1.3 Voltage Rating : 250V AC Withstand Voltage : 500V



Adapter SMA Plug to SSMB Plug



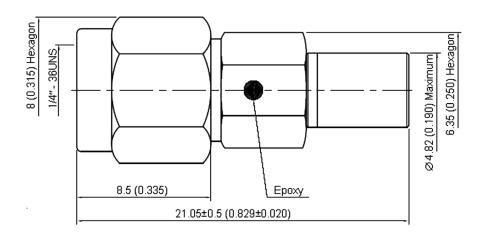

Dimensions: Millimetres (Inches)

Number	Description	Material	Finish
1	Shell I	Brass	Gold 3μ" Min.
2	Gasket	Silicone	Red
3	Washer	Stainless Steel	None
4	Body	Brass	Gold 3μ" Min.
5	Centre Contact	Beryllium Copper	Gold 50µ" Min.
6	Insulation	PTFE	None
7	Chassis	Beryllium Copper	Cold 2u" Min
8	Shell II	Brass	Gold 3µ" Min.

Part Number Table

Description	Part Number
Adaptor, SMA Plug to SSMB Plug	46-19-TGG

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

