# TV\$5501V10

## Transient Voltage Suppressors

### Features

- Protection for the following IEC Standards: IEC61000-4-2 Level 4: ±30 kV Contact Discharge
  - IEC61000-4-5 (Lightning) 60 A (8/20 μs)
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

### MAXIMUM RATINGS

Rating		Symbol	Value	Unit
IEC 61000-4-2 (ESD)	Contact Air		±30 ±30	kV
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C
Maximum Peak Pulse Current 8/20 $\mu$ s @ T <sub>A</sub> = 25°C		I <sub>PP</sub>	60	A

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



### **ON Semiconductor®**

www.onsemi.com





E = Specific Device Code

M = Date Code

### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
TVS5501V10MUT5G	UDFN2 (Pb-Free)	8000 / Tape & Reel


+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

### **ELECTRICAL CHARACTERISTICS**

 $(T_A = 25^{\circ}C \text{ unless otherwise noted})$ 

Symbol	Parameter	
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current	
V <sub>C</sub>	Clamping Voltage @ IPP	
V <sub>RWM</sub>	Working Peak Reverse Voltage	
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>	
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>	
Ι <sub>Τ</sub>	Test Current	


\*See Application Note AND8308/D for detailed explanations of datasheet parameters.



### **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Reverse Working Voltage	V <sub>RWM</sub>				10	V
Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> = 1 mA	12			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> = 10 V			0.5	μA
Clamping Voltage (Note 1)	V <sub>C</sub>	I <sub>PP</sub> = 10 A			15	V
Clamping Voltage (Note 1)	V <sub>C</sub>	I <sub>PP</sub> = 60 A			20	V
Junction Capacitance	CJ	V <sub>R</sub> = 0 V, f = 1 MHz			400	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 1. Non-repetitive current pulse at  $T_A = 25^{\circ}$ C, per IEC61000–4–5 waveform.

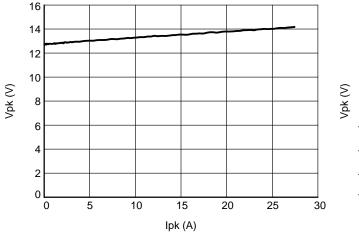






Figure 2. Negative TLP I–V Curve

### TVS5501V10

### IEC 61000-4-2 Spec.

Level	Test Volt- age (kV)	First Peak Current (A)	Current at 30 ns (A)	Current at 60 ns (A)
1	2	7.5	4	2
2	4	15	8	4
3	6	22.5	12	6
4	8	30	16	8




Figure 3. IEC61000-4-2 Spec


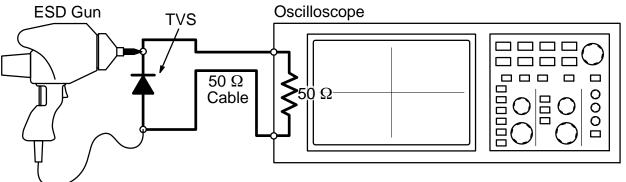


Figure 4. Diagram of ESD Test Setup

### **ESD Voltage Clamping**

For sensitive circuit elements it is important to limit the voltage that an IC will be exposed to during an ESD event to as low a voltage as possible. The ESD clamping voltage is the voltage drop across the ESD protection diode during an ESD event per the IEC61000–4–2 waveform. Since the IEC61000–4–2 was written as a pass/fail spec for larger systems such as cell phones or laptop computers it is not clearly defined in the spec how to specify a clamping voltage


at the device level. ON Semiconductor has developed a way to examine the entire voltage waveform across the ESD protection diode over the time domain of an ESD pulse in the form of an oscilloscope screenshot, which can be found on the datasheets for all ESD protection diodes. For more information on how ON Semiconductor creates these screenshots and how to interpret them please refer to AND8307/D.



### TVS5501V10

### PACKAGE DIMENSIONS

UDFN2 1.6x1.0, 1.1P CASE 517CZ ISSUE B

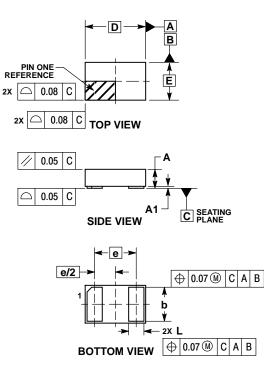


NOTES: 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.

2. CONTROLLING DIMENSION: MILLIMETERS.

r				
		MILLIMETERS		
	DIM	MIN	MAX	
[	Α	0.45	0.55	
	A1		0.05	
- [	b	0.83	0.93	
	D	1.60	BSC	
	Е	1.00 BSC		
[	е	1.10 BSC		
[	L	0.35	0.45	

### RECOMMENDED SOLDERING FOOTPRINT\*



\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdl/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights or the rights of others. ON Semiconductor and its officers, employees, subsidiaries, and distributors harmeds or my such unittended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products frame, such as and or any existing and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death as

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative