


Bridge Rectifier

GBPC Series

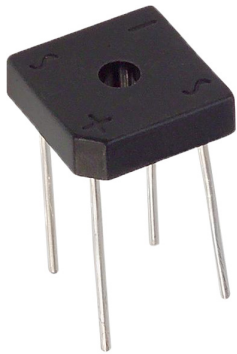

Features:

- Plastic material
- Integrally moulded heatsink provide very low thermal resistance for maximum heat dissipation
- Surge overload ratings from 300 to 400A
- Terminals solderable per MIL-STD-202, method 208 (for wire type)
- Typical I_R less than 0.2 μ A
- High temperature soldering guaranteed : 260°C / 10 seconds 0.375 inches (9.5mm) lead lengths (for wire type)
- Isolated voltage from case to lead over 2,500V

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load, derate current by 20%

Characteristics		Symbol	-01	-02	-04	-06	-08	-10	Units
Max. Recurrent Peak Reverse Voltage		V _{RRM}	100	200	400	600	800	1,000	V
Max. RMS Voltage		V _{RMS}	70	140	280	420	560	700	
Max. DC Blocking Voltage		V _{DC}	100	200	400	600	800	1,000	
Maximum Average Forward Rectified Current at T _C = 55°C	GBPC15 GBPC25 GBPC35	I _(AV)	15 25 35						A
Peak Forward Surge Current, Single Sine-wave Superimposed on Rated Load (JEDEC method)	GBPC15 GBPC25 GBPC35	I _{FSM}	300 300 400						
Maximum Instantaneous Forward Voltage Drop Per Element at Specified Current	GBPC15 7.5 A GBPC25 12.5 A GBPC35 17.5 A	V _F	1.1						V
Maximum DC Reverse Current at Rated DC Blocking Voltage per Element		I _R	5						mA
Typical Thermal Resistance (Note 1)		R _{θJC}	1.5						°C / W
Operating and Storage Temperature Range		T _J , T _{STG}	-50 to +150						°C


Notes: 1. Thermal Resistance from Junction to Case
2. Suffix "W" - Wire Lead Structure

Bridge Rectifier GBPC Series




Ratings and Characteristic Curves


Maximum Forward Current Derating Curve

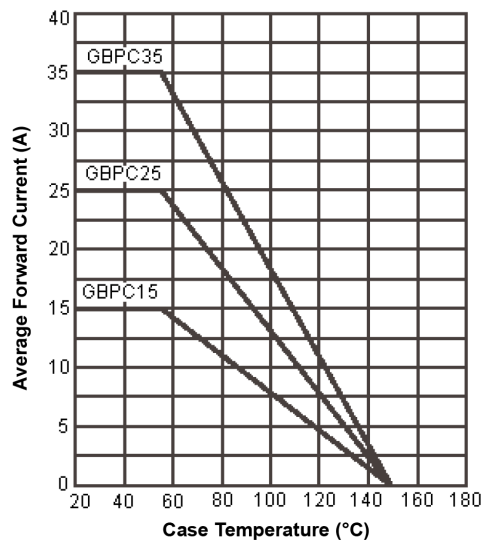


Typical Reverse Characteristics Per Bridge Element

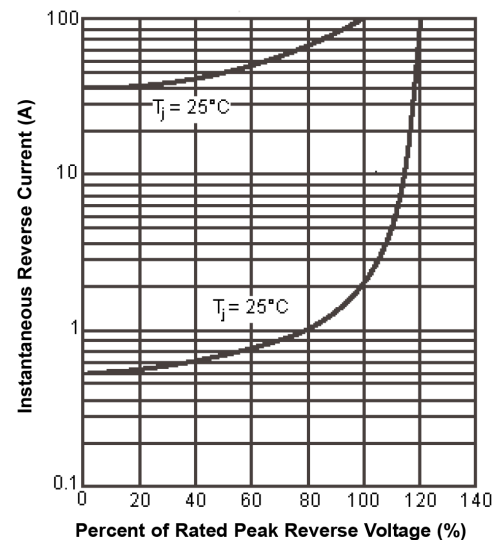


Maximum Non-Repetitive Forward Surge Current Per Bridge Element

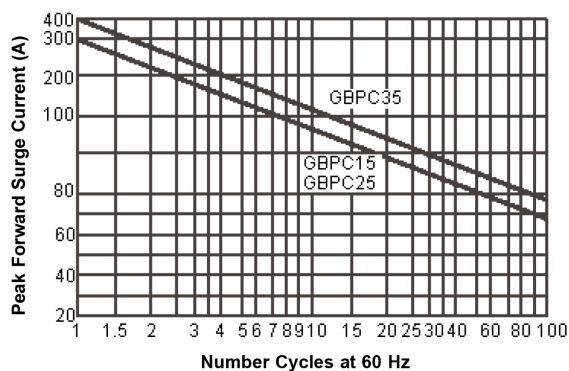

Typical Forward Characteristics Per Bridge Element

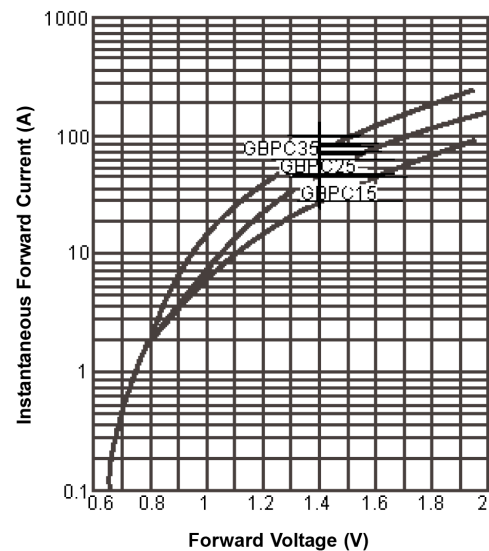

Typical Junction Capacitance


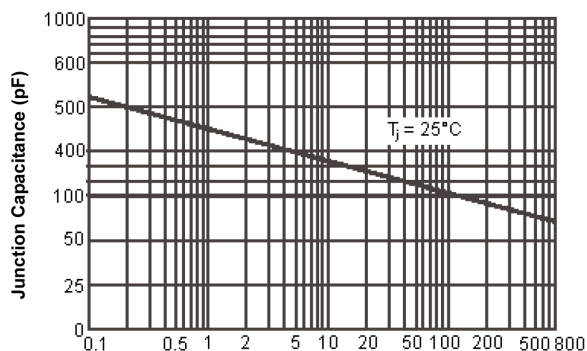


Bridge Rectifier

GBPC Series



Dimensions:

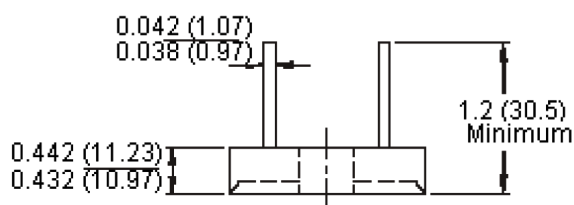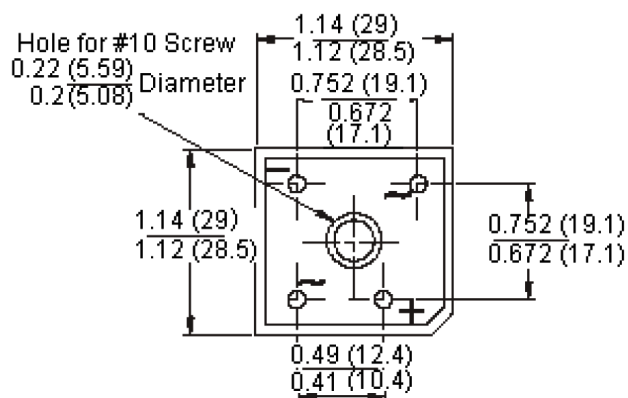

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Bridge Rectifier, 15A, 200V	GBPC1502W+
Bridge Rectifier, 25A, 100V	GBPC2501W+
Bridge Rectifier, 25A, 200V	GBPC2502W+
Bridge Rectifier, 25A, 400V	GBPC2504W+
Bridge Rectifier, 25A, 600V	GBPC2506W+
Bridge Rectifier, 25A, 800V	GBPC2508W+
Bridge Rectifier, 25A, 1,000V	GBPC2510W+
Bridge Rectifier, 35A, 200V	GBPC3502W+
Bridge Rectifier, 35A, 400V	GBPC3504W+
Bridge Rectifier, 35A, 600V	GBPC3506W+
Bridge Rectifier, 35A, 800V	GBPC3508W+
Bridge Rectifier, 35A, 1,000V	GBPC3510W+

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.