


Transient Voltage Suppression Diode

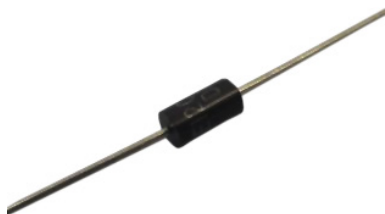

Features:

- Available in Uni-Directional and Bi-Directional
- 500W peak pulse power capability with a 10/1000µs waveform, repetitive rate (duty cycle): 0.01%
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 260°C, 40 seconds

Mechanical Data:

Case	: DO-15
Terminals	: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D
Polarity	: For Uni-Directional types the colour band denotes cathode end, no marking on Bi-Directional types
Power	: 500 Watts

Typical Applications:

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on Ics, MOS-FET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Characteristics	Symbol	Values	Unit
Peak Pulse Power Dissipation by 10 × 1000µs test waveform (Note 1)	P _{PPM}	500	W
Steady State Power Dissipation on infinite heat sink at T _L = 75°C	P _D	3	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Uni-Directional only (Note 2)	I _{FSM}	70	Amps
Maximum Instantaneous Forward Voltage at 35A for Uni-Directional only (Note 3)	V _F	3.5/5	V
Typical Thermal Resistance Junction to Lead	R _{UJL}	20	°C/W
Typical Thermal Resistance Junction	R _{UJA}	75	°C/W
Operating Temperature Range	T _J	-55 to +175	°C
Storage Temperature Range	T _{STG}	-55 to +175	°C

Notes:

1. Non-repetitive current pulse ,per Fig. 3 and derated above T_A = 25°C per Fig. 2.
2. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.
3. V_F < 3.5V for devices of V_{BR} ≤ 200V and V_F < 5.0V for devices of V_{BR} ≥ 201V.

Transient Voltage Suppression Diode



Part Number		Reverse Standoff Voltage	Breakdown Voltage $V_{BR}(V)$ @ I_T		Test Current I_T	Max. Clamping Voltage V_c @ I_{pp}	Max. Peak Pulse Current	Max. Reverse Leakage I_R @ V_R
(UNI)	(BI)	Volts	Min.(V)	A	mA	$V_c(V)$	$I_{pp}(A)$	μA
SA12A+	SA12CA+	12	13.3	14.7	1	19.9	25.6	1
SA15A+	SA15CA+	15	16.7	18.5	1	24.4	20.9	1
-	SA20CA+	20	22.2	24.5	1	32.4	15.7	1
SA22A+	-	22	24.4	26.9	1	35.5	14.4	1
SA24A+	SA24CA+	24	26.7	29.5	1	38.9	13.1	1
	SA28CA+	28	31.1	34.4	1	45.4	11.2	1
SA30A+	SA30CA+	30	33.3	36.8	1	48.4	10.5	1
SA33A+	SA33CA+	33	36.7	40.6	1	53.3	9.6	1

Notes: 1. For bidirectional type having V_R of 10 volts and less, the I_R limit is double.
2. For parts without A, the V_{BR} is $\pm 10\%$.

Ratings and Characteristic Curves

FIG.1 – Peak Pulse Power Rating Curve

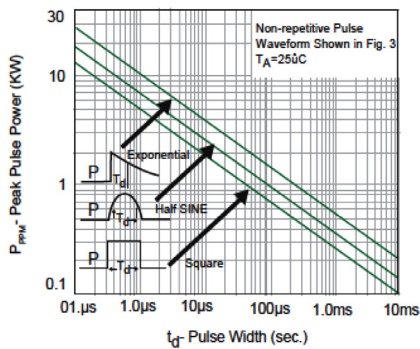


FIG.2 – Pulse Derating Curve

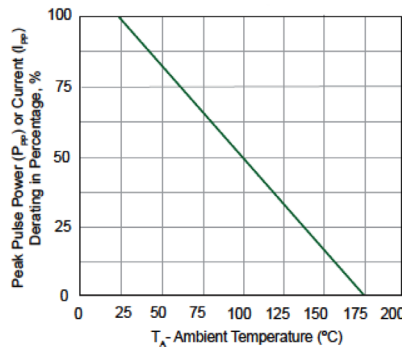


FIG.3 – Pulse Waveform

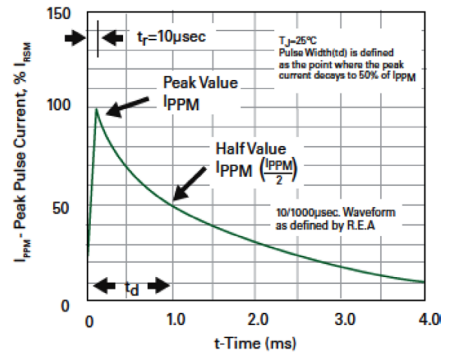


FIG.4 – Typical junction capacitance

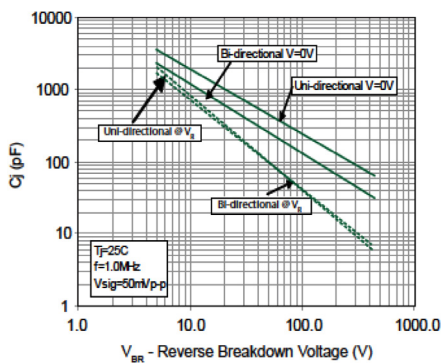


FIG.4 – Steady State Power Dissipation Derating Curve


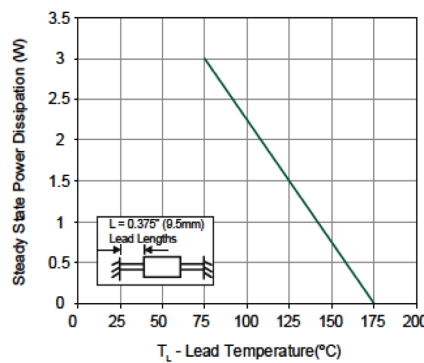



FIG.4 – Max. Non-Repetitive Forward Surge Current Uni-Directional Only



Transient Voltage Suppression Diode

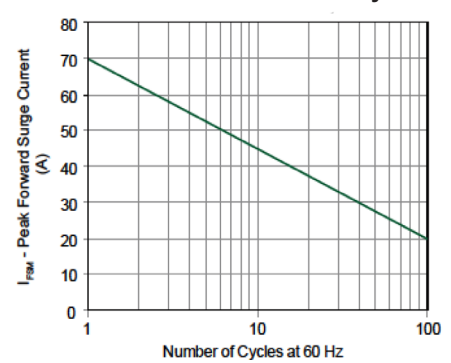

DO-15

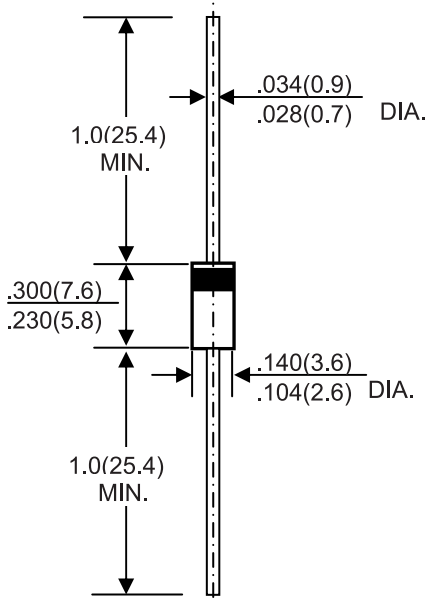

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Transient Voltage Suppression Diode	SA12A+
	SA12CA+
	SA15A+
	SA15CA+
	SA20CA+
	SA22A+
	SA24A+
	SA24CA+
	SA28CA+
	SA30A+
	SA30CA+
	SA33A+
SA33CA+	

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com

