Surface Mount Schottky Barrier Rectifier





Features:

- For surface mounted applications
- · Metal-Semiconductor junction with guarding
- Epitaxial construction
- · Very low forward voltage drop
- · High current capability
- · Plastic material has UL flammability classification 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

Mechanical Data:

Case : Molded Plastic

Polarity : Colour band denotes cathode Weight : 0.007 ounces, 0.64 grams

Reverse Voltage : 60 Volts Forward Current : 3 Amperes

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	Values	Unit
Max. Recurrent Peak Reverse Voltage	Vrrm	60	V
Max. RMS Voltage	VRMS	42	
Max. DC Blocking Voltage	VDC	60	
Max. Average Forward Rectified Current TL= 100°C	l(AV)	3	А
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	İFSM	80	
Peak Forward Voltage at 3A DC	VF	0.7	V
Max. DC Reverse Current at T _J = 25°C Rated DC Blocking Voltage at T _J = 100°C	lr	1 20	mA
Typical Junction Capacitance (Note 1)	Cı	250	pF
Typical Thermal Resistance (Note 2)	Røjl	10	°C/W
Typical Thermal Resistance (Note 3)	RθJA	50	
Operating Temperature Range	TJ	-55 to +150	°C
Storage Temperature Range	Тѕтс		

Notes:

- 1. Measured at 1MHz and applied reverse voltage of 4V DC.
- 2. Thermal resistance junction to lead.
- 3. Thermal resistance junction to ambient.
- 4. The typical data above is for reference only


www.element14.com www.farnell.com www.newark.com





Surface Mount Schottky Barrier Rectifier




Ratings and Characteristic Curves












FIG.5-TYPICAL REVERSE CHARACTERISTICS

PERCENT RATED PEAK REVERSE VOLTAGE,(%)






Page <2> 22/06/17 V1.1

Surface Mount Schottky Barrier Rectifier



Dimensions:

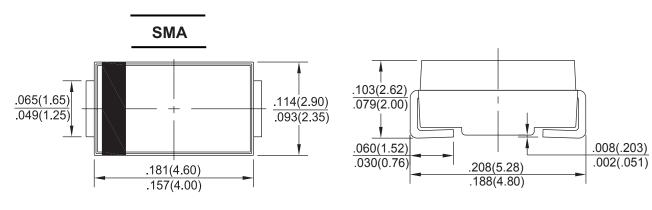

Dimensions: Inches (Millimetres)

Part Number Table

Description	Part Number	
Schottky Diode, 3A 60V SMA	SS36A+	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com www.farnell.com www.newark.com

