

Master cable - SAC-12P- 5,0-PUR/M16FR - 1693720

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Master cable, Application: Sensor/actuator box, Connection method: M8 socket Metal, Number of slots: 8, Number of positions: 12, Slot assignment: single, Status indication: No; Master cable connection: M16 plug connection, PUR/PVC, Cable length: 5 m, Shielding: No

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4017918189068
Weight per Piece (excluding packing)	512.700 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

General

Rated voltage	125 V AC
	150 V DC
Number of positions	12
Number of slots	8
Sensor/actuator connection system	M8 socket

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-40 °C ... 90 °C (for fixed installation)
	-5 °C ... 80 °C (for flexible installation)

Master cable data/connection data

Connection method	M16 plug connection
Length of cable	5 m
Cable type	Master cable suitable for flexible cable conduit

Master cable - SAC-12P- 5,0-PUR/M16FR - 1693720

Technical data

Master cable data/connection data

Signal line cross section	8x 0.34 mm ²
AWG signal line	22
Conductor structure signal line	42x 0.10 mm
Power supply cross section	2x 0.75 mm ²
AWG power supply	18
Conductor structure, voltage supply	96x 0.10 mm
External diameter	8.7 mm
Max. bending cycles	1500000
Bending radius	100 mm
Traversing path	2 m
Traversing rate	2 m/s

Insulation material

Housing material	PUR
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of the contact carrier on the master cable side	TPU
Material of threaded sleeve	Cu alloy
Material of threaded sleeve surface	Nickel-plated
Sealing material	NBR

Connection assignment

Slot/position = pin = conductor color	1 / 4 (A) = P = WH
	2 / 4 (A) = J = GN
	3 / 4 (A) = T = YE
	4 / 4 (A) = S = GY
	5 / 4 (A) = G = PK
	6 / 4 (A) = R = RD
	7 / 4 (A) = E = BK
	8 / 4 (A) = O = VT
	1-8 / 3 (0 V) = L+U = BU

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Master cable - SAC-12P- 5,0-PUR/M16FR - 1693720

Cable cross section



PUR/PVC black [PUR]

Circuit diagram

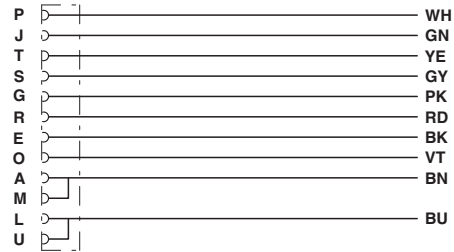

Contact assignment of the M16 socket

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311

ETIM

ETIM 2.0	EC000104
ETIM 3.0	EC000104
ETIM 4.0	EC001855
ETIM 5.0	EC001855
ETIM 6.0	EC001855

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

EAC

Master cable - SAC-12P- 5,0-PUR/M16FR - 1693720

Approvals

Ex Approvals

Approval details

EAC		B.00767
-----	---	---------

