

# HSC20 Component to HDMI™ Scaler

## KEY FEATURES


**1080P**

The HSC20 converts HD component video (Y-Pb-Pr) and Left and Right Audio signals to an HDMI output. This permits any source with any range of component video to be viewed on any HDMI display.

- Example sources:  
PS2™, XBOX 360™, PSP®, Wii™, STB, DVD player, Virgin Media Player, SKY TV, Satellite Boxes, etc.
- Can be displayed on any HDMI Display
- Compliant with HDMI 1.2
- HDCP Compliant
- Supports full range of Component Video Resolutions: 480i, 480p, 576i, 576p, 720p, 1080i, and 1080p



## Example Connection:

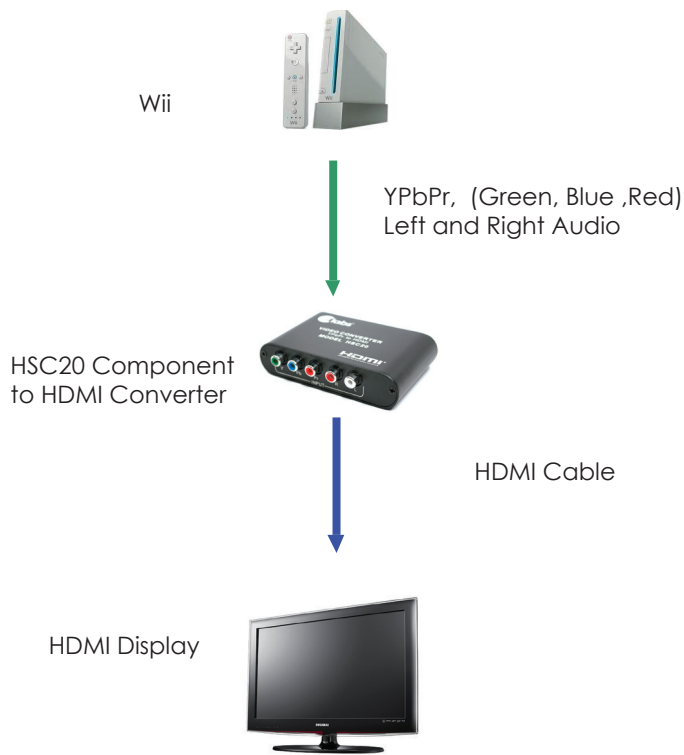

## Specifications

Power Supply Input:	5VDC/1A 2.1mm
Input Impedance:	YPbPr Component Video 75 Ohms
HDMI Transmission Rate:	5 Gbps
Output:	1 HDMI
Signal:	LED
Power:	LED
Max Transmission Distance:	less 45 ft (15m)
Compliance:	FCC, CE, Rohs Weight: 13.26 oz

## Input/ Output/ Power

Input:	3 RCA connectors for Component Video (Y-Pb-Pr) 2 RCA connectors for Left and Right Audio 1 2.1mm male power connector
Output:	1 HDMI output connector 2 LED for power and signal
Power: I/P	2 prong 100-240V at 50/60Hz @ .3A AC adapter
O/P	5 VDC /1A



Weight:  
0.31 lbs

Dimension (l x w x h in):  
4.3 X 2.9 X 1.1

### Accessories & Package:

- 1 - Power supply
- 1 - User manual
- 1 - Package box