

Main

• 1		2
		<u>.</u> •
Main		
Range of product	Harmony XVC6	
	-	ĝ
Product or component type	Complete pre-wired monolithic tower light	ځ ب
Beacon or indicator bank unit type	3 illuminated units	ť
Sound signalling	Without	
Mounting diameter	60 mm	2 1 1
Component name	XVC	
Light source	Green LED steady	
	Orange LED steady	2
	Red LED steady	4
[Us] rated supply voltage	100240 V	2 4 9
Supply circuit type	AC	ہ 2.
Complementary		t t t t t t t t t t t t t t t t t t t
Material	Polycarbonate (illuminated unit)	
	ABS (acrylonitrile butadiene-styrene) (base unit)	-
	PBT + ABS (UL94-V0) (top cover)	
Product mounting	On support tube, 22 mm	<u>.</u>
Cable energy continu	0.00	

Cable cross section	0.33 mm ²	and
	0.83 mm²	te fo
AWG gauge	AWG 18	substitute for
	AWG 22	a sub
Cable length	550 mm	as a
	450 mm	intended
Marking	CE	
[Uimp] rated impulse withstand voltage	4 kV	is not
Current consumption	60 mA	nentation
Product weight	1.07 kg	
Height	679.8 mm	Disclaimer: This docur
		This
		ner:
		clair
		Dis



Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1	
Product certifications	UL	
Protective treatment	TC	
Ambient air temperature for storage	-3570 °C	
Ambient air temperature for operation	-1050 °C	
Class of protection against electric shock	Class I conforming to EN/IEC 61140	
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529	

Offer Sustainability

Sustainable offer status	Green Premium product	
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity	
	Schneider Electric declaration of conformity	
REACh	Reference contains SVHC above the threshold - Go to CaP for more details	
	Go to CaP for more details	
Product environmental profile	Available	
Product end of life instructions	Need no specific recycling operations	

Contractual warranty


Warranty period

18 months

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

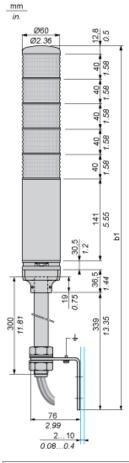

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	599.8	23.61
2 stages	639.8	25.19
3 stages	679.8	26.76
4 stages	719.8	28.34
5 stages	759.8	29.91

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

