



### Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	Blue LED steady or flashing Clear LED steady or flashing Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

### Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover)
Product mounting	On support tube, 22 mm
Cable cross section	0.33 mm <sup>2</sup> 0.83 mm <sup>2</sup>
AWG gauge	AWG 22 AWG 18
Cable length	450 mm
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	115 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz

Product weight	1.23 kg
Height	759.8 mm

## Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Class of protection against electric shock	Class I conforming to EN/IEC 61140
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference contains SVHC above the threshold - Go to CaP for more details <a href="#">Go to CaP for more details</a>
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations


## Contractual warranty

Warranty period	18 months
-----------------	-----------

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

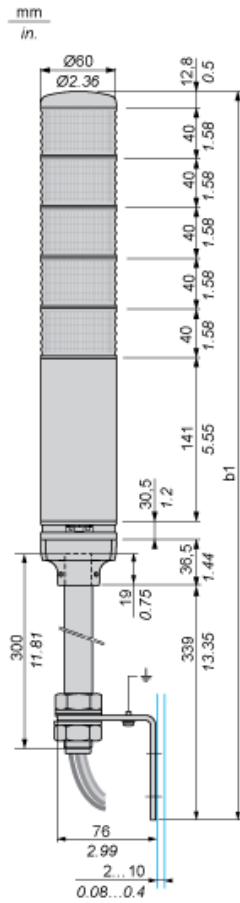

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	599.8	23.61
2 stages	639.8	25.19
3 stages	679.8	26.76
4 stages	719.8	28.34
5 stages	759.8	29.91

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

