Product datasheet Characteristics

OTB1E0DM9LP

I/O distributed module OTB - Ethernet TCP/IP - 0..100 m



Main

IVIAIII		
Range of product	Modicon OTB	
Product or component type	I/O distributed module	
Integrated connection type	Ethernet TCP/IP RJ45, transmission mode: 1 twisted pairat 10/100 Mbit/s, web server transparent ready class A10	
Discrete input number	12 conforming to EN/IEC 61131 type 1	
Discrete input logic	Sink or source	
Discrete input current	5 mA for I0I1 5 mA for I6I7 7 mA for I2I5 7 mA for I8I11	
Discrete output number	2 solid state PNP for Q0Q1 output logic: source 6 relay for Q2Q7	
Discrete output current	2000 mA relay 300 mA solid state	

Complementary

Complementary		<u>.</u>
Concept	Transparent Ready	
Port Ethernet	10BASE-T/10BASE-TX	
Bus length	0100 m, copper	Stiff
Number of devices per segment	0256	
Communication service	Modbus messaging	
Web services	No standard Web server	
Discrete input voltage	24 V	<u> </u>
Discrete input voltage type	DC	
Discrete input type	NPN or PNP	
Input voltage limits	20.426.4 V	
Electronic filtering time	0.035 ms for I0I1 at state 1 0.035 ms for I6I7 at state 1 0.04 ms for I2I5 at state 1 0.04 ms for I8I11 at state 1	oner This

	0.045 ms for I0I1 at state 0 0.045 ms for I6I7 at state 0 0.15 ms for I2I5 at state 0 0.15 ms for I8I11 at state 0
Configurable filtering time	0 ms 12 ms 3 ms
Input impedance	3.4 kOhm for I2I5 3.4 kOhm for I8I11 5.7 kOhm for I0I1 5.7 kOhm for I6I7
Discrete output voltage	24 V DC solid state 240 V AC relay 30 V DC relay
Output voltage limits	20.428.8 V solid state
Output current limits	360 mA solid state
Current per output common	8 A relay <= 0.72 A solid state
Current consumption	30 mA at 5 V DC (at state 1) relay output 40 mA at 24 V DC (at state 1) relay output 5 mA at 5 V DC (at state 0) relay output
Output overvoltage protection	3840 V
Tungsten load	8 W for solid state
Response time	300 μs at state 0 for relay 300 μs at state 1 for relay 5 μs at state 0 for solid state 5 μs at state 1 for solid state
Switchable load	>= 0.1 mA
Contact bounce time	<= 1 ms for relay
Leakage current	<= 0.1 mA at state 0 for solid state
Drop-out voltage	<= 1 V at state 1
Insulation between channels and internal logic	1500 Vrms for 1 minute for relay output 500 Vrms for 1 minute for input circuit 500 Vrms for 1 minute for solid state output
Insulation between channels	None
Contact resistance	<= 30 mOhm
Electrical durability	500000 cycles AC-1 with 500 VA load for relay output 500000 cycles AC-14 with 250 VA load for relay output 500000 cycles AC-15 with 200 VA load for relay output 500000 cycles DC-1 with 60 W load for relay output 500000 cycles DC-1 with 30 W load for relay output
Supply circuit type	DC
[Us] rated supply voltage	24 V
Supply voltage limits	20.426.2 V
Input current	<= 700 mA at 26.2 V for supply circuit
Inrush current	<= 1 A for solid state output <= 50 A for supply circuit
Power consumption	19 W
Number of I/O expansion module	07
I/O expansion capacity	132 with screw terminal discrete I/O module(s) 188 with spring terminal discrete I/O module(s) 244 with HE10 connector discrete I/O module(s) 7 x 8I or 7 x 2I or 7 x (4I/2O) with screw terminal analogue I/O module(s)
Insulation resistance	>= 10 mOhm between I/O and earth terminals >= 10 mOhm between power supply and earth
I/O connection	Removable screw terminal block
Number of common point	1 for relay output (1 NO) 1 for relay output (2 NO) 1 for relay output (3 NO) 1 for input 1 for solid state output

Counting capacity	32 bits	
Counting frequency	20000 Hz 5000 Hz	
Pulse generator number	2	
Pulse generator frequency	7 kHz	
Pulse generator function	RPWM pulse width modulation RPLS pulse generator output	
Marking	CE	
Fixing mode	By clips on 35 mm symmetrical DIN rail By screws on panel with fixing kit By screws on solid plate with fixing kit	
Status LED	1 LED per channel, green for I/O 1 LED, green for 10T 1 LED, green for PWR 1 LED, yellow for 100T 1 LED, yellow for STAT	
Product weight	0.185 kg	

Environment

IP degree of protection	IP20
Immunity to microbreaks	10 ms for supply circuit
Dielectric strength	500 V between I/O and earth terminals 500 V between power supply and earth
Standards	CSA C22.2 No 213 Class I Division 2 Group D CSA C22.2 No 213 Class I Division 2 Group B IEC 61131-2 CSA EN 61131-2 UL 508 CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group C
Product certifications	CULus
Ambient air temperature for operation	055 °C
Ambient air temperature for storage	-2570 °C
Relative humidity	3095 % without condensation
Pollution degree	2 conforming to EN 60664 2 conforming to IEC 60664
Operating altitude	02000 m
Storage altitude	03000 m
Vibration resistance	0.075 mm (f = 1057 Hz) on 35 mm symmetrical DIN rail 1 gn (f = 57150 Hz) on 35 mm symmetrical DIN rail
Shock resistance	15 gn for 11 ms conforming to EN 61131 15 gn for 11 ms conforming to IEC 61131
Resistance to electrostatic discharge	4 kV in contact conforming to IEC 61000-4-2 8 kV in air conforming to EN 61000-4-2 8 kV in air conforming to IEC 61000-4-2 4 kV in contact conforming to EN 61000-4-2
Resistance to radiated fields	10 V/m, 800000002000000000 Hz conforming to EN 61000-4-3 10 V/m, 800000002000000000 Hz conforming to IEC 61000-4-3
Resistance to fast transients	1 kV for 24 V solid state I/O conforming to IEC 61000-4-4 2 kV for 24 V supply conforming to IEC 61000-4-4

Contractual warranty

	•	
Warranty period	1	8 months

Product datasheet Dimensions Drawings

OTB1E0DM9LP

Network Interface Module


Dimensions

NOTE: * 8.5 mm (0.33 in) when the clamp is pulled out.

OTB1E0DM9LP

Mounting an Island on a Panel or in a Cabinet

Spacing Requirements

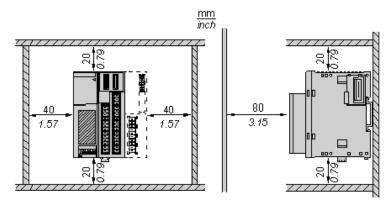


Product datasheet Mounting and Clearance

OTB1E0DM9LP

Panel Mounting

Position of the Mounting Holes for the Network Interface Module




Product datasheet Connections and Schema

OTB1E0DM9LP

24 Vdc Power Supply

Wiring Diagram




Fu 2 A fast-blow fuse ABE7FU200

Product datasheet Connections and Schema

OTB1E0DM9LP

Network Interface Module

Wiring Diagram

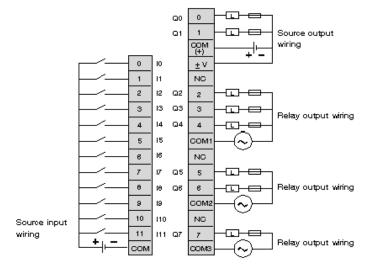

- Output points 0 and 1 are source transistor outputs, all other output points are relay.
- The COM terminals are not connected together internally.
- Connect an appropriate fuse for the load.