


XE2NP2141

limit switch contact block - 2NC - slow-break, simultaneous

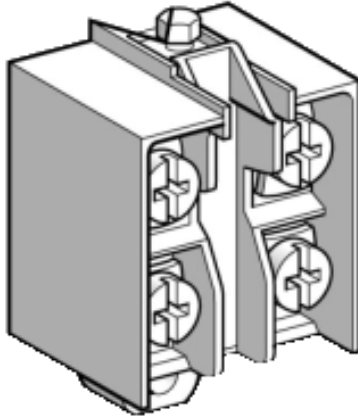

Main

Range of product	OsiSense XC
Series name	Standard format
Product or component type	Limit switch contact block
Device short name	XE2N
Associated body	ZCKL7 ZCKJ7D ZCKM7 ZCD27 ZCKS7 ZCP27 ZCKJ7
Number of poles	2
Contacts type and composition	2 NC
Contacts operation	Slow-break, simultaneous

Complementary

Product compatibility	XCKL XCKM XCKS XCKD XCKJ XCKP
Electrical connection	Screw-clamp terminals, clamping capacity: 1 x 0.5...2 x 2.5 mm ²
Contacts insulation form	Zb
Contacts material	Silver plated contacts
Positive opening	With
Minimum actuation speed	6 m/min
Contact code designation	A300, AC-15 (Ue = 240 V, Ie = 3 A) , Ithe = 10 A conforming to EN/IEC 60947-5-1 appendix A Q300, DC-13 (Ue = 250 V, Ie = 0.27 A) conforming to EN/IEC 60947-5-1 appendix A
Resistance across terminals	< 25 mOhm conforming to IEC 60255-7 category 3
[Ui] rated insulation voltage	300 V conforming to CSA C22.2 No 14

	500 V degree of pollution 3 conforming to IEC 60947-1 300 V conforming to UL 508
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60664 6 kV conforming to IEC 60947-1
Short circuit protection	10 A by gG cartridge fuse
Electrical durability	5000000 cycles, DC-13 120 V, 7 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 24 V, 13 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 48 V, 9 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0851 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------