Product datasheet Characteristics

XVC6B35S 60mm Tower ROG Pole Buzzer Flash



Main

Mani		· ·
Range of product	Harmony XVC6	
Product or component type	Complete pre-wired monolithic tower light	ن ح
Beacon or indicator bank unit type	3 illuminated units	, v
Sound signalling	Buzzer	
Mounting diameter	60 mm	¥
Component name	XVC)
Light source	Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing	iralia
[Us] rated supply voltage	24 V	:-
Supply circuit type	AC/DC	
Noise level	7085 dB (continuous or intermittent tone) at 1 m	E

Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover) STK (chromium-plated) (support tube)	
Product mounting	On support tube, 22 mm	
Cable cross section	0.33 mm²	
AWG gauge	AWG 22	
Cable length	550 mm	
Marking	CE	
[Uimp] rated impulse withstand voltage	0.8 kV	
Current consumption	115 mA	
Fundamental frequency	2.23 kHz	
Flashing frequency	1 Hz	
Product weight	0.98 kg	
Height	563.1 mm	

Environment

Standards	EN/IEC 61000-6-2	
	EN/IEC 61000-6-3	
	EN/IEC 61000-6-4	
Product certifications	UL	
Protective treatment	TC	
Ambient air temperature for storage	-3570 °C	
Ambient air temperature for operation	-1050 °C	
Class of protection against electric shock	Class I conforming to EN/IEC 61140	
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529	

Offer Sustainability

Sustainable offer status	Green Premium product	
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity	
	Schneider Electric declaration of conformity	
REACh	Reference contains SVHC above the threshold - Go to CaP for more details	
	Go to CaP for more details	
Product environmental profile	Available	
	Product environmental	
Product end of life instructions	Need no specific recycling operations	


Contractual warranty

Contractual warranty	
Warranty period	18 months

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

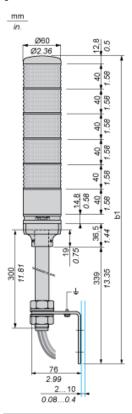

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	483.1	19.02
2 stages	523.1	20.59
3 stages	563.1	22.17
4 stages	603.1	23.74
5 stages	643.1	25.32

Product datasheet Mounting and Clearance

XVC6B35S

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

