



Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	Blue LED steady or flashing Clear LED steady or flashing Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover) STK (chromium-plated) (support tube)
Product mounting	On support tube, 22 mm
Cable cross section	0.33 mm ²
AWG gauge	AWG 22
Cable length	550 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	165 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Product weight	1.06 kg

Height	643.1 mm
--------	----------

Environment	
Standards	EN/IEC 61000-6-4 EN/IEC 61000-6-3 EN/IEC 61000-6-2
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Class of protection against electric shock	Class I conforming to EN/IEC 61140
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529


Offer Sustainability	
Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold - Go to CaP for more details Go to CaP for more details
Product environmental profile	Available Product environmental
Product end of life instructions	Need no specific recycling operations

Contractual warranty	
Warranty period	18 months

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

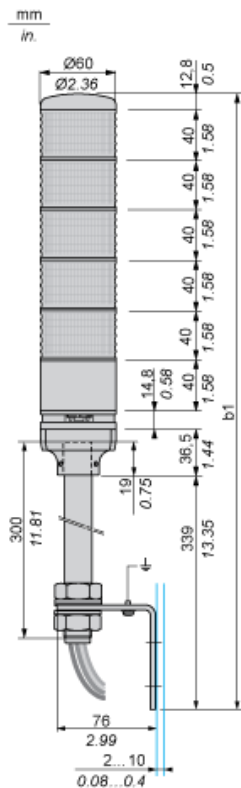

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	483.1	19.02
2 stages	523.1	20.59
3 stages	563.1	22.17
4 stages	603.1	23.74
5 stages	643.1	25.32

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

