## **Product datasheet** Characteristics

# TM241C40R controller M241 40 IO relay



#### Main

Main	
Range of product	Modicon M241
Product or component type	Logic controller
[Us] rated supply voltage	100240 V AC
Discrete input number	24 discrete input including 8 fast input conforming to IEC 61131-2 Type 1
Discrete output type	Relay Transistor
Discrete output number	12 relay 4 transistor including 4 fast output
Discrete output voltage	24 V DC for transistor output 5125 V DC for relay output 5250 V AC for relay output
Discrete output current	0.1 A with TR0TR3 terminal(s) for fast output (PTO mode) 2 A with Q4Q15 terminal(s) for relay output 0.5 A with TR0TR3 terminal(s) for transistor output

#### Complementary

Main		
Main Range of product	Modicon M241	
Product or component type	Logic controller	
[Us] rated supply voltage	100240 V AC	
Discrete input number	24 discrete input including 8 fast input conforming to IEC 61131-2 Type 1	
Discrete output type	Relay Transistor	
Discrete output number	12 relay 4 transistor including 4 fast output	
Discrete output voltage	24 V DC for transistor output 5125 V DC for relay output 5250 V AC for relay output	
Discrete output current	0.1 A with TR0TR3 terminal(s) for fast output (PTO mode) 2 A with Q4Q15 terminal(s) for relay output	
	0.5 A with TR0TR3 terminal(s) for transistor output	
	0.5 A with TR0TR3 terminal(s) for transistor output	
Discrete I/O number	0.5 A with TR0TR3 terminal(s) for transistor output  40	
Complementary Discrete I/O number Number of I/O expansion module	0.5 A with TR0TR3 terminal(s) for transistor output	
Discrete I/O number Number of I/O expansion module	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture)	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits	0.5 A with TR0TR3 terminal(s) for transistor output  40  7 (local I/O architecture) 14 (remote I/O architecture)	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits  Network frequency	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture) 14 (remote I/O architecture) 85264 V	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits  Network frequency  Discrete input logic	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture) 14 (remote I/O architecture) 85264 V 50/60 Hz	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits  Network frequency  Discrete input logic  Discrete input voltage	0.5 A with TR0TR3 terminal(s) for transistor output  40  7 (local I/O architecture) 14 (remote I/O architecture) 85264 V  50/60 Hz  Sink or source	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits  Network frequency  Discrete input logic  Discrete input voltage  Discrete input voltage type	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture) 14 (remote I/O architecture) 85264 V 50/60 Hz Sink or source 24 V	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits  Network frequency  Discrete input logic  Discrete input voltage  Discrete input voltage type  Voltage state1 guaranteed	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture) 14 (remote I/O architecture) 85264 V 50/60 Hz Sink or source 24 V DC	
Discrete I/O number  Number of I/O expansion module  Supply voltage limits  Network frequency  Discrete input logic  Discrete input voltage  Discrete input voltage type  Voltage state1 guaranteed  Current state 1 guaranteed	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture) 14 (remote I/O architecture) 85264 V 50/60 Hz Sink or source 24 V DC >= 15 V for input >= 2.5 mA for input	
Discrete I/O number	0.5 A with TR0TR3 terminal(s) for transistor output  40 7 (local I/O architecture) 14 (remote I/O architecture) 85264 V 50/60 Hz Sink or source 24 V DC >= 15 V for input >= 2.5 mA for fast input	

Input impedance	4.7 kOhm for input
Response time	50 μs turn-on operation with I0I15 terminal(s) for input
Configurable filtering time	1 µs for fast input
Discrete output logic	Positive logic (source)
Output voltage limits	125 V DC relay output 30 V DC transistor output 277 V AC relay output
Output frequency	<= 1 kHz for transistor output <= 20 kHz for fast output (PWM mode) <= 100 kHz for fast output (PLS mode)
Accuracy	+/- 0.1 % at 20100 Hz for fast output
Protection type	Short-circuit protection for transistor output Short-circuit and overload protection with automatic reset for transistor output Reverse polarity protection for transistor output Without protection for relay output
Reset time	10 ms automatic reset output 12 s automatic reset fast output
Memory capacity	8 MB for program 64 MB for system memory RAM
Data backed up	128 MB built-in flash memory for backup of user programs
Data storage equipment	<= 32 GB SD card optional
Battery type	BR2032 lithium non-rechargeable, battery life: 4 yr
Backup time	2 years at 25 °C
Execution time for 1 KInstruction	0.3 ms for event and periodic task 0.7 ms for other instruction
Application structure	8 event tasks 8 external event tasks 4 cyclic master tasks 3 cyclic master tasks + 1 freewheeling task
Realtime clock	With
Clock drift	<= 60 s/month at 25 °C
Positioning functions	PWM/PTO function 4 channel(s) (positioning frequency: 100 kHz)
Counting input number	4 fast input (HSC mode)
Control signal type	A/B signal at 100 kHz for fast input (HSC mode) Pulse/Direction signal at 200 kHz for fast input (HSC mode) Single phase signal at 200 kHz for fast input (HSC mode)
Integrated connection type	USB port with connector mini B USB 2.0  Non isolated serial link "serial 1" with connector RJ45 and interface RS232/RS485  Non isolated serial link "serial 2" with connector removable screw terminal block and interface RS485
Supply	Serial link supply "serial 1" at 5 V, 200 mA
Transmission rate	1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m - communication protocol: RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m - communication protocol: RS232 480 Mbit/s for bus length of 3 m - communication protocol: USB
Communication port protocol	Modbus non isolated serial link with master/slave method
Local signalling	1 LED green for SD card access (SD) 1 LED red for BAT 1 LED green for SL1 1 LED green for SL2 1 LED per channel green for I/O state 1 LED red for I/O error (I/O) 1 LED red for bus fault on TM4 (TM4) 1 LED red for module error (ERR) 1 LED green for PWR 1 LED green for RUN
Electrical connection	Removable screw terminal block for inputs and outputs (pitch 5.08 mm) Removable screw terminal block for connecting the 24 V DC power supply (pitch 5.08 mm)
Cable length	<= 50 m unshielded cable for input <= 10 m shielded cable for fast input <= 3 m shielded cable for fast output <= 50 m unshielded cable for output
Insulation	500 V AC between supply and internal logic Non-insulated between supply and ground
Marking	CE

Sensor power supply	24 V DC at 400 mA supplied by the controller
Surge withstand	2 kV for power lines (AC) in common mode conforming to EN/IEC 61000-4-5 2 kV for relay output in common mode conforming to EN/IEC 61000-4-5 1 kV for shielded cable in common mode conforming to EN/IEC 61000-4-5 1 kV for power lines (AC) in differential mode conforming to EN/IEC 61000-4-5 1 kV for relay output in differential mode conforming to EN/IEC 61000-4-5 1 kV for input in common mode conforming to EN/IEC 61000-4-5 1 kV for transistor output in common mode conforming to EN/IEC 61000-4-5
Mounting support	Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 rail conforming to IEC 60715 Plate or panel with fixing kit
Height	90 mm
Depth	95 mm
Width	190 mm
Product weight	0.62 kg

### Environment

Environment	
Standards	CSA C22.2 No 142 ANSI/ISA 12-12-01 UL 1604 CSA C22.2 No 213 EN/IEC 61131-2 : 2007 Marine specification (LR, ABS, DNV, GL) UL 508
Product certifications	RCM IACS E10 cULus CSA
Resistance to electrostatic discharge	4 kV on contact conforming to EN/IEC 61000-4-2 8 kV in air conforming to EN/IEC 61000-4-2
Resistance to electromagnetic fields	10 V/m (80 MHz1 GHz) conforming to EN/IEC 61000-4-3 3 V/m (1.4 GHz2 GHz) conforming to EN/IEC 61000-4-3 1 V/m (2 GHz3 GHz) conforming to EN/IEC 61000-4-3
Resistance to fast transients	2 kV for power lines conforming to EN/IEC 61000-4-4 2 kV for relay output conforming to EN/IEC 61000-4-4 1 kV for serial link conforming to EN/IEC 61000-4-4 1 kV for input conforming to EN/IEC 61000-4-4 1 kV for transistor output conforming to EN/IEC 61000-4-4
Resistance to conducted disturbances, induced by radio frequency fields	10 V (0.1580 MHz) conforming to EN/IEC 61000-4-6 3 V (0.180 MHz) conforming to Marine specification (LR, ABS, DNV, GL) 10 V (spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz)) conforming to Marine specification (LR, ABS, DNV, GL)
Electromagnetic emission	Conducted emissions, test level: $12069 \text{ dB}\mu\text{V/m QP}$ , condition of test: power lines (radio frequency: $10150 \text{ kHz}$ ) conforming to EN/IEC 55011 Conducted emissions, test level: $7963 \text{ dB}\mu\text{V/m QP}$ , condition of test: power lines (radio frequency: $150 \text{ kHz}1.5 \text{ MHz}$ ) conforming to EN/IEC 55011 Conducted emissions, test level: $63 \text{ dB}\mu\text{V/m QP}$ , condition of test: power lines (radio frequency: $1.530 \text{ MHz}$ ) conforming to EN/IEC 55011 Conducted emissions, test level: $79 \text{ dB}\mu\text{V/m QP/66 dB}\mu\text{V/m AV}$ , condition of test: power lines (radio frequency: $0.150.5 \text{ MHz}$ ) conforming to EN/IEC 55011 Conducted emissions, test level: $73 \text{ dB}\mu\text{V/m QP/60 dB}\mu\text{V/m AV}$ , condition of test: power lines (radio frequency: $0.5300 \text{ MHz}$ ) conforming to EN/IEC 55011 Radiated emissions, test level: $40 \text{ dB}\mu\text{V/m QP}$ with class A, condition of test: $10 \text{ m}$ (radio frequency: $30230 \text{ MHz}$ ) conforming to EN/IEC 55011 Radiated emissions, test level: $47 \text{ dB}\mu\text{V/m QP}$ with class A, condition of test: $10 \text{ m}$ (radio frequency: $230 \text{ MHz}$ ). Conforming to EN/IEC 55011
Immunity to microbreaks	10 ms
Ambient air temperature for operation	-1055 °C for horizontal installation -1050 °C for vertical installation
Ambient air temperature for storage	-2570 °C
Relative humidity	1095 % without condensation in operation 1095 % without condensation in storage
IP degree of protection	IP20 with protective cover in place
Pollution degree	2
Operating altitude	02000 m

Storage altitude	03000 m
Vibration resistance	3.5 mm (vibration frequency: 58.4 Hz) on symmetrical rail 3 gn (vibration frequency: 8.4150 Hz) on symmetrical rail 3.5 mm (vibration frequency: 58.4 Hz) on panel mounting 3 gn (vibration frequency: 8.4150 Hz) on panel mounting
Shock resistance	15 gn for 11 ms


## Offer Sustainability


Sustainable offer status	Green Premium product	
RoHS (date code: YYWW)	Compliant - since 1350 - Schneider Electric declaration of conformity	
	Schneider Electric declaration of conformity	
REACh	Reference not containing SVHC above the threshold	
	Reference not containing SVHC above the threshold	
Product environmental profile	Available	
Product end of life instructions	Available	

# Product datasheet Dimensions Drawings

# TM241C40R

#### **Dimensions**






# Product datasheet Mounting and Clearance


# TM241C40R

#### Clearance

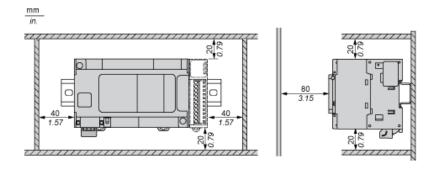


## TM241C40R

## **Mounting Position**




## Acceptable Mounting



NOTE: Expansion modules must be mounted above the logic controller.

## **Incorrect Mounting**








# Product datasheet Mounting and Clearance

# TM241C40R

## Direct Mounting On a Panel Surface

## Mounting Hole Layout


mm

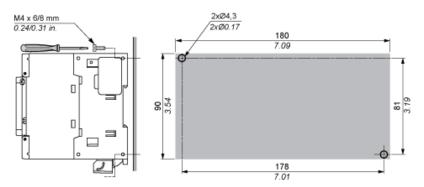

## TM241C40R

#### **Digital Inputs**


### Wiring Diagram (Positive Logic)

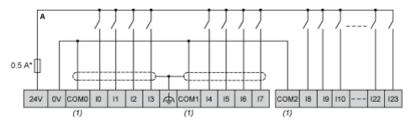

(\*): Type T fuse

(1): The COM0, COM1 and COM2 terminals are not connected internally.

#### Wiring Diagram (Negative Logic)

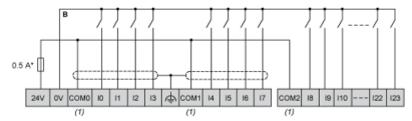

(\*): Type T fuse


(1): The COM0, COM1 and COM2 terminals are not connected internally.

# Product datasheet Connections and Schema

# TM241C40R

## **Fast Transistor Outputs**

## Wiring Diagram





(\*): 2 A fast-blow fuse

# TM241C40R

#### **Relay Outputs**

#### Wiring Diagram



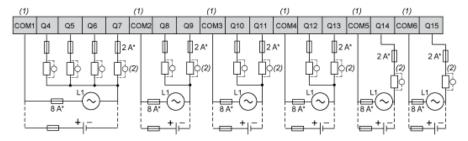

- (\*): Type T fuse (1): The terminals COM1 to COM6 are not connected internally.
- (2): To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each i

# Product datasheet Connections and Schema

# TM241C40R

#### **USB Mini-B Connection**

