

Keysight N2750A/51A/52A Infiniium Differential Active Probes

Data Sheet



Key Features

Measurement versatility

- 1.5 GHz, 3.5 GHz, and 6 GHz probe bandwidth models
- Dual attenuation ratio (2:1/10:1)
- High input resistance (200 k Ω differential, 100 k Ω single-ended)
- Wide input dynamic range (10 Vpp)
- Wide offset range (± 15 V)
- High CMRR (> 60 dB at 1 MHz)

Superb usability

- InfiniiMode probing for making differential, single-ended and common mode measurements with a single probe
- Built-in multi-function scope control for quick access to a variety of scope functions
- Built-in "Headlight" to see where you are probing
- Includes solder-in, browser, and socketed tips standard
- AutoProbe interface for auto configuration and probe power


At affordable prices

- The N2750A Series InfiniiMode differential probes are a new generation of low-cost, 1.5 GHz, 3.5 GHz, and 6 GHz differential active probes compatible with the Keysight Technologies, Inc. InfiniiVision and Infiniium oscilloscopes' AutoProbe interface.

Measurement Versatility

These probes integrate many of the features and characteristics needed for today's general-purpose, high-speed differential probing — especially in digital system design, component design/characterization, and differential serial bus measurements. The N2750A Series differential probes offer 2:1 and 10:1 dual attenuation settings, allowing them to be used for a broad range of applications. Dual attenuation range is automatically configured depending on the size of the input signal.

The new differential probes have an input resistance of 200 k Ω (differential) or 100 k Ω (each input to ground) and an extremely low input capacitance of 700 fF to minimize circuit loading. This, accompanied with superior signal fidelity, makes these probes useful for most digital design and debug applications. And with their wide dynamic range (10 Vpp) and offset range (± 15 V), these probes can be used in a wide variety of analog signal measurements as well.

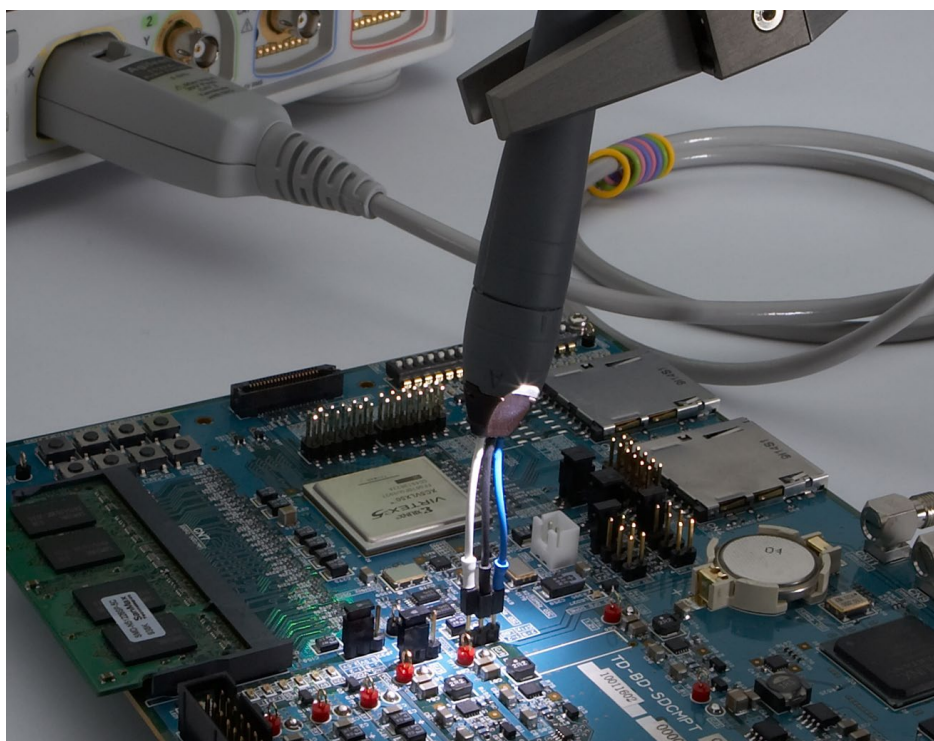

Superb Usability

InfiniiMode

The N2750A Series probes come with new InfiniiMode operation modes. The InfiniiMode allows convenient measurements of differential, single-ended, and common mode signals with a single probe tip without reconnecting the probe to change the connection. The N2750A probe's InfiniiMode provides the following modes of operation.

- A – B (differential)
- A – ground (single-ended A)
- B – ground (single-ended B)
- (A+B)/2 – ground (common mode)

Quick action scope control

The N2750A Series differential probes provide convenient and quick access to various functions on the scope. You often have a need to control the scope while you hold a probe in your hand. With the quick action scope control feature built into the probe, you can turn the built-in headlight of the probe on and off, or control some frequently used scope functions such as RUN/STOP, auto scale, quick print, quick save, etc. with only a button press on the probe. Get control of your most needed function with a push of the quick action control button on the probe. The following scope functions can be controlled with the quick action control button.

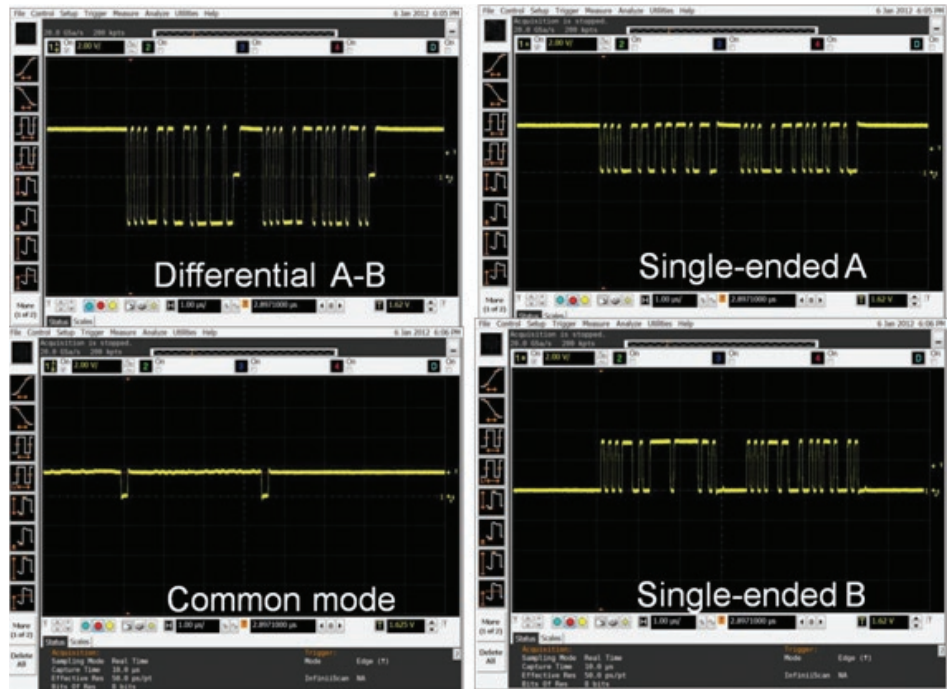


Figure 1. The InfiniiMode allows convenient measurements of differential, single-ended (A, B), and common mode signals with a single probe tip without reconnecting the probe to change the connection.

For Infiniium oscilloscopes:

- Headlight on-off/intensity control
- InfiniiMode
- Run/stop toggle
- Single
- Clear display
- Autoscale
- No action
- Multipurpose (mapped to quick action button)
 - Quick Measure
 - Quick Print
 - Quick Screen
 - Quick Setup
 - Quick Waveform
 - Quick Email
 - Quick Execute
 - Quick Control

For InfiniiVision oscilloscopes:

- Headlight on-off/intensity control
- InfiniiMode
- Run/stop toggle
- Single
- Clear display
- Autoscale
- Force trigger
- Quick action (mapped to quick action button)
 - Quick measure all
 - Quick measure statistics reset
 - Quick mask statistics reset
 - Quick print
 - Quick save
 - Quick e-mail
 - Quick recall
 - Quick freeze display
 - Quick trigger mode
 - Quick clear display

Flexibility in probe use models is also a vital necessity. The probes come standard with three different types of exchangeable probe tips that allow for easy connections to the circuit under test. These probe tips enable you to access multiple signals on anything from header connectors to hard-to-reach, high-density circuitry. The probes are equipped with a white LED headlight to illuminate the circuit under test which will help you see where you are probing.

The probes are powered directly by the AutoProbe interface, eliminating the need for an additional power supply. The AutoProbe interface also automatically identifies the probe type for auto configuration of the probe.

	Browser tip	Solder-in tip	Socketed tip
Maximum bandwidth	Up to 6 GHz warranted, 7 GHz typical (with N2752A) Up to 3.5 GHz (with N2751A) Up to 1.5 GHz (with N2750A)	Up to 2.5 GHz (with N2751A/52A) Up to 1.5 GHz (with N2750A)	Up to 3 GHz (with N2751A/52A) Up to 1.5 GHz (with N2750A)
InfiniiMode	No	Yes	Yes
Key features	Adjustable pitch spacing (0.5 to 7.5 mm), full bandwidth, differential mode only, head light, damping R tip	Damping R tip	Damping R tip
Applications	Highest performance (7 GHz), quick and simple hand browsing	For soldering tips directly to test devices, semi-permanent DUT signals, differential signals where SE and common modes need to be investigated	For directly connecting to 0.1" header pins
Replacement part number	N2776A (qty 3) ¹	N2777A (qty 3) ¹	N2778A (qty 3) ¹

1. Comes with two each solder-in, socketed, and browser tips per each probe.



Figure 2. N2750A Series differential probe with browser tip.

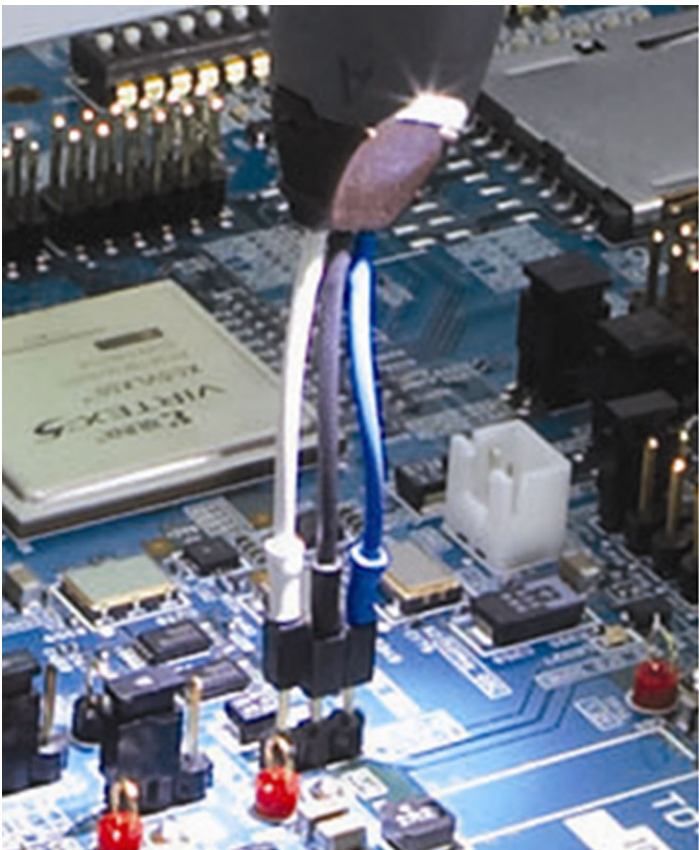


Figure 3. With InfiniiMode socketed tip.

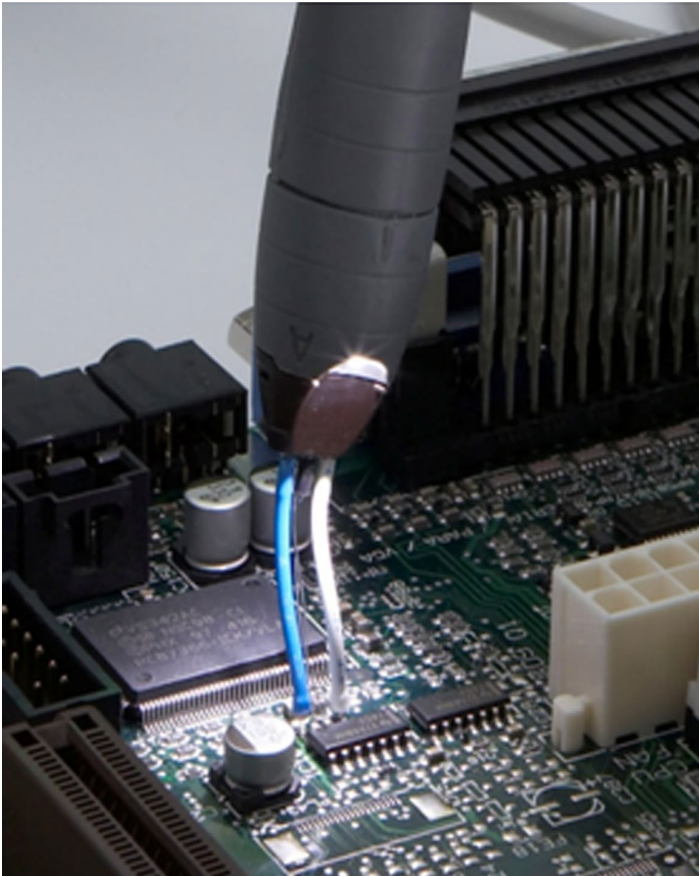


Figure 4. With InfiniiMode solder-in tip.

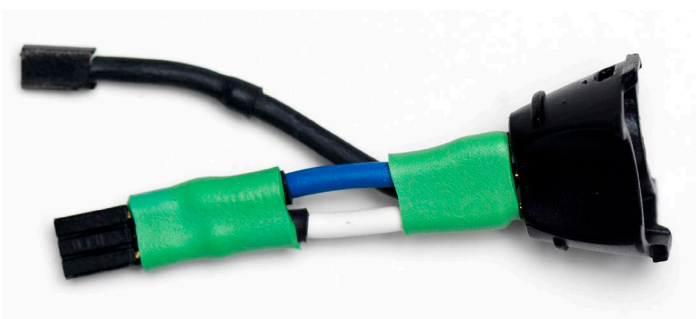


Figure 5. N4822A socketed tip for USB/Ethernet test fixture (not included in the standard probe kit).

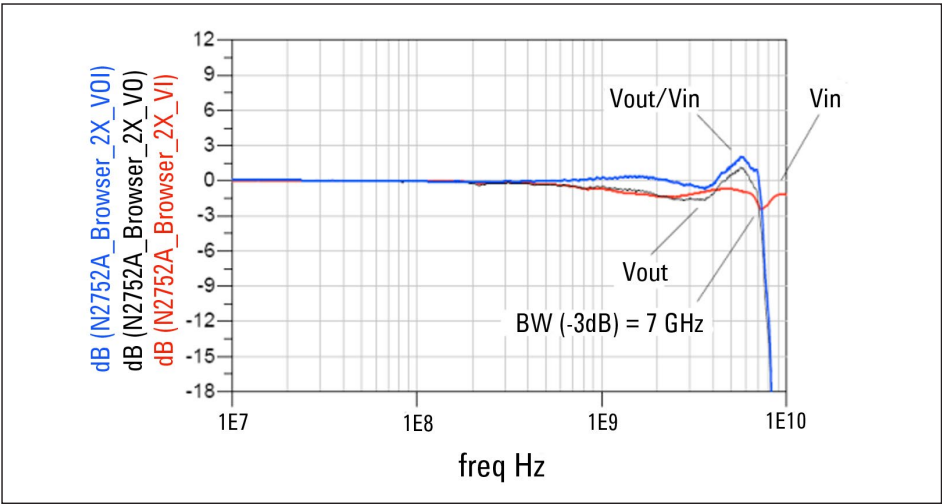


Figure 6. Vout/Vin frequency response of N2752A (at 2:1) with browser tip.

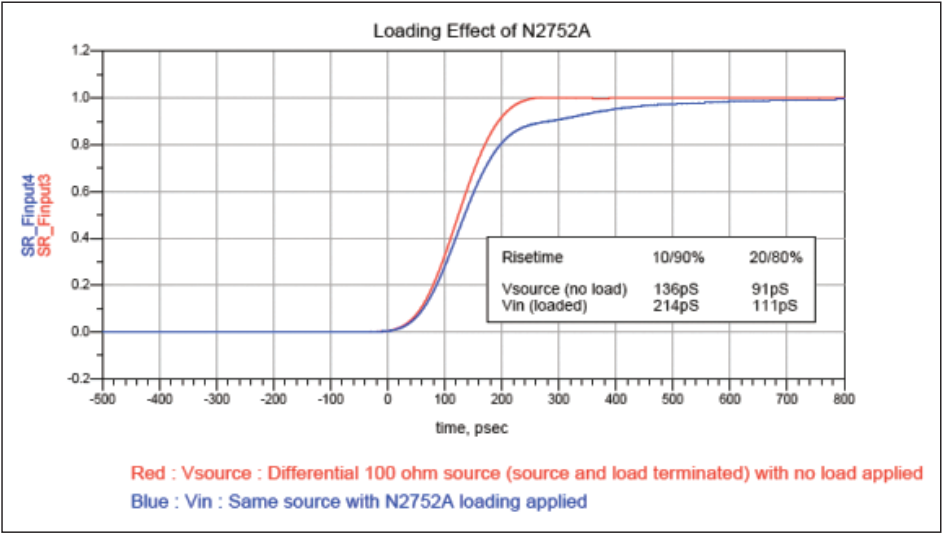


Figure 7. Loading effect of N2752A (at 2:1) with browser tip.

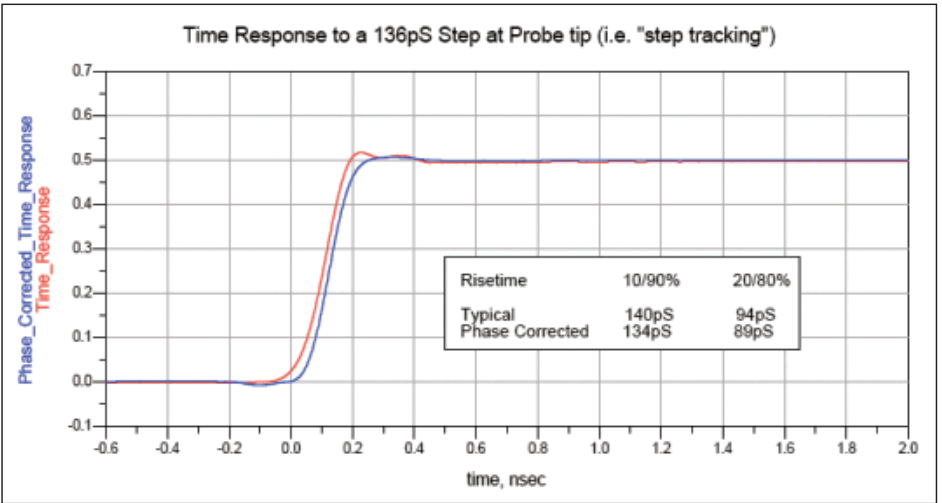


Figure 8. Time domain response to a 136 psec step of N2752A (at 2:1) with browser tip.

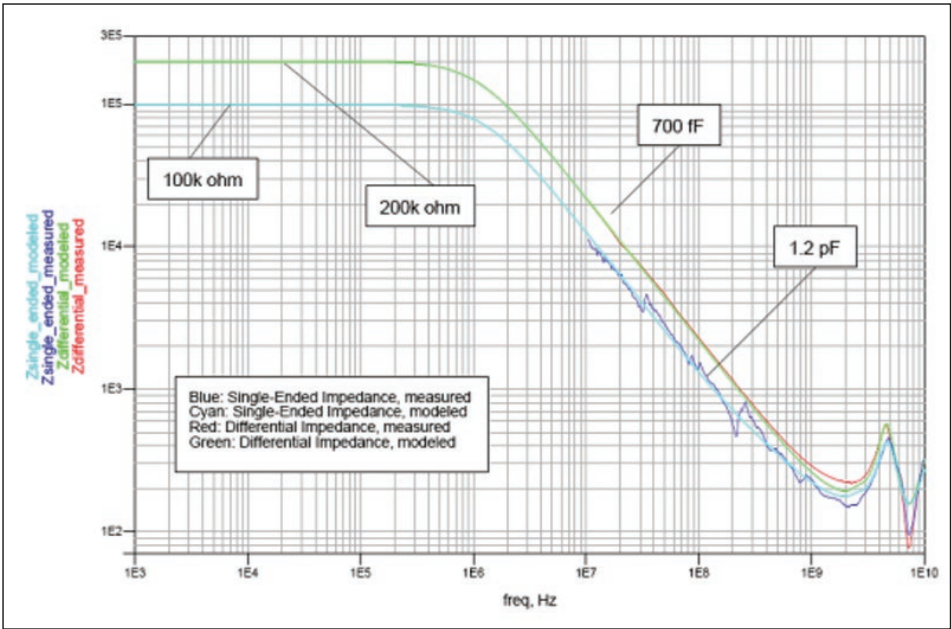


Figure 9. Input impedance over frequency of N2752A.

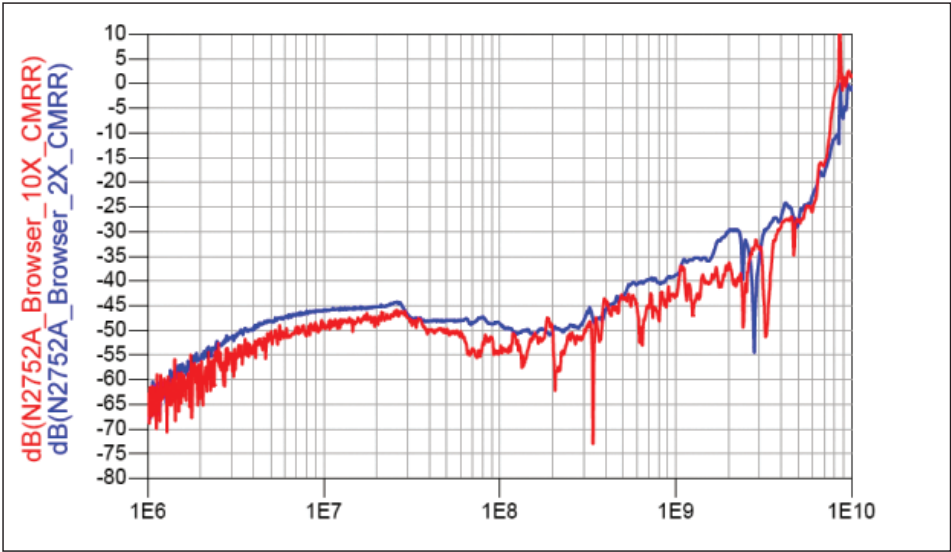


Figure 10. Common mode rejection ratio of N2752A (red: 2:1, blue: 10:1).

Characteristics and specifications			
Model number	N2750A	N2751A	N2752A
Probe bandwidth ¹ (-3 dB)	1.5 GHz	3.5 GHz	6 GHz (warranted), 7 GHz (typical)
Rise time, probe only (10 to 90%)	233 psec	100 psec	58.3 psec
System bandwidth (with Keysight oscilloscope)	1 GHz (with Keysight's 1 GHz Infiniium/InfiniVision oscilloscope)	2.5 GHz (with Keysight's 2.5 GHz Infiniium oscilloscope)	4/6 GHz (with Keysight's 4/6 GHz Infiniium oscilloscope)
Input resistance (at DC) ¹	200 k Ω \pm 2 % (differential mode) 100 k Ω \pm 2 % (single-ended mode) 50 k Ω \pm 2 % (common mode)		
Input capacitance	700 fF (with browser)		
Attenuation ratio (at DC)	2:1/10:1		
Input dynamic range	\pm 1 V, 2 V _{pp} (at 2:1)/ \pm V, 10 V _{pp} (at 10:1)		
Input common mode range	\pm 15 V (from DC to 100 Hz), \pm 2.5 V (for > 100 Hz) ³		
Offset range	\pm 15 V		
Offset accuracy ²	< 3 %		
Maximum non-destructive input voltage	\pm 30 V (DC + peak AC)		

1. Denotes warranted electrical specifications at 2:1 attenuation mode after 20 minute warm-up. All others are typical.

2. When calibrated on the oscilloscope, these characteristics are determined by the oscilloscope characteristics.

3. Assumes symmetric differential signals.

Characteristics and specifications			
Model number	N2750A	N2751A	N2752A
Differential mode rejection ratio		40 dB at 1 MHz 40 dB at 30 MHz 30 dB at 1 GHz	
Channel isolation, at single-ended mode		60 dB at 1 MHz 45 dB at 30 MHz 20 dB at 1 GHz	
Offset gain accuracy		< 3% before calibration < 1% after calibration	
Noise referred to input		2.5 mVrms (at 2:1), 7 mVrms (at 10:1)	
Maximum signal slew rate		30 V/ns (differential, 10x), 15 V/ns (single-ended, 10x)	
Zero offset error referred to input		< 30 mV before calibration scope, < 5 mV after calibration scope	
Propagation delay		6.85 nsec	
ESD tolerance		> 8 kV from 100 pF, 300 Ω , HBM	
Output impedance		50 Ω	
Cable length		1.3 m	
Probe weight		100 g	
Ambient operating temperature		0 to +40 °C	
Ambient non-operating temperature		-40 to +70 °C	
Operating humidity		Up to 95% RH at +40 °C	
Non-operating humidity		Up to 90% RH at +65 °C	
Operating altitude		4,600 m	
Non-operating altitude		15,300 m	
EMC/EMI		Radiated Emission: CISPER 11 Group 1, Class A. ESD: IEC61000-4-2 4KV contact discharge, 8KV air discharge	
Standard accessories		2x InfiniiMode solder-in tips 1x InfiniiMode socketed tip 1x differential browser tip	
Others (included)		1x calibration certificate 1x accessory configuration card	
Standard warranty		1 year (extended warranty available at cost)	
Recommended Keysight oscilloscopes ¹	InfiniiVision 3000 X-Series with software ver 2.2 or higher, 4000 X-Series with 3.01 or higher, 6000 X-Series with 6.0 or higher, Infiniium 9000 Series with 3.5 or higher, S-Series with 5.0 or higher	Infiniium 9000 and 90000A Series with software ver 3.5 or higher, S-Series with 5.0 or higher	Infiniium 9000 and 90000A Series with software ver 3.5 or higher, S-Series with 5.0 or higher


1. The N2750A Series differential probes can be used with the Infiniium V, and 90000X/Q Series scope with the N5442A precision BNC adapter.

Ordering information	
Model number	Description
N2750A ¹	1.5 GHz InfiniiMode differential probe
N2751A ¹	3.5 GHz InfiniiMode differential probe
N2752A ¹	6 GHz InfiniiMode differential probe
N2776A	Differential browser tips (qty 3)
N2777A	InfiniiMode solder-in tips (qty 3)
N2778A	InfiniiMode socketed tips (qty 3)
N4822A	Socketed tip for USB/ethernet application fixtures (not included in the standard probe kit)

1. Comes with two each solder-in, socketed and browser tips per each probe.

Other recommended accessories	
Model number	Description
N2787A	3D probe positioner
E2655C	Performance verification and deskew fixture
N5442A	Precision BNC adapter for V, and 90000X/Q Series oscilloscopes

Publication title	Publication number
<i>Infiniium Oscilloscope Probes and Accessories - Data Sheet</i>	5968-7141EN
<i>Optimizing Oscilloscope Measurement Accuracy on High-Performance Systems with Keysight Active Probes - Application Note</i>	5988-5021EN
<i>The Truth About the Fidelity of High-Bandwidth Voltage Probes - Application Note</i>	5988-6515EN
<i>Restoring Confidence in Your High-Bandwidth Probe Measurements - Application Note</i>	5988-7951EN
<i>Improving Usability and Performance in High-Bandwidth Active Oscilloscope Probes - Application Note</i>	5988-8005EN
<i>Performance Comparison of Differential and Single-Ended Active Voltage Probes - Application Note</i>	5988-8006EN
<i>Understanding and Using Offset in InfiniiMax Active Probes - Application Note</i>	5988-9264EN
<i>Time-Domain Response of InfiniiMax Probes and 54850 Series Infiniium Oscilloscopes - Application Note</i>	5988-9608EN
<i>Side-by-Side Comparison of Agilent and Tektronix Probing Measurements on High-Speed Signals - Application Note</i>	5989-0553EN
<i>Using InfiniiMax Probes with Test Equipment other than Infiniium Oscilloscopes - Configuration Guide</i>	5989-1869EN
<i>InfiniiMax Probes Impact on Lead-Free (ROHS) Compliance - Application Note</i>	5989-5179EN
<i>Oscilloscope Probes and Accessories - Selection Guide</i>	5989-6162EN
<i>Tips and Techniques for Making Power Supply Noise Measurements with an Scope - Application Note</i>	5989-6755EN
<i>Tips for Making Low Current Measurements with an Oscilloscope and Current Probe - Application Note</i>	5989-7529EN
<i>Extending the Range of InfiniiMax Probes - Application Note</i>	5989-7587EN
<i>Eight Hints for Better Scope Probing - Application Note</i>	5989-7894EN
<i>Oscilloscope Probing for High-Speed Signals - Application Note</i>	5989-9177EN
<i>Why Oscilloscope Measurements May Require Extreme Probing - Application Note</i>	5990-4721EN
<i>How Offset, Dynamic Range and Compression Affect Measurements - Application Note</i>	5990-8255EN

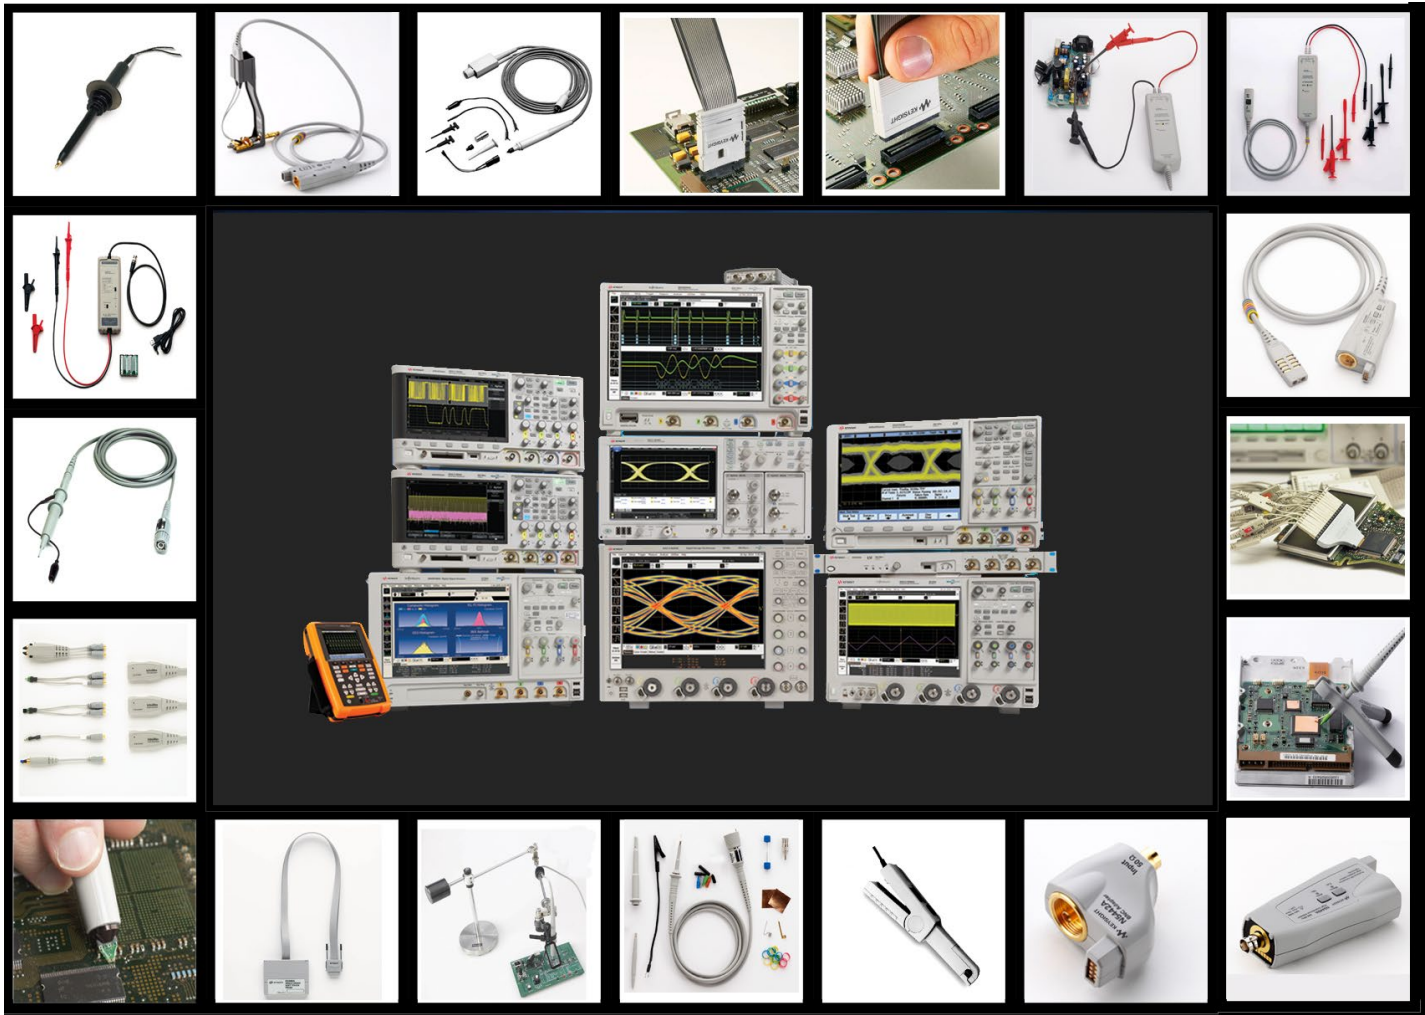

Keysight Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.





www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



1939 THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-01-01-16)



www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with a three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

www.keysight.com/find/service

Keysight Infoline

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com

www.keysight.com/find/InfiniiMode



Unlocking Measurement Insights

This information is subject to change without notice.
© Keysight Technologies, 2012 - 2016
Published in USA, January 29, 2016
5991-0560EN
www.keysight.com