Electro Mech Buzzer

pro-**signal**

Features

RoHS Compliant


- Small electro mechanical indicator with an internal drive circuit
- · Continuous tone buzzer with high sound output for its size 80dB
- PCB pins with a 5mm pin spacing
- Wave solderable and washable
- Audio device for use in a wide range of applications including PDAs, security and safety products, medical equipment and weighing machines

Specifications

Housing Material	: PBT	
Rated Voltage	: 5V DC	
Operating Voltage	: 3 ~ 7V DC	
Rated Current*	: ≤25mA	
Sound Output at 30cm*	: ≥80dB	
Resonant Frequency	: 2730 ±300Hz	
Tone	: Continuous	
Operating Temperature	: -20°C to +80°C	
Storage Temperature	: -30°C to +85°C	
Weight	: 1g	
*Value applying at rated voltage (DC)		

All data at 25°C unless otherwise specified

Diagram

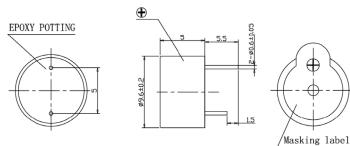

Dimensions: Millimetres Tolerance: ±0.5mm

Part Number Table

Description	Part Number
Electro Mech Buzzer, 3-7V DC, 80dB	ABI-057-RC

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage resulting from any reliance on the Information or use of it (including liability resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell Limited 2016.

Page <1>

www.element14.com www.farnell.com www.newark.com www.cpc.co.uk

