
## MCM Relay Quick Reference Sheet

This instruction sheet is intended to provide information additional to that provided on the manufacturer's specification sheet. Extreme care should be taken when working with these relay devices, as potentially lethal voltages exist at exposed contact points. It is the responsibility of the user to determine appropriate application of this product and ensure that installation will not create a hazard to users or other equipment.

## **General Purpose Relays**

The following relay models are commonly used for standard switching and control applications. Each consists of two contacts for connection of supply voltage, with normally open (NO) and normally closed (NC) output contacts as shown. They are compatible with standard 8–pin and 11–pin relay sockets, with pin–out matching industry standard models.

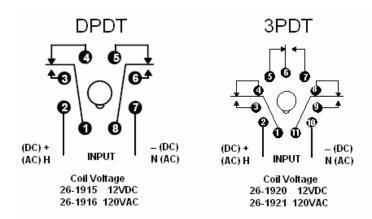

## **Specifications**

Specifications							
Model	Pins	Type	Coil	Coil	Contact	Coil	
				Current	Rating	Resistance	
26-1915	8	DPDT	12VDC	130mA	10A	92.3Ω	
26-1916	8	DPDT	120VAC	25mA	10A	$480.0 \Omega$	
26-1920	11	3PDT	12VDC	140mA	10A	85.7 Ω	
26-1921	11	3PDT	120VAC	25mA	10A	$480.0 \Omega$	

## **Sockets**









In-Line					
Model #	Type				
26-1930	8–Pin				
26-1940	11-Pin				

DIN Rail/Surface Mount						
Model #	Type					
26-1925	8–Pin					
26 1025	11 Din					

MCM, an InOne company 650 Congress Park Drive Centerville, Ohio 45459 www.mcminone.com