



**A/V Media Converter
VGA + L/R Analog Audio
to HDMI
Model #33-11625**



Table of Contents

1.0 Introduction.....	2
2.0 Specifications.....	2
3.0 Package Contents.....	3
4.0 Panel Descriptions.....	4
5.0 Connection and Operation	4

Distributed Exclusively by
MCM Electronics
www.mcmelectronics.com

VGA + L/R Audio to HDMI Converter

Dear customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This device converts VGA input into HDMI and allows PC users to enjoy their larger image on TV. Additionally, L/R analog audio is added to the HDMI stream. It is ideal for users with a need to connect laptops or PC's to newer HD monitors and projectors.

1.1 FEATURES

This HDMI converter has many features that enable it to perform in a superior manner. These include:

- I Installs in seconds, no setup required.
- I Convert PC's VGA video and R/L audio into complete HDMI signal.
- I Supports highest video resolution 1280x1024.
- I Supports 165MHz/1.65Gbps per channel (6.75Gbps all channel) bandwidth.
- I Supports 8bit per channel (24bit all channel) deep color.

2.0 SPECIFICATIONS

Signal Inputs/Output	
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Output Video	HDMI 1.2a
VGA Resolution	640x480 60Hz 75Hz 800x600 60Hz 75Hz 1024x768 60Hz 75Hz 1280x720 60Hz 75Hz 1280x768 60Hz 75Hz 1280x960 60Hz 75Hz 1280x1024 60Hz 75Hz
Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	1.65Gpbs/165MHz
Mechanical	
Size (mm)	88 (W) x 25.5 (H) x 68 (D)
Weight (Net)	0.68kgs

Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 95 % RH (no condensation)
Power Requirement	
External Power Supply	5V DC@2A
Power consumption (Max)	5W
Regulatory Approvals	
Converter Unit	FCC,CE,
Power Supply	CE,FCC
Accessories	
AC Power Adapter	US standard
User Manual	

Note: Specifications are subject to change without notice.

3.0 PACKAGE CONTENTS


Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- I Main unit.
- I 5V DC Power Supply
- I User's Manual


4.0 PANEL DESCRIPTIONS

Please study the panel drawings below and become familiar with the signal input(s), output(s) and power requirements.

INPUT

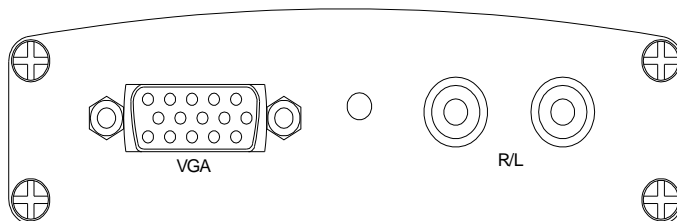

OUTPUT

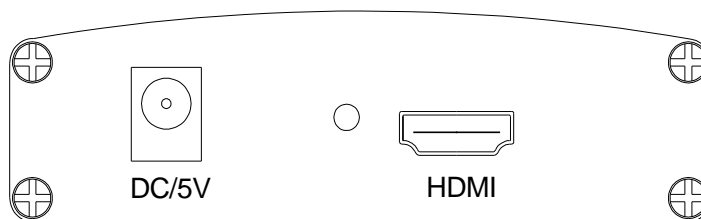

5.0 CONNECTION AND OPERATION

Before installation, please make sure all devices you wish to connect have been turned off.

- 1) Connect the VGA video and R/L audio from computer to this product.
(Input cables are optional)
- 2) Connect the HDMI output from this product to the TV which has HDMI input.
- 3) Connect the VGA and R/L audio output of this product to the computer's monitor and speaker if necessary.
- 4) Insert the DC side of 5v power supply into this product and then connect the AC side of the power supply into the wall outlet.
- 5) Power on the computer and TV, choose the input of TV to its HDMI channel.
- 6) The image does not need to be adjusted. This Converter will position it automatically.

Attention: Insert / Extract cables gently.

5.1 CONNECTION DIAGRAM

